

Designed for 12V vehicles, the STARTRONIC 800 is a smart battery-less booster pack. Equipped with supercapacitors, the device uses the vehicle battery's residual voltage to charge itself and start the engine in a few seconds. Recharging on the mains is not necessary.

STARTUP ASSIST


With its 800A starting power, it can start light vehicles (*gas & diesel*) equipped with a 12V battery **in 2 minutes**.

2 «forced» modes for maximum effectiveness:

- «**Bypass**» mode to start a vehicle with a deeply discharged battery.
- «**Glow**» mode (*pre-heating*) to start diesel vehicles in cold temperatures.



EASE-OF-USE

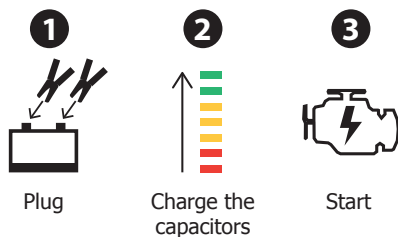

Micro USB port
(5V / 2A)

Power supply connector
(for 12V / 10A cigarette lighter socket)

SAFETY START

Safe electronic system:

- Anti short-circuit protection.
- Anti polarity inversion technology.
- Anti deep discharge protection.

MAINTENANCE FREE

- **Battery less technology.**
- **Always operational**, even after years in storage.
- Resistant to extreme temperatures (-40°C / +65°C).
- **Long life cycle**, it can be used 10 000 times without diminishing performance.

ADAPTED CONNECTORS

The STARTRONIC can be precharged in 3 different ways:

- on a 12V substitute battery (*liquid, gel, AGM, Start&Stop*) in 2 minutes.
- on a cigarette lighter plug (12V / 10A) in 3 minutes.
- via the micro USB cable (5V / 2A) in 40 minutes (*cable not supplied*).

Supplied with :











Transport bag



Cigarette lighter socket

COMPACT

Compact (1860g), it is easy to carry around and will easily fit in a car's boot.

START		Capacitors	C Capacitance	V	INPUT CHARGE							
					12V							
800 A	12V	5 x 800 F	160 F	12V	150 s	12V/10A	200 s	5V/2A	40 min	26.7 x 19.5 x 5	1.86	