

## QT-FIT5 3X14,4X14

QUICKTRONIC FIT 5 | ECG for FL 16 mm



### Areas of application

- Open-plan offices, corridors and storage rooms
- Public buildings
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Suitable for luminaires of protection class I
- Modernization of existing systems

### Product family benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

### Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Energy Efficiency Index EEI: A2
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Lamp operation: to EN 60929
- Safety: to EN 61347-2-3

## Product datasheet

### Technical data

#### Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	185...264 V <sup>1)</sup>
Operating frequency	40...50 kHz
Max. ECG no. on circuit breaker 10 A (B)	12 <sup>2)</sup>
Max. ECG no. on circuit breaker 16 A (B)	19 <sup>2)</sup>
Inrush current	40 A


<sup>1)</sup> Minimum voltage for lamp ignition: 198 V, 185...198 V for maximum 1 h

<sup>2)</sup> Type B

#### Light technical data

Starting time	2.0 s
---------------	-------

#### Dimensions & weight



Length	280.0 mm
Width	40.0 mm
Height	21.0 mm
Mounting hole spacing, length	270.0 mm
Product weight	202.00 g
Cable cross-section, output side	0.5...1.5 mm <sup>2</sup> <sup>1)</sup>
Cable cross-section, input side	0.5...1.5 mm <sup>2</sup> <sup>1)</sup>

<sup>1)</sup> Solid leads

#### Temperatures & operating conditions

Ambient temperature range	-15...+50 °C
---------------------------	--------------

## Product datasheet

Permitted rel. humidity during operation	5...85 % <sup>1)</sup>
--	------------------------

<sup>1)</sup> Maximum 56 days/year at 85 %

### Lifespan

ECG lifetime	50000 h
--------------	---------

### Additional product data

Suitable for lamp power (3 lamps)	14 W
Suitable for lamp power (4 lamps)	14 W

### Capabilities

Suitable for fixtures with prot. class	I
End of lamp life safety shutdown	EOL T.2
Max. cable length to lamp/LED module	1.0 m / 1.5 m
Dimmable	No


### Certificates & standards

Approval marks – approval	VDE / ENEC 10 / VDE-EMC
EEI – Energy Label	A2 BAT
Standards	Acc. to EN 61347-2-3/IEC 61347-2-3/Acc. to EN 55015:2006 + A1:2007 + A2:2009/Acc. to EN 61000-3-2/IEC 61000-3-2/Acc. to EN 61547/IEC 61547
Protection class	I
Type of protection	IP20

### Logistical data





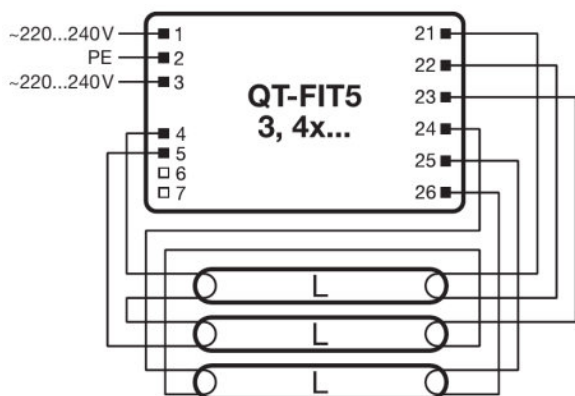





Commodity code	850410809000
----------------	--------------

## Wiring Diagram



Wiring diagram

## Download Data

File
 Product Datasheet 502688_ECG lifetime - QUICKTRONIC non DIM
 Product Datasheet 342812_QT-FIT5
 Certificates 339586_VDE-Marks approval
 Certificates 339588_EMC-Marks approval
 Certificates 592319_EAC certificate for Quicktronics QT
 Certificates 683441_ENEC-Marks approvals
 Declarations of conformity 339524_Declaration of Conformity (GB)
 Operating instructions 592456_EAC QT-FIT5
 CAD data 3-dim 339654_CAD QT-FIT5 3-DIM.x_t
 CAD data 3-dim 339655_CAD QT-FIT5 3-DIM.STEP

## Product datasheet



CAD data 3-dim  
339656\_CAD QT-FIT5 3-DIM.IGS



CAD data PDF  
339662\_CAD QT-FIT5

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321971210	QT-FIT5 3X14,4X14	Shipping carton box 20	300 mm x 118 mm x 168 mm	5.95 dm <sup>3</sup>	4217.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## QT-FIT5 3X14,4X14

QUICKTRONIC FIT 5 | ECG for FL 16 mm

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
QT-FIT5 3X14,4X14	HE 13 W ES	0.25 A	55.00 W	1150 lm	4
	HE 13 W ES	0.19 A	43.00 W	1150 lm	3
	HE 14 W	0.28 A	63.00 W	1200 lm	4