


KI Series Performance Data and Dimensions

| MODEL | MOTOR (HORSEPOWER) | CAPACITY (100 PSIG) | CAPACITY (125 PSIG) | CAPACITY (150 PSIG) | SOUND LEVEL (dB(A)) | DIMENSIONS (L x W x H inches) | WEIGHT (LBS) |
|--------|-----------------------|------------------------|------------------------|------------------------|---------------------------|----------------------------------|-----------------|
| KI-10 | 10 | 35 | 32 | 28 | 70 | 40x30x45 | 900 |
| KI-15 | 15 | 54 | 47 | 38 | 73 | 44x33x49 | 1250 |
| KI-20 | 20 | 82 | 76 | 61 | 73 | 44x33x49 | 1350 |
| KI-25 | 25 | 108 | 95 | 78 | 73 | 46x37x57 | 1600 |
| KI-30 | 30 | 124 | 108 | 99 | 73 | 46x37x57 | 1750 |
| KI-40 | 40 | 179 | 157 | 134 | 74 | 55x44x66 | 2500 |
| KI-50 | 50 | 241 | 215 | 187 | 74 | 55x44x66 | 2550 |
| KI-60 | 60 | 292 | 291 | -- | 75 | 77x46x62 | 3500 |
| KI-75 | 75 | 378 | 371 | -- | 75 | 77x46x62 | 3700 |
| KI-100 | 100 | 460 | 455 | -- | 76 | 95x46x65 | 4650 |

KIV Series Performance Data and Dimensions

| MODEL | MOTOR (HORSEPOWER) | CAPACITY (100 PSIG) | CAPACITY (125 PSIG) | CAPACITY (150 PSIG) | SOUND LEVEL (dB(A)) | DIMENSIONS (L x W x H inches) | WEIGHT (LBS) |
|---------|-----------------------|------------------------|------------------------|------------------------|---------------------------|----------------------------------|-----------------|
| KIV-10 | 10 | 11-33 | 11-29 | 9-25 | 70 | 42x30x45 | 950 |
| KIV-15 | 15 | 20-48 | 17-41 | 15-36 | 73 | 45x34x52 | 1300 |
| KIV-20 | 20 | 28-75 | 26-66 | 23-59 | 73 | 45x34x52 | 1400 |
| KIV-25 | 25 | 35-98 | 30-85 | 24-67 | 73 | 46x37x60 | 1650 |
| KIV-30 | 30 | 52-105 | 49-99 | 40-82 | 73 | 46x37x60 | 1800 |
| KIV-40 | 40 | 61-161 | 52-136 | 45-117 | 74 | 55x44x66 | 2600 |
| KIV-50 | 50 | 89-222 | 63-195 | 75-171 | 74 | 55x44x66 | 2650 |
| KIV-60 | 60 | 109-291 | -- | -- | 75 | 80x40x52 | 2900 |
| KIV-75 | 75 | 109-341 | 107-317 | 102-284 | 75 | 81x46x71 | 3750 |
| KIV-100 | 100 | 151-479 | 149-433 | 143-367 | 76 | 95x46x73 | 4750 |



10 HP



15-50 HP




60-100 HP



Air delivery in accordance with ISO-9300 and ISO-1217. All data subject to change without notice.
Allow at least 36 inches (92 cm) service clearance around assembly and 42 inches (107 cm) of clearance in front of electrical panels.

Tank Mounted Dimensions

| MODEL | TANK MOUNTED | | TANK MOUNTED w/DRYER | | |
|--------|-----------------|----------------------------------|----------------------|-----------------|----------------------------------|
| | WEIGHT (LBS) | DIMENSIONS (L x W x H inches) | DRYER | WEIGHT (LBS) | DIMENSIONS (L x W x H inches) |
| KI-10 | 1300 | 70x36x75 | HPR35 | 1432 | 82x36x75 |
| KI-15 | 1750 | 70x40x82 | HPR50 | 2029 | 82x40x82 |
| KI-20 | 1750 | 70x40x82 | HPR75 | 2029 | 82x40x82 |
| KI-25 | 2150 | 70x40x85 | HPR100 | 2485 | 82x40x85 |
| KI-30 | 2150 | 70x40x85 | HPR125 | 2485 | 82x40x85 |
| KIV-10 | 1350 | 70x36x75 | HPR35 | 1570 | 82x36x75 |
| KIV-15 | 1800 | 70x40x85 | HPR50 | 2097 | 82x40x85 |
| KIV-20 | 1800 | 70x40x85 | FLX1.1 | 2097 | 82x40x85 |
| KIV-25 | 2200 | 70x40x88 | FLX1.2 | 2602 | 82x40x88 |
| KIV-30 | 2200 | 70x40x88 | FLX1.2 | 2602 | 82x40x88 |

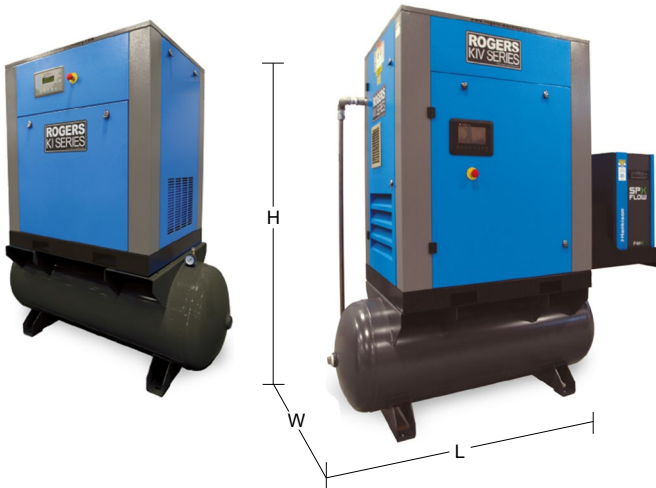

NOTE

KI/KIV 175 and 200 psi models are available. Please consult your factory representative for model and performance information.

K Series

ROGERS Machinery Company Inc.

3509 Galvin Rd.

Centralia, WA 98331

Phone: 360.736.9356

Fax: 360.736.8630

