
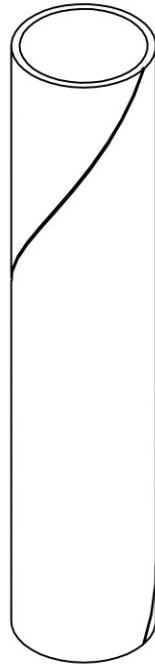


- NOTE(S):
1. PART NUMBER, "/00" DENOTES PART SHALL HAVE FINISH.
  2. APPLY NSF COMPLIANT GREASE TO ANY O-RING, SEALING JOINTS, AND/OR PIVOTAL POINTS.
  3. APPLY NSF COMPLIANT LOCTITE TO THREADED AREA.
  4. APPLY NSF COMPLIANT REMOVABLE (BLUE) LOCTITE TO THREADED AREA.
  5. SILVER SOLDER JOINTS SHALL BE FULLY WETTED VIA CAPILLARY ACTION AND COMPLETELY NON-POROUS.

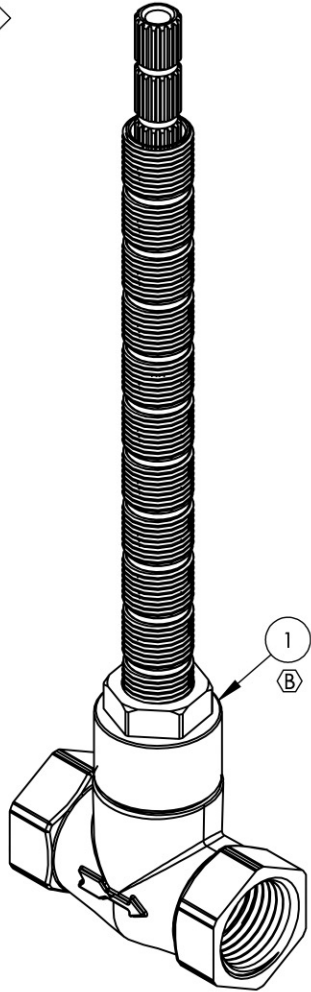

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	1-060	VALVE 1/2" IN-LINE STOP / VOLUME CONTROL COLD	1
	11666	BODY FORGED, SHUTOFF 1/2" NPT IN & OUT	1
	11540	CARTRIDGE, 1/2"G 20PT HOT, HI-TRQ LLL, EXACTO	1
	11416	STEM EXTENSION, 20PT TO 16PT, XXL	1
	92157	SCREW, SMALL HD M4X0.7 - 1/2"L	1
	11498	ALL THREAD, EXTENSION, 9/16"-20, 5-9/16"L, XXL	1
	11321	CARTRIDGE RETAINER NUT	1
	11648	MUD GUARD, CARDBOARD, LONG	1
	90011	O-RING, 5/16"ID X 1/16"THK, AS-568-011	2

C3	B	UPDATED DRAWING & COMPONENTS	1/31/2023	LFV
ZONE	REV.	DESCRIPTION	DATE	APPROVED
REVISIONS				

1261 LOGAN AVENUE  
COSTA MESA, CALIFORNIA 92626  
PHONE: 714.361.4800  
FAX: 714.617.3120

**PHYLIRICH**  
D.L. King, L.L. King & Co.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PHYLIRICH. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PHYLIRICH IS PROHIBITED.  
**DO NOT SCALE DRAWING**

VALVE, 1/2" IN LINE STOP / VOLUME CONTROL

SIZE <b>A</b>	ASM/PRT NO. 80607PHY	REV B
SCALE: 1:1.5	WEIGHT: lbs.	SHEET 1 OF 1