


The Cinema Series of LED LiteRibbon is the single best applied phosphor LED product available in the industry. With staggering CRI and full-spectrum output, the Cinema Series is 30% brighter than the previous VHO Pro LiteRibbon. This all-new LiteRibbon proudly joins the LiteGear Cinema family of unified color-space products including S2 LiteMat, LiteMat Plus, and LiteTile Plus.

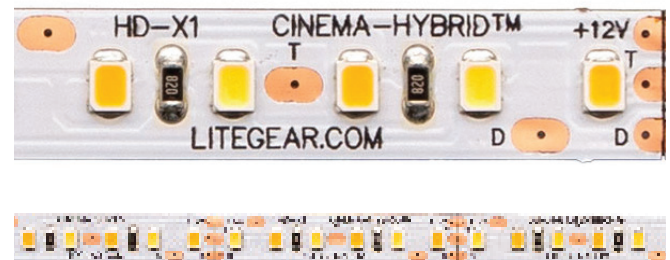

## 12 SPECIFICATIONS, 12V DC

<b>Product Name:</b> LiteRibbon Cinema Hybrid, X1 12V DC, 5 m
<b>Item Number:</b> LR-CS-12-HY-HD-X1
<b>Optical System:</b> Flexible LED tape
<b>Color Name:</b> Cinema Hybrid
<b>Power:</b> 100W (total potential power per 5 meter roll)
<b>Voltage Input:</b> 12V DC nominal (8-13.5V DC constant voltage)
<b>Current:</b> 8.33A (total potential current per 5 meter roll)
<b>CCT:</b> Hybrid 2600K (+/-100K), 6000K (+/-100K)
<b>CRI:</b> 95+ (2600K), 95+ (6000K)
<b>TLCI:</b> 96.2 (2600K), 98 (6000K)
<b>Beam Angle:</b> 120°
<b>Lumens per Meter:</b> 822.8 (2600K), 1002.2 (6000K)
<b>Weight:</b> 0.9 kg. (3.1oz.) (with input lead)
<b>Width:</b> 10 mm (0.47 in.)
<b>Length:</b> 5 m (16.4 ft)
<b>Ribbon Overall Thickness:</b> 1.5 mm (0.06 in.)
<b>Cut Segment Length:</b> 50 mm (1.96 in.)
<b>Cut Segments per Meter:</b> 20
<b>Total LED Quantity:</b> 600
<b>LEDs per Meter:</b> 120
<b>LEDs per Cut Segment:</b> 6
<b>LED Spacing:</b> 8.3 mm (0.33 in.) Center to Center
<b>Dimming Range:</b> 0-100%
<b>Operating Temperature:</b> -20°C to +50°C (68°F to +122°F)
<b>Connector:</b> Phoenix 3-Female
<b>Mounting:</b> PSA backing
<b>LED Lifetime:</b> 50,000 Hrs
<b>IP Rating:</b> 20
<b>Certifications:</b> UL Listed (Canada/US), CE Compliant (Europe)

## 24 SPECIFICATIONS, 24V DC

<b>Product Name:</b> LiteRibbon Cinema Hybrid, X1 24V DC, 5 m
<b>Item Number:</b> LR-CS-24-HY-HD-X1
<b>Optical System:</b> Flexible LED tape
<b>Color Name:</b> Cinema Hybrid
<b>Power:</b> 100W (total potential power per 5 meter roll)
<b>Voltage Input:</b> 24V DC nominal (16-26V DC constant voltage)
<b>Current:</b> 4.17A (total potential current per 5 meter roll)
<b>CCT:</b> Hybrid 2600K (+ / - 100K), 6000K (+/-100K)
<b>CRI:</b> 95+ (2600K), 95+ (6000K)
<b>TLCI:</b> 96.2 (2600K), 98 (6000K)
<b>Beam Angle:</b> 120°
<b>Lumens per Meter:</b> 806 (2600K), 1002.5 (6000K)
<b>Weight:</b> 0.9 kg. (3.1oz.) (with input lead)
<b>Width:</b> 10 mm (0.47 in.)
<b>Length:</b> 5 m (16.4 ft)
<b>Ribbon Overall Thickness:</b> 1.5 mm (0.06 in.)
<b>Cut Segment Length:</b> 100 mm (3.94 in.)
<b>Cut Segments per Meter:</b> 10
<b>Total LED Quantity:</b> 600
<b>LEDs per Meter:</b> 120
<b>LEDs per Cut Segment:</b> 12
<b>LED Spacing:</b> 8.3 mm (0.33 in.) Center to Center
<b>Dimming Range:</b> 0-100%
<b>Operating Temperature:</b> -20°C to +50°C (68°F to +122°F)
<b>Connector:</b> Phoenix 3-Female
<b>Mounting:</b> PSA backing
<b>LED Lifetime:</b> 50,000 Hrs
<b>IP Rating:</b> 20
<b>Certifications:</b> UL Listed (Canada/US), CE Compliant (Europe)

### PHOTOMETRIC DATA 12V

	12 in. FC (spread, in.)	30 cm. Lux (spread, cm.)	24 in. FC (spread, in.)	61 cm Lux (spread, cm.)	36 in. FC (spread, in.)	91 cm. Lux (spread, cm.)	48 in. FC (spread, in.)	122 cm Lux (spread, cm.)	60 in. FC (spread, in.)	152 cm. Lux (spread, cm.)
2600K, 12V	216 (37 x 28.6)	2325 (94 x 73)	54 (79 x 57.2)	581 (201 x 145)	24 (110 x 85.5)	258 (282 x 217)	13.5 (147.8 x 114.4)	145 (375 x 291)	8.6 (184.8 x 143)	93 (468 x 363)
3950K, 12V	243.2 (37 x 29.6)	2618 (94 x 75)	60.8 (73.9 x 59.3)	654 (188 x 151)	27 (110.9 x 88.9)	291 (282 x 226)	15.2 (147.8 x 118.6)	164 (375 x 301)	9.7 (184.8 x 148.2)	105 (468 x 376)
6000K, 12V	265.6 (37 x 28.6)	2859 (94 x 73)	66.4 (73.9 x 57.2)	715 (188 x 145)	29.5 (110.9 x 85.8)	318 (282 x 218)	16.6 (147.8 x 114.4)	179 (375 x 291)	10.6 (184.8 x 143)	114 (468 x 363)

### PHOTOMETRIC DATA 24V

	12 in. FC (spread, in.)	30 cm. Lux (spread, cm.)	24 in. FC (spread, in.)	61 cm Lux (spread, cm.)	36 in. FC (spread, in.)	91 cm. Lux (spread, cm.)	48 in. FC (spread, in.)	122 cm Lux (spread, cm.)	60 in. FC (spread, in.)	152 cm. Lux (spread, cm.)
2600K, 24V	236.8 (39.9 x 27.6)	2549 (101 x 70)	59.2 (79.9 x 55.2)	637 (203 x 140)	26.3 (119.8 x 82.8)	283 (304 x 210)	14.8 (159.8 x 110.4)	159 (406 x 281)	9.5 (199.7 x 138)	102 (507 x 351)
3950K, 24V	304 (39.9 x 27.6)	3272 (101 x 70)	76 (79.9 x 55.2)	818 (203 x 140)	33.8 (119.8 x 82.8)	364 (304 x 210)	19 (159 x 110.4)	205 (406 x 281)	12.2 (199.7 x 138)	131 (507 x 351)
6000K, 24V	286.4 (41.6 x 27.6)	3083 (106 x 70)	71.6 (83.1 x 55.2)	771 (211 x 140)	31.8 (124.7 x 82.8)	343 (317 x 210)	17.9 (166.3 x 110.4)	193 (422 x 281)	11.4 (207.8 x 138)	123 (528 x 351)

### ACCESSORIES

#### Control


LD-PRO-HYBRID	LiteDimmer Hybrid 8A
LD-PRO-HYBRID-HICAP	LiteDimmer Hybrid 16A

#### Power Supply


PS-12V-8A-F-UL	Power Supply, Desktop, 12V DC, 8A, 96W
PS-12V-16A-PH	Power Supply, Desktop, 12V DC, 16A, 240W

#### Cable Extension

CA-PH3-EXT-12F-FLAT-B	Phoenix-3 Extension Cable, 12 ft.
-----------------------	-----------------------------------

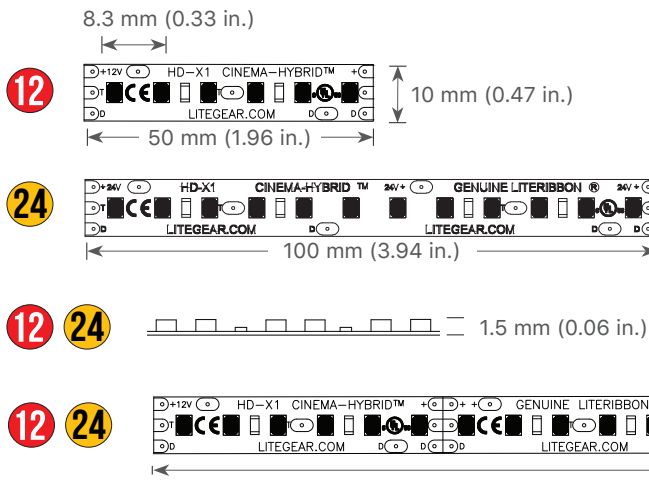

### TUNGSTEN — SPECTRAL DISTRIBUTION

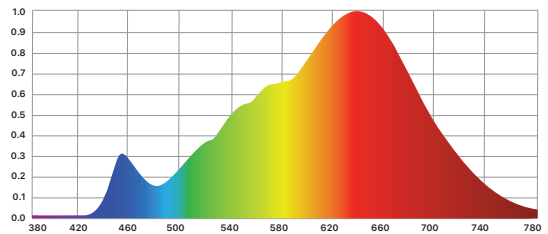

### DAYLITE — SPECTRAL DISTRIBUTION

