


## INFORMATION

MOTOR:	Capacitor Motor.Impadence protected or Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP) or plated (AN)
IMPELLER:	Glass reinforced thermoplastic, UL 94V-0
BEARING:	Two-ball or sleeve available
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type -20°C~+70°C;Sleeve type -10°C~+55°C
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
LIFE EXPECTANCY:	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
WEIGHT:	2.880 gm

sA22580

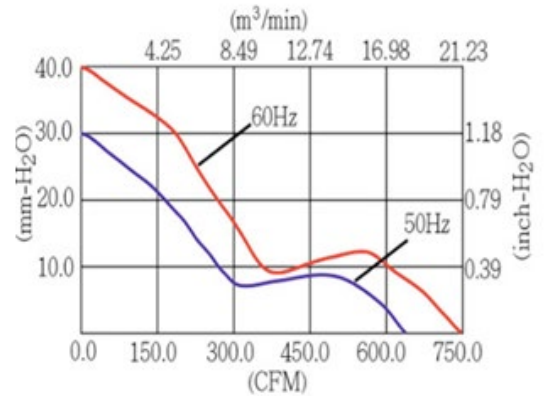

## SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	inch-H <sub>2</sub> O	
sA22580V1H	115	50/60	2920/3450	0.98/0.90	78/98	17.8/21.2	630/750	30/40	1.18/1.57	63/67
sA22580V2H	230	50/60	2920/3450	0.45/0.45	88/105	17.8/21.2	630/750	30/40	1.18/1.57	63/67