

LED 2029

FLEXIBLE STRIP LIGHT



12 V SYSTEM



- > *CRI 90 lights are Title 24 Compliant
- > *CRI 90 lights offer more vibrant, true color rendering than lower CRI products
- > Ideal for direct and extremely even illumination of furniture
- > Strip can be shortened every 25 mm (1")
- > Corner connections allow for 90° installations
- > Self-adhesive installation
- > Dimmable
- > Installation only with aluminum profile



- > Driver see page 56
- > Aluminum profiles see pages 108-112

2700 K	3000 K	4000 K	5000 K	120°
2054 lx	2090 lx	2215 lx	2275 lx	250 mm (9 13/16")
514 lx	522 lx	554 lx	569 lx	500 mm (19 11/16")
228 lx	232 lx	246 lx	253 lx	750 mm (29 1/2")
128 lx	130 lx	138 lx	142 lx	1000 mm (39 3/8")

Note
The values above apply to a strip light length of 0.5 m (19 11/16").

Item No.	833.73.190	833.73.191	833.73.192	833.73.193	833.73.660	833.73.661	833.73.662	833.73.494	833.73.495	833.73.496	833.73.497
SRP	\$250.00	\$250.00	\$250.00	\$250.00	\$260.00	\$260.00	\$260.00	\$570.00	\$570.00	\$570.00	\$570.00
Light Color (K)	2700 (warm white)	3000 (warm white)	4000 (cool white)	5000 (cool white)	2700 (warm white)	3000 (warm white)	4000 (cool white)	2700 (warm white)	3000 (warm white)	4000 (cool white)	5000 (cool white)
L x W x H	5 m x 10 mm x 1.3 mm (196 7/8" x 3/8" x 1/32")							15 m x 10 mm x 1.3 mm (590 1/2" x 3/8" x 1/32")			
Wattage	48 (9.6 per meter) (3.0 per foot)							144 (9.6 per meter) (3.0 per foot)			
LEDs	600 (120 per meter) (36 per foot)							1800 (120 per meter) (36 per foot)			
Lumen	4050	4075	4100	4150	4050	4075	4100	12150	12225	12300	12450
Lumen per watt	84	85	85	86	84	85	85	84	85	85	86
CRI					90*			82			

Energy Efficiency class: A+

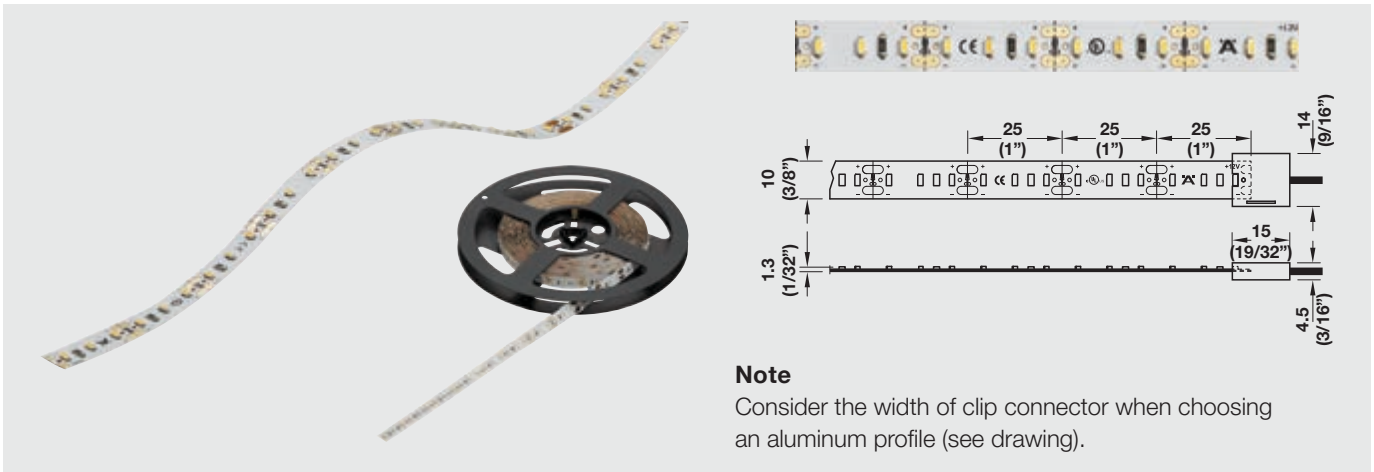
Weighted energy consumption: 10.56 per meter

Material/Finish: Plastic, white

Supplied with: 2 m (78 3/4") lead






Note Loox Lights and Drivers are "Suitable for use within Closet Storage Spaces"







LED 2029



Note

Consider the width of clip connector when choosing an aluminum profile (see drawing).

-  Max. strip length per lead: 3.6 m (11' 9 1/2")
Max. watts per lead: 42
-   Corner connector, rigid, max. 3.5 A, left and right
> Item No. 833.73.733 **SRP \$2.00**
-   Interconnecting lead, 3.5 A/20 AWG, with clip
> 50 mm (2")
Item No. 833.73.767 **SRP \$4.00**
> 500 mm (19 11/16")
Item No. 833.73.768 **SRP \$4.00**
> 1000 mm (39 3/8")
Item No. 833.73.769 **SRP \$4.00**
> 2000 mm (78 3/4")
Item No. 833.73.770 **SRP \$6.00**

-   Lead, 3.5 A/20 AWG, with 12 V male plug and clip
> 100 mm (4")
Item No. 833.73.778 **SRP \$4.00**
> 2000 mm (78 3/4")
Item No. 833.73.739 **SRP \$6.00**
-   Lead, 3.5 A/20 AWG, with 12 V female plug and clip
> 100 mm (4")
Item No. 833.73.779 **SRP \$4.00**
-   Clip connector, max. 3.5 A,
> Item No. 833.73.731 **SRP \$2.00**

