



LIGHTED VENT TRIM FOR ROAD GLIDE

Parts Included:


- 1 Lighted Vent Trim

Installation Instructions:

1. Remove windshield screws (circled below) and remove windshield. (Fig. 1)
2. Lift the front edge of plastic vent to disengage plastic clips and remove. (Fig. 1)



3. Locate the accessory plug-in on the brake side of your inner fairing and plug in the vent trim. (Fig. 2)
4. Test to make sure the LEDs function correctly when you turn on your ignition switch.
5. Clean the surface where your vent trim will stick with an ammonia based cleaner to remove any wax or contaminants.
6. Test fit the vent trim before peeling off the adhesive backing. The lines of the vent trim should match up with your fairing. (See red lines below)
7. Center the vent trim and mark where you are going to place it with masking tape.
8. Peel off the adhesive backing and stick the vent trim where you marked your fairing with tape. Apply pressure for 30 seconds to bond adhesive.

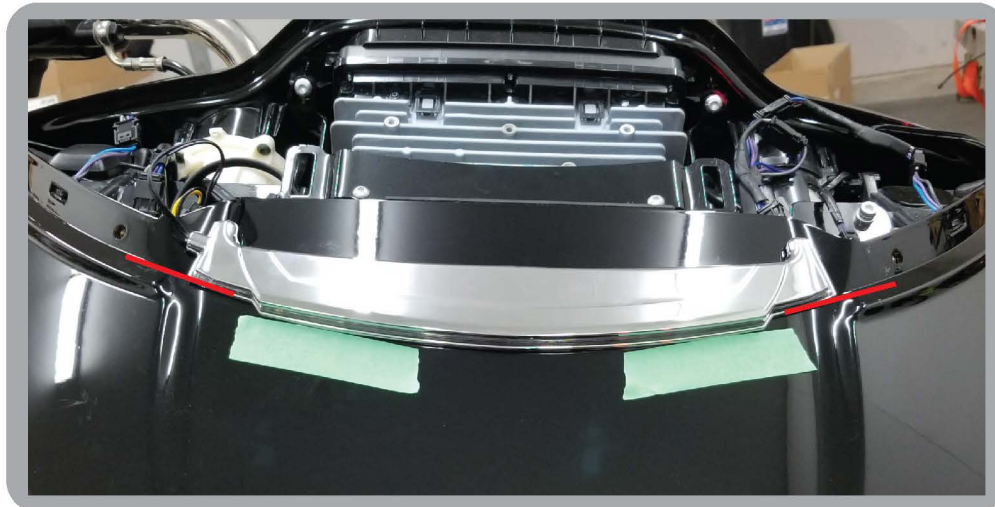

9. Re-install the plastic trim from step 2.
10. Re-install your windshield.

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure.

Giro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products.

Please visit our website Ciro3d.com for our complete warranty policy.