

hi-flame

OUTSTANDING ECODESIGN STOVES

Instruction Manual

Model HFB-443 Aidan® Eco Boiler Free-standing Cast Iron Boiler Stove

This appliance has been independently CE tested by an EU Notified Laboratory and is approved for burning fully seasoned wood with less than 20% moisture content. It must be operated at all times in accordance with these instructions in order to minimise the amount of smoke produced. Published July 2023



Serial
Number

Date of
Purchase

Please note You will need to refer to the model and serial number of your stove in the unlikely event that you need to make a claim under the Hi-Flame Warranty or if you wish to purchase any replacement parts. You will find the serial number, beginning with HFB, on the CE plate at the rear of the stove as well as on the lid of the outer packaging the stove was delivered in. We suggest that for convenience you write this on the cover of this Instruction Manual.



Ref: HFB-443 / ROI / V3.20.02.24

www.hi-flame.ie

IMPORTANT: USER WARNING NOTES

When it is properly installed, operated and maintained this stove should NOT emit smoke or fumes into the dwelling.

Occasionally fumes from refuelling may occur.

However, persistent smoke or fume emission is potentially dangerous and must not be tolerated. If this persists, then the following immediate action should be taken:

- Quickly open the doors and windows to ventilate the room.
- Make sure that the stove door is closed and that the combustion air controls are fully open. It may be that the open door or a fully closed control have contributed to the problem.

The above actions should then ensure that any remaining fuel will combust as normal and will not smoulder to create even more unwanted smoke or fumes.

However, if smoke and fumes persists then leave the premises and let the fire go out.

- Wait until the room clears of smoke and the stove is cold.
- Check for a flueway, connecting flue pipe or chimney blockage and clean out if required.
- Check that the wood logs you have used are fully seasoned with a moisture content of less than 20%. Wet wood will always produce excessive smoke as well as create an acrid smell.
- Do not attempt to relight the fire until the cause of the smoke or fume emission has been identified and corrected. If necessary seek expert advice, preferably from a Hetas, OFTEC or INFO installer.
- The most common cause of smoke or fume emission is flueway or chimney blockage. For your own safety these should be inspected regularly and must be kept clean at all times. See pages 14 – 15.

If the CO alarm (which should be fitted at the time of installation) sounds, please follow the advice above.

A WORD ABOUT TODAY'S HIGHLY SENSITIVE SMOKE DETECTORS AND CARBON MONOXIDE (CO) ALARMS


It's good to know that we can all depend upon today's highly efficient smoke alarms and carbon monoxide detectors to ensure our safety. However, it is worth pointing out that when you light your stove for the first five or six times the fumes from the new paintwork, as it cures, may cause the smoke alarm to sound.

This can usually be prevented by greatly increasing the ventilation to the room during the paint curing process.

In new build properties smoke alarms and CO detectors are often interlinked and will sound throughout the home when either one of them detects an issue, such as fumes from paintwork curing. Again, when using the stove greatly increase the ventilation in the room to help prevent this.

Should the alarm soundings continue beyond the first five or six fires and / or not respond to increasing the ventilation then, in the first instance, please consult your stove installer or property developer.

NB: A CO alarm is now mandatory for all stove installations in the UK and Ireland.

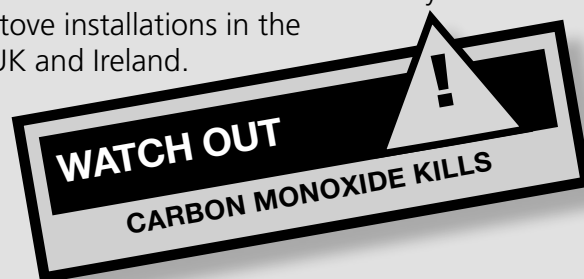

NEVER OPERATE THIS STOVE WITHOUT IT BEING CONNECTED TO WATER
Under no circumstances operate this boiler stove without it being connected to a hot water system or without water in the boiler. When filling the system always use a proprietary chemical water treatment to protect the boiler from corrosion and the build-up of solid deposits.

Aidan® Eco Boiler Model HFB-443 Free-standing Cast Iron Boiler Stove



INTRODUCTION

Thank-you for purchasing this Hi-Flame Aidan® Eco Boiler stove. We are confident that it will keep your home warm even on the very coldest winter days and provide you with many years of pleasurable heat.

However, before you install or operate your boiler stove, in the interests of safety please read this booklet which contains important safety advice as well as operating instructions which will help you make the most of your new boiler stove.

All users of this stove should be aware of the contents of this handbook. If other people are likely to operate the stove then please keep this booklet handy so that it can always be quickly referred to. Never let anyone use the stove who is unfamiliar with its correct and safe operation.

AIDAN ECO BOILER PRODUCT VERIFICATIONS

This boiler stove has been tested to CE EN13240 standards by the Test Engineering Test Institute of Brno, Czech Republic (EU Notified Laboratory Number 1015) and also meets the latest EU Ecodesign emissions and efficiency requirements. This product is registered on the HARP Database which can be accessed for BER and SAP calculations.







This instruction manual is also used for a number of other boiler stove models in the Hi-Flame product range and therefore some of the stove photographs and diagrams used, which are used for guidance purposes only, may differ slightly from your new Hi-Flame Aidan® Eco Boiler stove. However, the principles illustrated here remain the same.

Hi-Flame Fireplace (UK) Limited

CONTENTS

	Page		Page
Aidan Eco Boiler Product Verifications	3	System Essentials	26
General Dimensions	5	<i>Heat leak radiator</i>	
General Specifications	6	<i>Adjustable circulating pump</i>	
<i>including minimum distances</i>		<i>Electrical connections</i>	
Permanent Air Supply	6	<i>Mains water connection</i>	
Standard Features and Controls	6	<i>Gravity circuit pipework</i>	
Product Fiche	7	<i>High and low limit thermostats</i>	
ErP Energy Label	8	<i>Hot water cylinder</i>	
Packing List	9	<i>Thermostatic radiator valves (TRVs)</i>	
Important Safety Advice	9	Basic System Diagram	27
Boiler Stoves: Specific Safety Issues	10	System Balance	28
Health and Safety	10	Important: First Fires	28
<i>Asbestos</i>		A Note About Condensation	28
<i>Fire Cement</i>		Trouble-shooting	29 – 32
<i>Handling</i>		<i>Chimney fire</i>	
<i>Metal Parts</i>		<i>Components glowing red</i>	
Buildings Insurance	10	<i>Smoke and fumes escaping</i>	
Building Regulations	11	<i>Overheating</i>	
Installation Regulations	11	<i>Excessive fuel consumption</i>	
UK Smoke Control Areas	11	<i>Not enough heat</i>	
Assembling the Stove	12	<i>Glass blackening</i>	
Attaching the legs	13	<i>Not enough system heat or hot water</i>	
Removing the Baffle Plate	14	Routine Checks	32
Stoves with Vermiculite Panels	14	Regular Maintenance	33 – 34
Accessing the Flueway	15	Standing Down	34
Preferred Fuel	16	Aidan Eco Boiler Spare Parts	34
Fuels you should avoid	16	Replacement Consumables	34
Using the Ash Pan and Tool	16	<i>Glass size</i>	
How to burn wood efficiently	17	<i>Glass gasket seal</i>	
Controlling the combustion air	17	<i>Firechamber door rope seal</i>	
Fuel Load Weight and Log Size	18	<i>Ash chamber door seal</i>	
Lighting a Wood Fire	18 – 20	<i>Firebricks</i>	
<i>Refuelling</i>		The Hi-Flame® 5 Year Warranty	35 – 36
<i>Controlling the boiler temperature</i>		<i>Stove owner's responsibility</i>	
Some simple wood burning tips	20	<i>Terms and conditions</i>	
Removing Ash	20	<i>What the warranty covers</i>	
How to Burn Approved Smokeless Coal	20 – 21	<i>What the warranty does not cover</i>	
Extended Burning	21	<i>Limits of the Warranty</i>	
Installation Check-list	22	Annual Service	36
Appliance Installation: General Guidelines	23 – 24	Annual Service Record	37
System Installation: General Guidelines	25	Commissioning	38
		<i>Smoke test</i>	
		<i>Spillage test</i>	
		<i>Legal requirements</i>	
		<i>Carbon monoxide (CO) detector</i>	
		System Notes and Settings	39

GENERAL DIMENSIONS

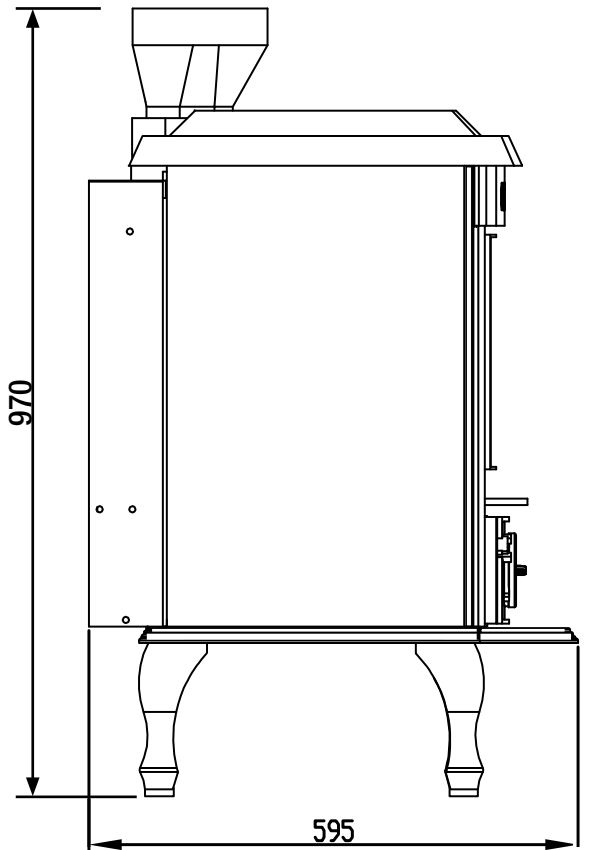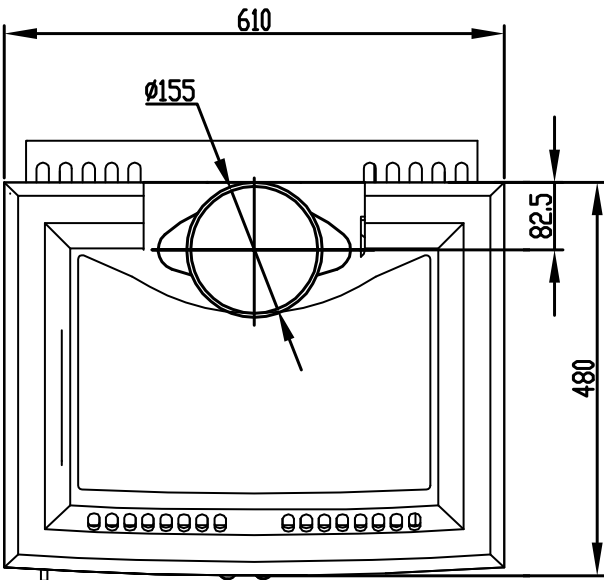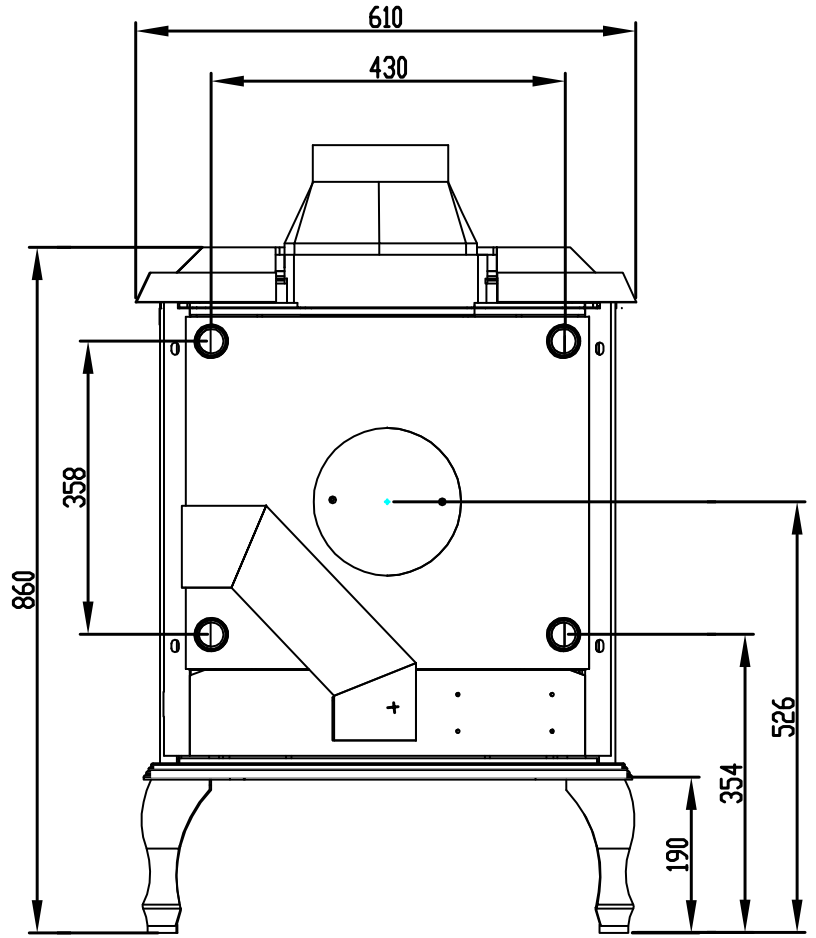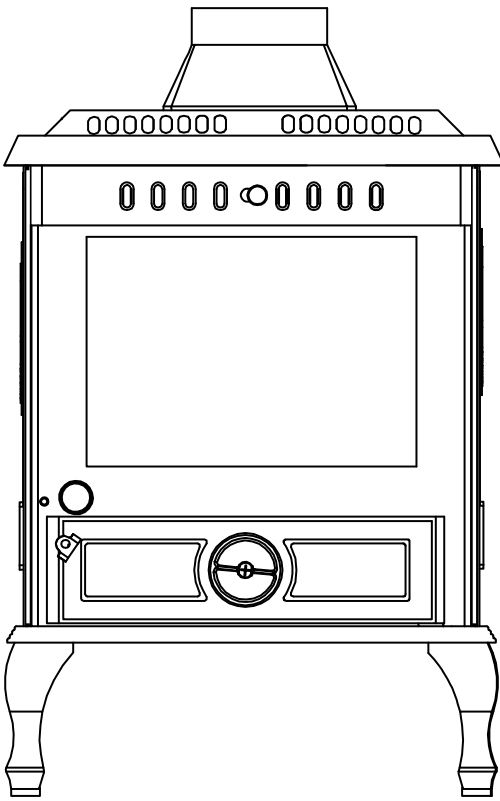

All sizes in mm
Important: Take all critical pipework measurements from the stove on site

GENERAL SPECIFICATION

The materials, design, construction and operation, as well as marking, meet or exceed the current EN13240 Type Test and Ecodesign regulation requirements

MODEL DETAILS

Model Name	Hi-Flame Aidan Eco Boiler
Model Number	HFB-443
Dimensions (mm)	H860 W610 D595
Net Weight	223kg

PREFERRED FUEL

Wood Logs: Moisture content	<20%
Recommended Wood Fuel Load	4.8 kg (10lb 8oz)
Maximum Log Length	325 mm (13")

PERFORMANCE

Intermittent Burning – 0.75 hour refuel period	
Nominal Heat Output	To Space 5.0 kW
	To Water 7.5 kW
Maximum Heat Output	To Water 11.2 kW
Total heat output	16.2 kW
Efficiency (net)	76.9%
Seasonal efficiency	67%
ErP Energy Label	A
Energy Efficiency Index (EEI) ₃	102
CO @13% O ₂ (%): Nmg/m ₃	0.14
PM @13% O ₂ (g): Nmg/m ₃	38
OGC @13% O ₂ (%): Nmg/m ₃	116
NOx @13% O ₂ (%): Nmg/m ₃	195
Mean Flue Gas Temperature	343°C
Flue Gas Mass Flow	12.9 g/s
Manufactured Smokeless Coal:	
Nominal Heat Output	To Space 5.9 kW
	To Water 10.6 kW
Total heat output	16.5 kW
Efficiency (net)	76.7%
Seasonal efficiency	72.8%

SAFE DISTANCES TO COMBUSTIBLES

We do not recommend the use of combustible mantels.

Minimum Distance from Combustible Materials:	
Sides	125 mm
Rear	375 mm

FLUE

Flue configuration	top or rear
Flue outlet diameter	150 mm (6")
Minimum flue height	4,500 mm (15')

BOILER

Factory pressure tested to 3.5 Bar maximum	
Water capacity	17kg / 17L (3.7 Gal)
Maximum operating Pressure	<1.5 Bar (0.15Mpa)
Pipework ports	Four x 1" BSP
NB When using 2 tapings they must be diagonal	

CE EN3240:2002+ amd A2:2004 data taken from Engineering Test Institute, Brno, Czech Republic reports E-30-00655-09 (+E-30-9087, E-30-6437 and 30-6437/1) and manufacturer's CEN/TS 15883, FprEN 16510-1:2013 DIR 2009/125/EC Declaration of Performance 06.23

PERMANENT AIR SUPPLY – IMPORTANT

The total rated output of this stove is 16.2kW. Building Regulations permanent ventilation requirements should be based on this total output and *not just* the stove's output to the room. For example, Approved Document J of UK Building Regulations gives more detailed information about air supply.

STANDARD FEATURES

1 Primary Air Boost Control Air which enters under the grate to assist a wood log fire to get quickly started and to control smokeless coal fires

2 Secondary Air Control Air which enters at the top of the firechamber to ensure a cleaner burn and provide more effective control of the combustion and flame height for wood (pull out, then slide to open).

3 Airwash System Part of the secondary Air control system which diverts hot air down along the inside front of the glass to burn off unwanted sooty particulates and help keep it clean.

4 Thermostat Control Right hand side – this adjusts the temperature of the water leaving the boiler from low to high by controlling part of the combustion air supply to the firechamber.


5 External Riddler Use the tool provided to slot into the riddler bar knob to move the riddling grate backwards and forwards and remove ash.




PRODUCT FICHE AND ERP LABEL

EU Commission Delegated
Regulation 65 / 2014

AIDAN ECO BOILER STOVE

Trademark	Hi-Flame	
Product Name & Model Number	Aidan Eco Boiler Stove HFB-443	
Product Description	Solid Fuel Roomheater with Boiler (Wood)	
CE EN Standard Type Test	EN 13240:2001 + Amd 2:2004	
EU Notified Test Body / Number	Engineering Test Institute 1015	
Nominal Heat Output Room / Water	5.0 kW	7.5 kW
Nominal Net Efficiency	76.9%	
Nominal Gross Efficiency	70.0%	
Seasonal Efficiency <small>Under average climate</small>	67.0%	
Seasonal space heating energy (EEI)	102	Energy Class 



ENERG


енергия · ενεργεια



hi-flame

QUALITÄT UND SICHERHEIT

Aidan Eco Boiler Stove
HFB-443

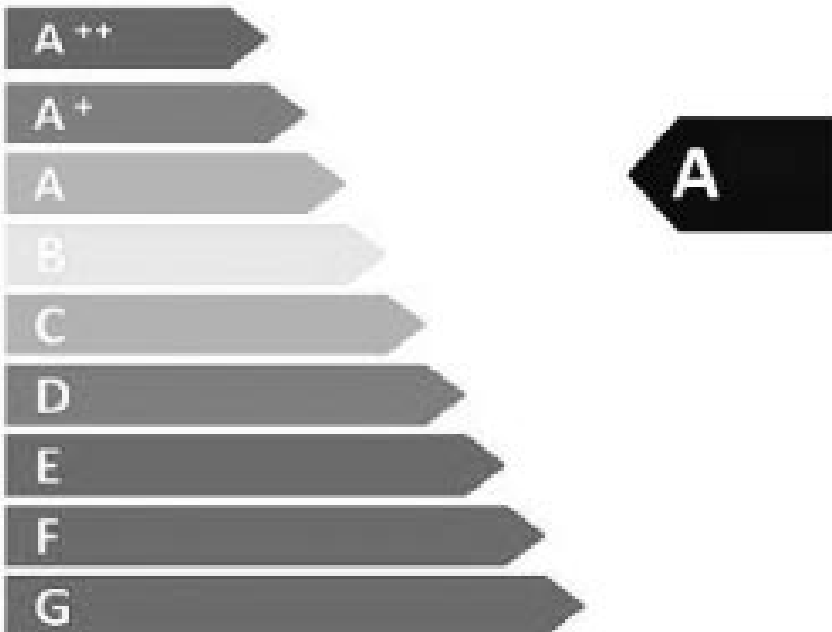

5,0
kW

7,5
kW

ENERGIA · ЕНЕРГИЈА · ΕΝΕΡΓΕΙΑ · ENERGIA · ENERGY · ENERGIE · ENERGI

2018/1186

PACKING LIST

As soon as you receive your new Aidan Eco Boiler please check that you have a full set of components as set out in the list below. In the unlikely event of a shortage, please report this immediately to the dealer you bought the stove from. Never attempt to operate the stove with missing or damaged components.

Product Information

A This Instruction Booklet

B Stove Serial Number

Stove Components

C Main Door Handle Grip and Securing Bolt

D Smaller Ash Door Handle Grip and Securing Bolt

E Firegrate and Carrier Frame (base of firechamber)

F Fire Fence (In place at front of firechamber)

G Baffle Plate (located inside roof of firechamber)

H Shaped Top Flue Collar (used when using top flue)

I Top Flue Blanking Plate (used when using rear flue)

J 4 x Legs with Fixing Bolts and Washers

K Vermiculite Fire Brick Set (if specified)

Equipment

L Ash Pan

M Operating Tool (Ash Pan Handle)

IMPORTANT SAFETY ADVICE

- Ensure that an approved carbon monoxide detector (BS EN50291:2001) is fitted in the same room as the stove. It should be powered by a battery designed for the working life of the alarm. *Please note* this is now a requirement under ROI and UK Building Regulations.
- External surfaces including the fire chamber door and controls, windows and stove bodywork will become extremely hot. Always use the tool provided and avoid touching these parts of the stove without proper protection, such as heat-resistant gloves or other protective aids.
- Potentially combustible material or objects such as soft furnishings should never be left on or near any of the stove's hot surfaces. Ensure that wood supplies and log baskets are kept at a safe distance from the stove. See *Minimum Distance to Combustibles* page 6.
- Never leave children unattended in the room where your stove is being operated. Ensure that children are aware of the potential danger and make sure that they keep clear of the stove when it is in operation. Where children, the elderly or the infirm are present always use a fireguard manufactured in accordance with BS 8423:2002 to prevent accidental contact with the stove.
- This stove should *not* be fitted in a room with an extractor fan (eg kitchen) as this will adversely effect the air quality in the room and could be dangerous for the room's occupants. It may also starve the stove of combustion air and reduce the stove's efficiency.
- To ensure your safety make sure that your stove's installation complies with all local, national and European building regulations' ventilation requirements. Low energy houses have their own particular requirements and these should be strictly adhered to.
- Do not use flammable liquids to ignite the fire. In the confined space of the stove's fire chamber there is a real potential to cause a life-threatening flash flame or explosion.
- Never over-fire the stove. If any external parts of your stove glow red during operation then immediate action should be taken to reduce the supply of combustion air to the fire chamber through the Primary, Secondary and Thermostatic Air controls which should quickly limit the intensity of the fire.
- This stove is CE approved and tested to EU EN13240 standards in the EU by the Engineering Test Institute (SZU) of Brno, Czech Republic. Alterations to its construction could be potentially dangerous and will also render your product warranty void.
- Do not use aerosol products in the vicinity of the stove when it is in use.
- Check and clean the stove's flueway and the top of the baffle plate regularly to help avoid potential blockages and clean your chimney regularly (page 14).

BOILER STOVE SYSTEMS – SPECIFIC SAFETY ISSUES

- If there is a possibility that part of the heating system may be frozen you should not light the stove until you are confident that the system is free of ice, has no leaks and that the water can fully circulate.
- This stove requires a dedicated non-closable air vent of the appropriate size – see page 6.
- The system should not rely solely on gravity fed circulation but must also incorporate a circulation pump – see System Essentials pages 25 – 26.
- This stove should not be connected directly to a sealed or pressurised system without including a safety ‘buffer’ between the systems such as a thermal store, heat exchanger or specialist link-up component. This will also help neutralise any pipe size difference between the two systems which could adversely affect performance (see pages 25 – 26).
- The cold feed and open vent flows must not be fitted with any manual or automatic valve. The system flow must not be able to be ‘closed off’ so that there is always a clear flow route from the stove to the system’s open vent.
- In the event of a power cut or circulation pump failure your stove will continue to produce hot water which could be potentially dangerous. Your system design should therefore provide for the safe dissipation of excess hot water through a heat loss or heat leak radiator (see pages 25 – 26).
- Motorised valves must revert to the open position in the event of a power failure. This will allow heat to be safely dissipated through the system’s natural gravity circulation process.
- Although it is common practice for heat leak radiators to be located in an upstairs bathroom it is worth noting that on some boiler stove systems the heat leak radiator can get very hot and therefore we recommend installing a low surface temperature type radiator and / or locating it where young children or the infirm won’t accidentally come into contact with it.
- The heat output to water from this boiler stove must not be significantly greater than any potential usage. The system’s heat release feature, especially if linked, must be sufficient to prevent the system from over-heating.
- The system design must incorporate a drain point, preferably near the boiler stove, and be sufficient to empty the system of any residue water during maintenance or stove removal.
- All electrical connections, for example to system valves, the circulating pump and the link-up component must comply with current Building Regulations. Ensure that the pipework is correctly earthed. See page 8 and 25 for relevant regulations.

- The mains water connection to the system must comply with local water authority regulations in order to safeguard water quality and public health – see pages 8 and 26
- The hot water cylinder thermostat should be set at 60°C (and tested) to prevent scalding – see page 25.

HEALTH & SAFETY

During the installation of this stove and any related building works you must comply with any current Health & Safety at Work regulations. Always use protective gloves and use the tool when adjusting the air controls. When using fire cement always follow the manufacturer’s instructions.

ASBESTOS

This stove does not contain Asbestos. However, check that there is no possibility of disturbing any asbestos based materials during its installation. You may intend removing an older appliance prior to installing your new stove, and you should be aware that the old appliance or installation could incorporate heat protective asbestos sheet. Use appropriate protective equipment and seek specialist guidance at www.hse.gov.uk/asbestos – do not underestimate the potential dangers of Asbestos.

FIRE CEMENT

Some types of fire cement are caustic and should not be allowed to come into contact with the skin. Protective gloves and glasses should be worn when applying fire cement. In case of contact wash immediately with plenty of water. Always read and follow the fire cement manufacturer’s instructions.

Care should also be taken to avoid unnecessary contact between the stove’s surfaces and the fire cement as this could damage the paintwork. Any excess fire cement should be quickly removed before it hardens.

HANDLING

The Aidan Eco Boiler stove is extremely heavy and therefore adequate facilities must be available for its safe loading, unloading and site handling.

METAL PARTS

When installing or servicing this stove care should be taken to avoid the possibility of personal injury from the stove’s metal parts.

BUILDINGS INSURANCE

It is a requirement by some building insurance companies to inform them of the installation of a new fixed heating appliance and a relevant certificate of compliance for the installation work produced.

BUILDING REGULATIONS

In the Republic of Ireland and United Kingdom most installations of solid fuel appliances and systems are subject to the requirements of Building Regulations. These regulations must be observed and such installations need to be notified to the relevant Local Authority Building Control department by law.

Hetas (www.hetas.co.uk) and OFTEC (www.oftec.org) are two of the official bodies recognised by the UK Government to approve solid fuel stove installations and the registration of competent installers. Their installers can self-certificate their work in England and Wales thus avoiding the need for costly and time consuming building notice applications. They will provide you with a certificate of compliance upon completion of the installation and send a copy to Hetas for onward notification to your local authority. The certificate of compliance is an important record demonstrating that the work was carried out legally and in accordance with the relevant Building Regulations and by a trained and competent installer from a registered business.

Should you ever wish to sell your property, the information about work carried out under Building Regulations is required and used by solicitors on their enquiry forms. Failure to demonstrate compliant work could adversely affect the sale of your property.

More information on the Building Regulations process can be found on the Communities and Local Government website www.labc.uk.com

INSTALLATION REGULATIONS

You must ensure that your boiler stove is installed by a recognised competent person who is appropriately qualified in the installation of boiler stoves and that the installation complies with all local, national and European building regulations.

In the UK we strongly recommend using a Hetas or OFTEC registered installer (see above) and in Ireland a registered installer from INFO – the Irish Nationwide Fireplace Organisation (www.fireplace.ie).

The installer should refer to the current issue of British Standard BS 8303, Code of Practice for installation of domestic heating burning solid fuel, the current issues of British Standards BS EN 15287-1:2007 design, installation and commissioning of chimneys (www.hetas.co.uk/professionals/standards), as well as Building Regulations, Local Authority Byelaws and other specifications/regulations as they affect the installation of the appliance.

For further information please consult:

England & Wales

Building Regulations Document J (revised October 2010) – Combustion Appliances and Fuel Storage Systems www.planningportal.gov.uk

Scotland

Building Standards (2004) technical handbook 2022: Domestic. www.gov.scot/publications

Northern Ireland

Building Regulations (Northern Ireland) Technical Booklet L (2012) Combustion Appliances www.buildingcontrol-ni.com

Isle of Man

Building Regulations 2007 and 2014 – Isle of Man www.gov.im

Republic of Ireland

Approved Document J (2015) – Heat Producing Appliances. www.environ.ie

Other Information Points

Soliftec For additional useful information and links to the government websites above, including informative downloads, visit www.soliftec.com.

The Solid Fuel Association website is also a very good source of practical information and downloads www.solidfuel.co.uk.

Ready To Burn Scheme has useful information about choosing the right wood fuel from the right supplier and how best to burn it www.readytoburn.org

The British Flue and Chimney Manufacturers

Association website www.bfcma.co.uk, produces a number of authoritative and informative download guides to flues and chimneys for solid fuel stoves.

The Stove Industry Association have much useful advice, including top tip videos about stove ownership www.stoveindustryalliance.com

UK SMOKE CONTROL AREAS

The Clean Air Act 1993 and Smoke Control Areas

Under the Clean Air Act local authorities may declare the whole or part of the district of the Authority to be a Smoke Control Area. It is an offence to burn an 'unauthorised fuel' (ie non-smokeless fuel) in a Smoke Control Area. It is a legal requirement that fuels burnt or obtained for use in Smoke Control Areas have been 'authorised' and officially designated 'Smokeless Fuels'.

Further information on the requirements of the Clean Air Act can be found here: www.smokecontrol.defra.gov.uk.

Your local authority is responsible for implementing the Clean Air Act 1993 including designation and supervision of Smoke Control Areas and you can contact them for details of Clean Air Act requirements.

Even if you don't live in a Smoke Control Area it is still the householder's legal responsibility not to cause nuisance smoke. Your boiler stove therefore should, at all times, be operated in accordance with these instructions which have been written to help you minimise the amount of smoke produced from your stove.

ASSEMBLING THE STOVE

Your new Aidan Eco Boiler stove is extremely heavy. Always handle it with care and make sure that you have adequate handling facilities and additional strong help whenever you move it.

The door and door handle, should never be used to grip the stove as they could be damaged from supporting the stove's weight. Items, such as the lid, firegrate and baffle plate can all be easily removed to help reduce the weight if necessary. Under no circumstances should the doors be removed as this will invalidate your Hi-Flame Warranty.


Always lift the stove to finally position it. Alternatively it may be possible to place the stove on thick carpeting to slide the stove into position. Be careful not to damage any finished floor or decorative hearth surfaces with trapped grit or building debris.

- **Unpack** Remove the stove from its recyclable packaging. You must retain this until the stove is installed and is fully operational. Remember to keep the bar coded serial number label. Unfasten retaining wires and remove any components, including those inside the ash pan, from inside the stove.


- **Inspect** Check the stove has not been damaged in transit – never attempt to install a stove which has been damaged. If damage is suspected then report this immediately to your stove dealer.

- **Check List** Study the *Packing List* on page 9 and make sure that you have received all of the components listed before proceeding. Some components are contained within the ash pan or will already be fitted to the stove.

- **Baffle Plate** Check the position of the baffle plate (sometimes known as the throat plate) inside the 'roof' of the stove to ensure that it has not moved during transit. This is a heavy metal plate which directs flames and helps retain heat inside the stove to warm the water. It is best to fully familiarise yourself with the baffle plate's correct location by practising removing it and re-fitting it prior to the stove's installation as you will need to regularly check the top of this plate and the access to the flueway to avoid potential soot build-up and blockages. Once you know how to do this it is a very easy operation – see page 14.

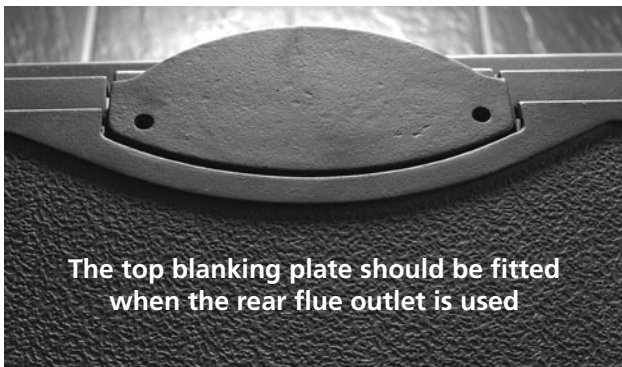

- **Flue Outlet** The Aidan Eco Boiler stove comes configured for a top flue outlet but also has a rear flue option. A shaped top flue collar is provided and there is a blanking plate for use on the top when using the rear flue. The connecting flue pipe size is 150mm (6") and should never be reduced.

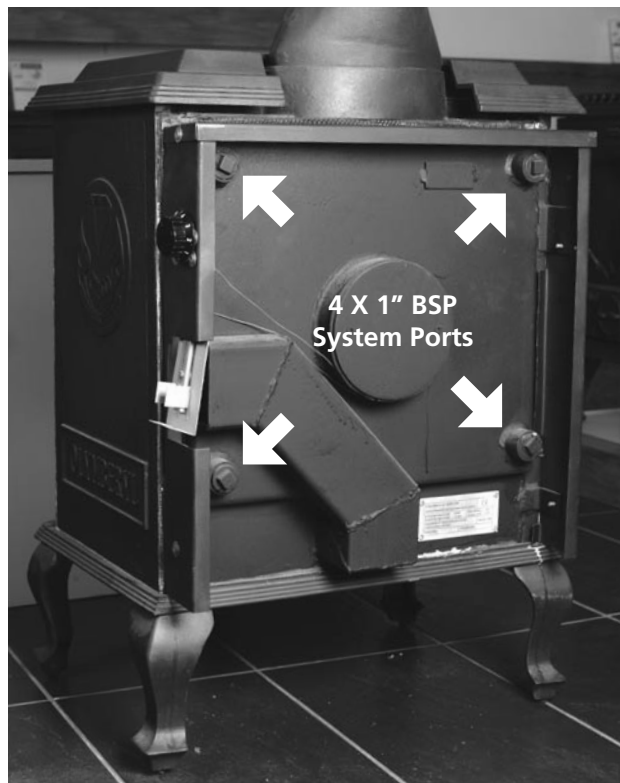

- **System ports** Each of the four water ports on the rear of your boiler stove (photo top right) has been fitted with a bolt seal to avoid the internal threads being contaminated with grit and other debris during installation. Please ensure that these are only removed when the system pipework is ready to be connected. You must use diagonally opposite tappings when using a two port system – cold feed at the bottom.

- **Attaching the Legs** The Aidan Eco Boiler legs need to be bolted to the base. See the instructions on page 13 overleaf on how to safely lower the stove on to its back so that these can be attached. In order to keep the leg bolt holes clear of dirt and paint blanking nuts have been used and these need to be removed and the bolt holes lightly oiled. Use the correct sized socket or spanner and do not over-tighten. Ensure all four legs 'line up' with the bodywork. Each leg has a level adjuster for uneven hearth surfaces.


- **Handle Assembly** Thread the split washer along the handle bolt. Feed the bolt and washer through the handle grip. Use a Phillips crosshead screwdriver to attach the assembled grip to the door handle clamp mechanism on the door, being careful not to over-tighten. The smallest of the two handle grips is fitted to the ash pan compartment door. Remember not to lift or position the stove using the doors or handles.

ATTACHING THE LEGS

The Aidan Eco Boiler stove is extremely heavy and therefore adequate facilities must be available for its safe loading, unloading and site handling. The method shown here is 'tried and tested' but will require two strong people who are familiar with handling very heavy weights to ensure that it is undertaken safely.


1

Remove the packaging and contents of the ash pan, as well as the lid, to help make the stove lighter

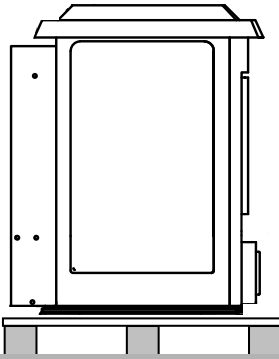


2

'Walk' the stove to the back of the pallet so that the cast iron base is on the edge and the rear vent panels are beyond the edge as shown

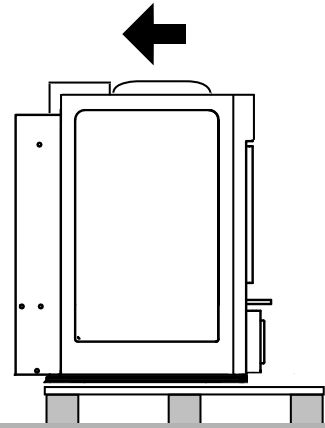


3

Place a strong wooden support block (A) to line up with the rear flue outlet. Then, using help, pivot the stove backwards, gently lowering the stove on to the block. Ensure it doesn't snag the rear vent panels.

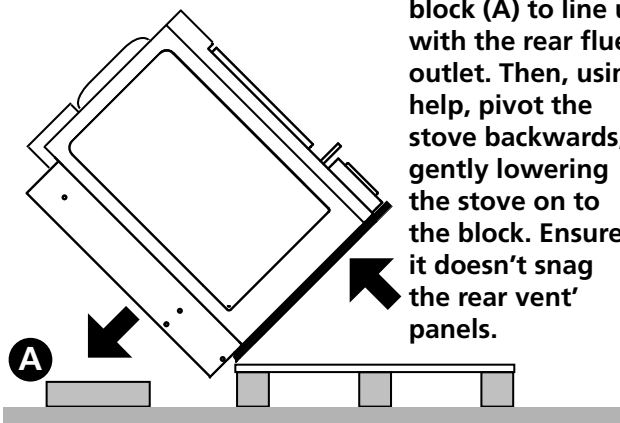


4

The stove should now be carefully balanced on the support block. Remove the pallet to access the lower leg sockets. In the interests of safety, do not place your hands or feet under the stove body.

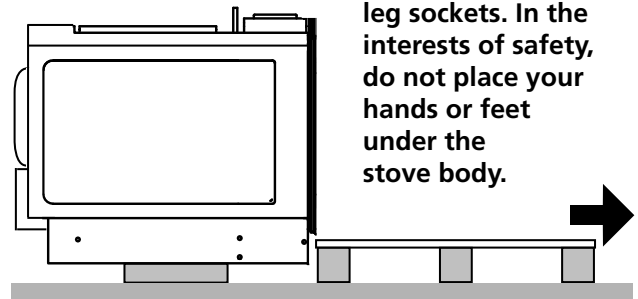


5

Remove the protective bolts from each of the leg holes in the stove. Fit each of the four legs ensuring they line up with the stove body. Use machine oil to lubricate the bolt holes. Do not over-tighten the bolts.

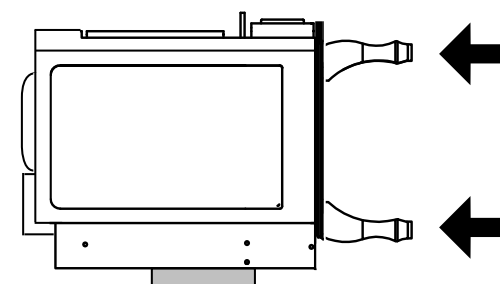

6

When all four legs are bolted in place tilt the stove forward evenly on the two rear legs. Ensure that the stove does not fall forward on to the front legs when moving into the upright position. Keep your feet clear at all times.

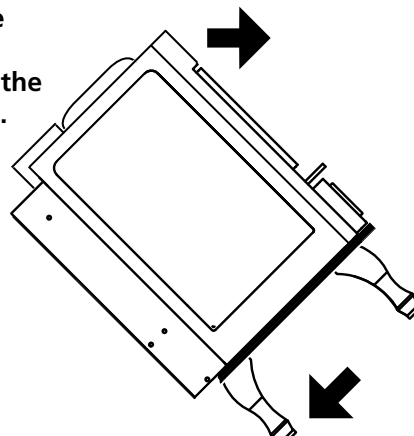

REMOVING THE BAFFLE PLATE

Regular checking of the baffle plate will ensure that the stove's flueway stays clear of soot as well as help maintain the stove's safe and efficient operation. If you have never owned a stove before it is important to understand how critical this aspect of operating a stove is, particularly on a boiler stove. It is easier to fully familiarise yourself with this procedure before the stove is installed.



With the Aidan Eco Boiler Stove there are no baffle fixing brackets, bolts or firebricks to remove.

Firstly, if undertaking this after the stove has been operated then please take care to protect any decorative finishes such as porous stonework, tile grout or carpets and other flooring as there will inevitably be some sooty debris removed with the baffle.



See instructions opposite (bottom right) for stoves with the optional vermiculite firechamber lining.

When the stove and boiler are cold, remove the fire fence at the front of the firechamber then simply put your hand up inside the lower part of the 'roof' of the firechamber – you'll see the baffle plate lug. Please note that the baffle plate is very heavy. Push the baffle upwards to one side so that you can drop the plate down and move it out of the way to clear the lower retaining ledge. Should there be excessive soot debris then you will need to review how you operate your stove and also check the quality of your fuel.

The Aidan Eco Boiler's wide body means that you should not rely solely on being able to clear excessive soot from the whole of the flueway and boiler top by just removing the baffle plate or through any stove pipe hatch door. You can also access this area by

quickly removing the heat sink (see section overleaf on page 15) to fully ensure that there is no soot build-up in areas which you otherwise cannot reach.

To replace the baffle, simply reverse the operation – ensuring that it sits securely and evenly along the retaining ledge and on top of the wrap-around boiler so that there are no air gaps. The baffle lug should always be pointing downwards into the firechamber.

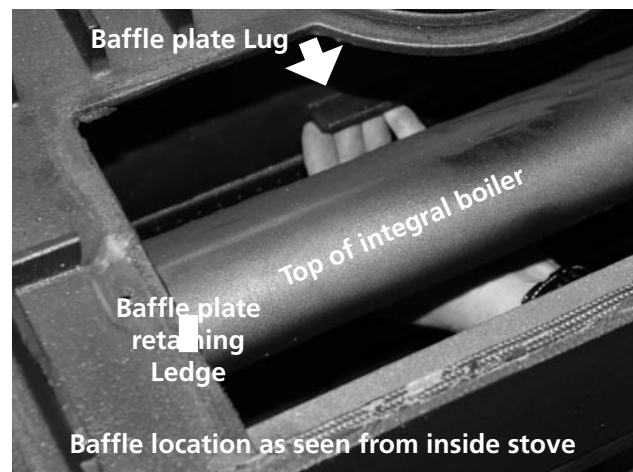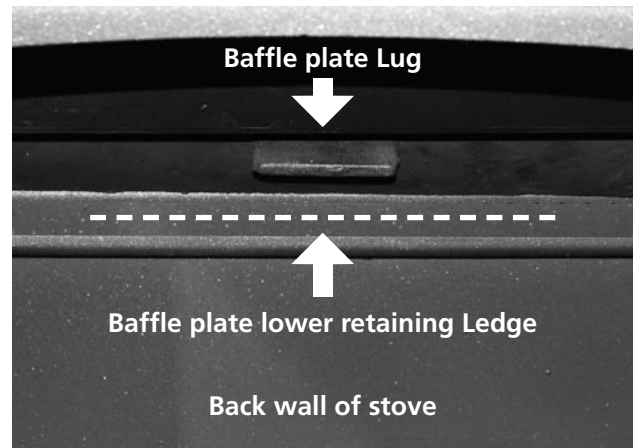

STOVES WITH VERMICULITE PANELS



The vermiculite baffle and firebrick firechamber lining ensures improved emissions and performance from your Aidan Eco Boiler. To access the vermiculite baffle for routine cleaning, first remove the fire fence and then remove the vermiculite firechamber base. This will then allow you to remove both of the side panels and to drop down the vermiculite baffle plate. There are no fixing brackets, however you may need to carefully ease the panels away from the sides and base.



ACCESSING THE FLUEWAY


The Aidan Eco Boiler allows you to sweep the flue system through the stove without the need to disconnect the flue pipe. An easy-to-remove heat sink on top of the firechamber provides complete access to the top of the boiler as well as the top and rear flueway.

Simply remove the stove lid by sliding it forward and then lifting it upwards. With the correct sized socket or spanner carefully remove the four bolts which secure the heat sink to the top of firechamber taking care not to damage the rope seal gasket. The heat sink should easily lift free – do not attempt to lever it clear as this could put undue pressure on the casting,

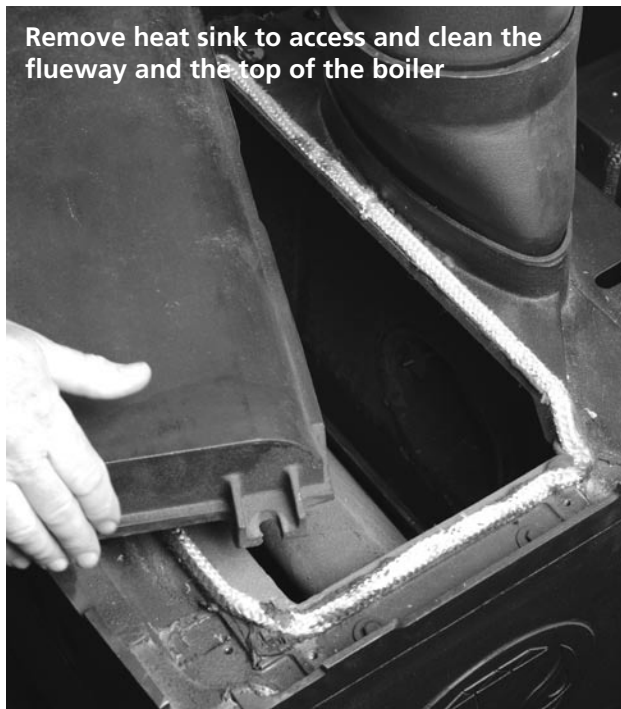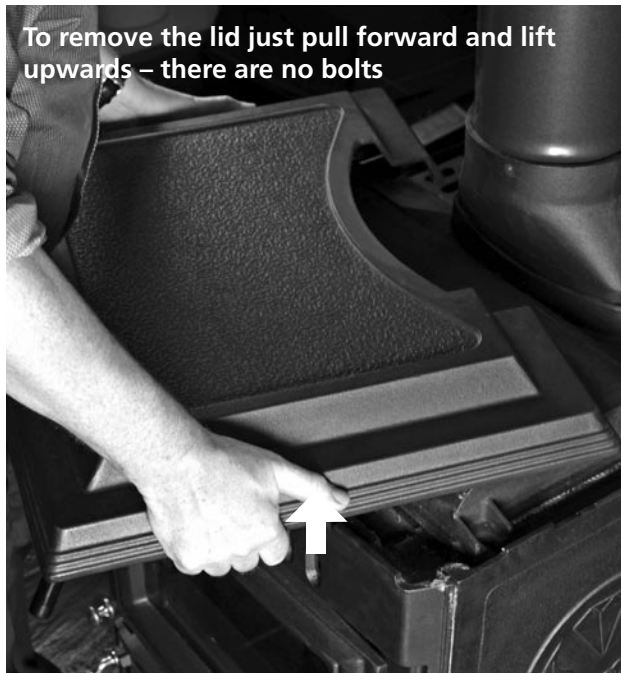

potentially causing it to crack.

Clean the boiler and flueway using a lightweight wire brush if necessary. Check the access plate gasket is in good condition and replace if necessary. Reverse the procedure to refit the heat sink ensuring the gasket still makes a good airtight seal. Lightly oil the bolts and do not over-tighten the bolts. Refit the stove lid.

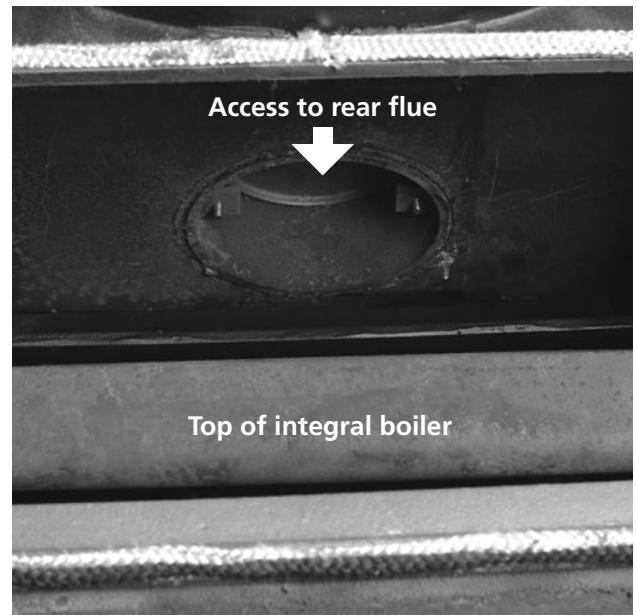

PREFERRED FUEL

Use dried, fully seasoned chopped wood logs with a moisture content of less than 20%.

Wood which is well seasoned makes a distinctive 'clack' rather than a dull 'thud' when knocked together. It will also feel much lighter than an equivalent unseasoned 'green' log. Other indicators of a well seasoned log include bark peeling away and cracking and splitting around the outside.

Ideally wood should be seasoned outdoors for between 18 to 24 months – the harder the wood type then the longer the seasoning. It should be stacked off the ground with plenty of space between the logs to allow air movement and with the top covered to keep rain and snow out. Research has shown that seasoned wood will provide approximately 50% more heat output than the equivalent unseasoned log.

Most types of hardwood, for instance Ash (generally regarded as the best), Birch, Beech, Oak and Elm can be used. However, avoid woods with a high resin content. As a rule of thumb, the heavier the type of wood, then the greater the heat output and the longer burn time – the time between refills. All of this is providing that it is fully seasoned wood.

Never use wet or unseasoned wood as this will cause excessive nuisance smoke and produce a very disappointing fire.

Burning unseasoned wood could also quickly result in the build-up of soot and creosote which can eventually clog your flue system and cowl – in a matter of weeks sometimes, and because of the higher temperatures of stove flue gases, this could potentially cause a dangerous flue or chimney fire. In addition, burning wet wood creates other environmental problems, a less efficient fuel economy and will also reduce the effectiveness of the stove's airwash system thus causing staining and blackening of the glass.

Wet or unseasoned wood produces the following poor performance:

- Hard to light fires
- Fires that are difficult to keep going or to keep burning well
- Smoky fires with fewer flames which are also of a dull orange colour
- Increased dense grey / blue smoke from the chimney
- Shorter burn times
- Low heat output
- Dirty glass and, where fitted, blackened firebricks
- Excessive and rapid creosote build-up in the flue system and chimney
- Unpleasant smoky smells both inside and sometimes outside the house

In the event of a problem with your stove – always check your choice of fuel first!

Manufactured or finished wood products, such as plywood and chipboard, must be strictly avoided because of the high chemical adhesive content used in their production which will also leave harmful, potentially corrosive, residue inside the stove and flue system.

For more information about wood burning and buying seasoned wood please visit the *Ready to Burn* scheme (supported by Defra) www.readytoburn.org.

FUELS YOU SHOULD AVOID

Never use your stove like an incinerator. Burning prohibited 'fuels' could potentially damage your stove as well as create health and air quality issues. Burning the following materials could render any product warranties void on the stove and flue system components, such as the flue liner for example.

- **Petroleum Coke** Never burn petroleum coke as this burns at a very high temperature and its continued use will almost certainly cause irreparable damage to components such as the firegrate and carrier frame, baffle plate and fire fence.

- **Bituminous House Coal (smoky coal)** is not recommended and has rightly been banned in England, Wales and the Republic of Ireland. This is because it produces excessive smoke and soot deposits, which are not good for the environment. Its use will also considerably increase the need for frequent cleaning of the stove and flue system.

- **Household Rubbish** Printed matter (excluding perhaps very small amounts of newspaper for starting the fire), plastic, rubber, lacquered or impregnated wood, plywood, chipboard and household rubbish, such as milk cartons, should also be avoided. During combustion some of these materials may develop substances which could be hazardous to your health and be harmful to the environment.

- **Flammable Liquids** Never use methylated spirits, petrol or other highly inflammable liquids for lighting the fire as these could cause a flash flame or explosion in the confined spaces of the fire chamber.

USING THE ASH PAN AND TOOL

Insert the forked end of the tool underneath the ash pan grip (below) to create the ash pan handle. For safety only empty the pan contents when they are cold.



HOW TO BURN WOOD EFFICIENTLY IN THE AIDAN ECO BOILER STOVE

Burning wood fuel is much more effective when its combustion air is taken from above the grate. This source of air is known as Secondary Air. Wood also always burns best on a deep bed of its own embers (approx 1" / 25mm). The ashes shouldn't need to be riddled until they become potentially problematic or begin to spill from the firebed. You should never let the ash pan fill up as this can overheat the underneath of the firegrate and shorten its lifespan.

Your new stove can burn very well, or very poorly, depending on how you light the fire, how you refuel the fire, and, of course, the type and quality of the fuel that you are burning. A log moisture meter is a cost-effective investment if you want to maximise the efficiency of your stove and wood fuel.

When loading a burning stove always open the stove door gently to equalise the room and fire chamber air pressures. This will help avoid unnecessary air turbulence which could cause fly ash or small lighted embers to be drawn from the fire chamber and potentially beyond the protective hearth.

Always use heat-resistant gloves or tongs to place the logs precisely where you want them in the fire chamber. Never throw them into the fire chamber.

The stove is *not* designed to be operated with the door left open continuously – this is unsafe and will also reduce its operating efficiency so that it will consume more fuel very quickly and produce less heat.

It is unsafe to operate this stove with the door open. The only exceptions to this are at the lighting phase when it can be left slightly ajar for the first few minutes to provide a boost of combustion air for a quicker start and only ever when the stove is attended or when refuelling, when this should be kept to a minimum.

CONTROLLING THE COMBUSTION AIR

Your Aidan Eco Boiler stove has three simple-to-use air controls:

1 Primary Air Boost Control This is the large control knob in the centre at the base of the stove front. Primary Air is required for quicker lighting wood fires to boost the air supply during the initial combustion stage. It can also be used as the Primary Air source to control the combustion of approved smokeless coal. Using the tool provided, turn it anti-clockwise to open and increase combustion air.


2 Secondary Air Control This is the sprung slider control in the middle of the grille above the door. Move it to the right for the maximum supply of air and to the left to limit this supply. Secondary Air is needed when burning wood and is not usually

needed when burning smokeless coal (unless it is to maximise the air supply to aid the initial combustion).

3 Thermostat Control Zero is closed and 8 fully open. This adjusts the temperature of the water leaving the boiler from low when closed off (approx 50°C) to high (approx 90°C) by controlling part of the combustion air supply to the fire chamber.

The effectiveness of adjustment will involve the interaction of the Primary and Secondary Air supply and other factors such as the fuel type, the system set-up and the pump flow speed. Finding the right setting(s) will be a matter of trial and error as well as personal preference. For example the Thermostat Control, can sometimes be used for simultaneous control of both the water temperature and the burn rate of a fuel load by shutting off both the Secondary Air and the Primary Air.

It is worth noting that this control does not 'turn off' the hot water production completely and that your system design must therefore include a means to dissipate any surplus heat – see pages 25 – 27.

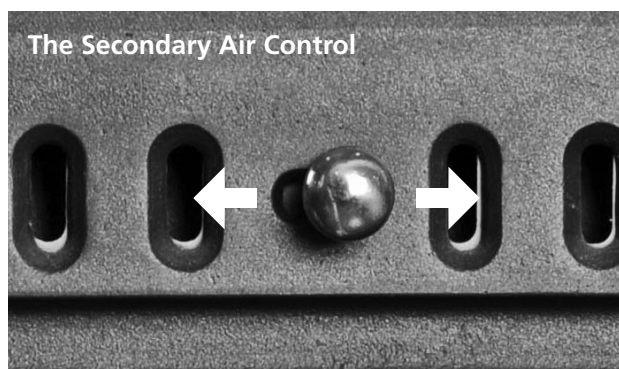

FUEL LOAD WEIGHT AND LOG SIZE

These instructions are an initial guideline to help you get started. As you begin to gain experience of your stove and choice of fuel(s), as well as your flue system, you will be able to adjust these procedures and control settings to your personal preference.

As previously stated wood burns best on a bed of its own embers which also forms a barrier to reflect heat and protect the firegrate from being damaged. You can therefore leave a bed of ash in place on the firegrate to create a layer of approximately 25mm (1"), only occasionally removing the surplus ash from the grate. Ash should still be regularly removed from the ash pan – never let the ash pan get over-filled. Once you have lived with your stove for a while you'll soon get to know how often you should empty this.

Ensure that there is a gap of approximately 25mm (1") between both ends of the logs and the fire chamber sides. Log ends placed against the boiler sides restrict combustion and can create unwanted cold spots in both the log and the water as well as damage any vermiculite firebricks when fitted.

As the end grain of the wood produces more of the remaining moisture and gases, whenever possible point the log ends away from the glass to help keep the glass clean.


Fuel Load Ideally the logs should be approximately 325mm (13") long. A typical fuel load should weigh approximately 4kg (8lb 12oz).

To make your stove easier to light and operate, ideally you will need three different thicknesses of wood as you build the fire through each lighting phase:

1 Kindling This is generally finely chopped wood, approximately 5 to 10mm thick (1/4" to 1/2") from your supply of logs. Alternatively use dried twigs or small branches which have also been fully seasoned

2 Lighting Logs These are slightly bigger diameter logs, approximately 25 to 50mm (1" to 2")

3 Refuelling Logs These should be approximately 75 to 100mm thick (3" to 4"). Bigger logs should be split down to this size

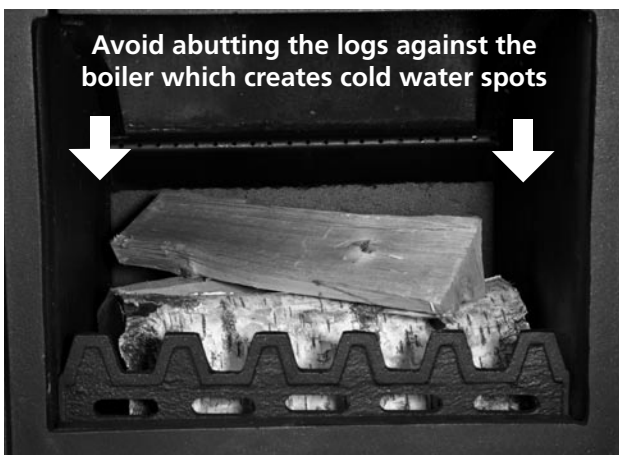

LIGHTING A WOOD FIRE

The main difference between smoke and flame is temperature, so when lighting a fire you need to get the temperature in the fire chamber as high as possible as quickly as possible. This is also critical in creating a good 'draw' within the flue system, especially when it is particularly cold outside.

When flue gas temperatures are below 120°C, creosote tars form within the gases and the fire will be smoky and burn with a dull orange flame. Burning the stove like this for a sustained period will create unnecessary smoke and not be good for the chimney or flue system.

1 The Lighting Phase

For best results:

Primary Air Boost (bottom control) – fully open

Secondary Air (top control) – fully open

Thermostat Control – fully open (8)

Door – slightly ajar (optional)

Avoid trying to light the fire with excessive amounts of paper as this has a very high ash content which can 'smother' the ash bed. If you have good dry kindling or sticks then paper should not be needed at all.

The size of the logs used at each stage is also important. If the kindling wood is too large this will not light well and will be slow to get started. Two handfuls of smaller pieces of kindling (equivalent to the weight of typical log) layered criss-cross or 'wig-wam' style and a small firelighter will get the fire well established and up to operating temperature quickly.

If you feel you have a weak chimney draught, then keeping the stove door slightly ajar for the first 5 – 10 minutes will assist, after which it should be closed.

This will also help prevent the build-up of condensation on the door glass until the glass warms up, especially if you have not used the stove for a few days. During the lighting phase the Primary and Secondary Air settings, as well as the Thermostat Control, on the stove should be fully open.

2 The First Refuel Phase

For best results: After 10 minutes...

Primary Air Boost (bottom control) – close completely

Secondary Air (top control) – fully open

Thermostat Control – fully open (8)

Door – closed

Once the embers are starting to glow and the flames start to calm down, the first refuelling can take place.

For this stage use slightly larger pieces of wood than the lighting wood – but smaller than the main refuelling wood in the next phase. The reason for this is that the embers from the kindling wood are small and will not hold a high temperature for too long.

If unnecessarily large pieces of wood are placed on the embers at this stage and do not ignite well there is a risk that the firebox will quickly cool down and the

wood start to smoke. When the first refuelling wood is burning well (say, after about 10 minutes from the start) the Primary Air Boost can be completely shut off.

3 The Main Firing Phase

For best results: After 17 or 18 minutes...

Secondary Air (top control) – remains open

Primary Air Boost (bottom control) – remains closed

Thermostat Control – remains fully open (8)

Door – remains closed

Once the embers of the first refuel phase are glowing then these can be evenly spread with a poker or companion tool and the main larger refuelling wood can be quickly set.

Wood burns best if the flames have other wood to 'play off'. For example a single dense piece of wood or log will not burn as well as 2 or 3 smaller logs of equivalent mass. The more contact the wood has with each other piece, the hotter the embers will be. 3 or 4 logs tightly packed to each other will burn longer but at a lower temperature than loosely criss-crossed logs.

Approximately 1.5kg to 2.5kg of wood logs can be added at this stage. Be careful not to add too many logs as they may 'smother' the fire or cause the stove to over-fire.

Try to avoid setting the ends of the logs pointing towards the glass as this is where some of the gases and moisture from the logs escapes and this can cause staining which the Airwash may find difficult to remove.

Only reduce the Secondary Air control when the wood has 'carbonised' and the fire is burning at a high temperature. This is when the ash on the burning wood looks light grey and virtually covers all of the wood. You will be able to tell when the stove is at this stage by studying the colour of the burning surfaces – the 'lighter' they are the better the wood is burning. If the log surface is predominately black and / or the flames are a dull orange then there is still some time to go before the fire is operating at full temperature.

Avoid leaving the stove unattended after refuelling until the flames are well established on the new logs. Always load onto a bed of hot embers.

Once the fire is established the flame pattern can then be adjusted to your requirements with the top Secondary Air (Airwash) control. Getting the balance right between a gently burning stove and one that is burning too slowly, creating smoke and causing the Airwash to fail and consequently the glass to stain, is very much a matter of trial and error. If you are burning well-seasoned wood then a quick 'blast' of the stove operating at 'full throttle', with Secondary and Primary Air Boost fully open, should quickly burn off any deposits left from any slower burning phase.

If you are lighting the stove to firstly provide hot water and heat into your central heating, rather than heat into the room, you should not need to adjust the

Secondary Air or Thermostat Control until you are satisfied that both of these have been achieved. This could take as long as two hours and will probably require at least one full refuel.

4 Refuelling

For best results: Just before you refuel...

Primary Air Boost (bottom control) – fully open

Secondary Air (top control) – fully open

Thermostat Control – fully open (8)

After loading and when new fuel is burning well...

Primary Air Boost – close completely

Secondary Air – adjust to suit

Thermostat Control – adjust to suit (0 – 8)

Regular, smaller loads are better because they keep the fire chamber at a higher temperature, without over-firing it. The higher operating temperature helps prevent nuisance smoke and sooty deposits.

Never overfill the fire chamber and also avoid over-sized pieces of wood which will 'slow' the fire down at the start but then could lead to over-firing.

Before refuelling open the Primary and Secondary Air supply, as well as the Thermostat Control, so that there is a good strong fire and the embers are glowing red to help the new fuel to start burning quickly. This will also ensure that there is no build-up of harmful gas which could be released into the room when the fire chamber door is opened.

Rake the embers and spread them out to make an even bed. You may need to add some kindling to re-establish the fire. Add the new wood as before ensuring that the logs are not tightly packed.

Newly refuelled wood always requires some additional air so make sure the Secondary Air and the Thermostat Control are back in the fully open position after refuelling. Do not adjust the Secondary Air or Thermostat Control until the fire is burning well and you can see bright yellow vigorous flames.

Once the fire is established, usually after about five minutes, close the Primary Air Boost and adjust the flame pattern again to your requirements with the Secondary Air and Thermostat Controls.

If the new wood fuel is slow to catch alight, even with the Primary, Secondary and Thermostat Air fully open then try opening the stove door slightly to provide additional combustion air and until strong vibrant flames are established. This should only take a matter of a minute or so and on no account should the stove be left unattended while this is happening as the stove could very easily over-fire.

5 Controlling the boiler temperature

This will be very much a matter of trial and error using the guidelines above. When the stove has been running at operating temperature for a number of hours the Thermostat Control, can be used for simultaneous control of both the water temperature

and the burn rate of the fuel load (and therefore the heat into the room). To do this, ensure the Primary Air Boost is fully closed, adjust the Secondary Air so that some combustion air is still provided to ensure the Airwash will continue to work. Then simply control the flame pattern and burn rate with the Thermostat Control. If the glass begins to soot up provide more Secondary Air.

SOME SIMPLE WOOD BURNING TIPS

1 Boiler stoves operate at a much lower temperature than non-boiler stoves and consequently the potential to create soot or creosote build-up in the flue system is also much greater, especially when operating the stove in 'slumber' mode during overnight burning. We therefore recommend burning your Aidan Eco Boiler on high output for at least 30 minutes each day to help burn off any potential soot or creosote build-up – but be careful not to over-fire the stove.

2 Small regular loads when refuelling will produce a more efficient and cleaner burning performance.

3 Avoid burning large amounts of wood with the Secondary Air supply turned down as this will reduce the effectiveness of the Airwash system, as well as produce excessive smoke and create potential creosote build-up.

4 Never overload the stove – it will be smoky and inefficient as well as very slow to establish a good burn and could eventually possibly over-fire.

5 Bright vibrant flames and a clean fire chamber indicates that your stove is operating well.

REMOVING ASH

Remember, you do not need to riddle wood ash during firing, but possibly only at the start when some Primary Air Boost is needed to aid the initial combustion.

Riddling allows smokeless coal ash to fall into the collection pan below the firebed to help maintain a flow of Primary air to the fuel. The ash pan should never be allowed to over-fill as this will limit the Primary Air flow and could cause excessive heat build-up which could eventually warp or burn out the grate.

Locate the operating tool in the slot at the front of the ash pan to make a handle and lift the pan from the stove. For safety reasons ash should be removed when the stove is cold. Decorative and combustible surfaces, such as laminate floors or carpets, should be protected against potential accidental spillage. Even if the ash appears to be cold protective gloves should be worn and the refuse ash placed in a non-combustible container. The ash could still be hot with the possibility of hidden live embers

As you remove the ash from your home ensure that it is covered to protect it from any draught or wind which could blow the ash out of your container.

Wood ash can be composted or used in the garden.

HOW TO BURN APPROVED SMOKELESS COAL

As you begin to gain experience of your stove and choice of fuel(s), as well as how your flue system works, you will be able to adjust the procedures and control settings below to your personal preference.

Approved smokeless coals require much more combustion air from below the fuel load than wood.

This means that the Primary Air Boost is generally needed throughout the initial burning phases. The Primary Air Boost should always be in the fully open position at the start of the lighting phase (you may also need to leave the stove door open slightly).

Burning smokeless coal also requires the grate to be riddled to allow the free flow of combustion air from the Primary Air source – therefore, always ensure that the firegrate is clear.

Do not burn smokeless coal when the fire-chamber has been lined with vermiculite as the solid vermiculite base will restrict the flow of essential Primary Air and prevent ash riddling.

Recommended Smokeless Coal Fuel Load

The recommended smokeless coal fuel load for the Aidan Eco Boiler is approximately 4kg (8lb 12oz) up to a maximum 8kg (17lb 6oz). A typical refuel load would be approximately 2.8kg (6lb 1oz).

1 The Lighting Phase

For best results:

Primary Air Boost (bottom control) – fully open

Secondary Air (top control) – fully open

Thermostat Control – fully open (8)

Door – slightly ajar (optional)

Light your fire in the traditional way with a small wood kindling fire and small amounts of your choice of smokeless coal placed lightly on top making sure to leave plenty of air space. On very cold days increase the amount of kindling used to ensure that a good up-draught in your flue system is quickly established.

2 The First Refuel Phase

For best results: After 10 – 15 minutes...

Primary Air Boost (bottom control) – fully open

Secondary Air (top control) – adjust to suit

Thermostat Control – fully open (8)

Door – closed

Once the smokeless coal is burning well then add some additional fuel (but not too much so that it 'kills' the coal that's already alight), until there is a good bed of burning fuel. Avoid stacking too much fuel against the back and sides of the boiler as this could potentially overheat the stove's components and cause permanent damage. Ideally, when fully burning the fuel load should look like a shallow dome.

When burning good quality smokeless coal the Secondary Air (Airwash) should not be needed to keep

the glass clean, therefore the Secondary Air can be reduced or shut off completely. The Primary Air Boost should then be used to adjust the flame pattern in the early stages. You may find that a combination of subtle adjustments to both air controls may best suit your individual requirements. Leave the Thermostat Control fully open until the heating and hot water system is at the desired temperature – this is usually after a couple of hours and depends on the system requirements.

3 Refuelling

For best results: Just before you refuel...

Primary Air Boost (bottom control) – fully open

Secondary Air (top control) – fully open

Thermostat Control – fully open (8)

After loading and when new fuel is burning well...

Primary Air Boost – adjusted to suit

Secondary Air – fully close or adjust to suit

Thermostat Control – adjust to suit (0 – 8)

When refuelling it is better to use smaller fuel loads more often for a cleaner, more efficient burn. Spread the embers with a poker just before adding the new fuel and immediately after refuelling, open the Primary Air to maximise the combustion air delivered to the remaining fuel. This helps to quickly establish the fire without the fuel 'killing' it. Re-adjust the air settings once all the fuel is burning normally.

Be sure to empty the ash pan regularly – at least once a day and do not let the ash build up under the grate as this will create a strong hot spot which could eventually warp or burn-out your grate. Ash build-up will also limit the flow of Primary Air and could affect the stove's performance.

4 Controlling the boiler temperature

When the stove has been running at operating temperature for a number of hours the Thermostat Control, can be used for simultaneous control of both the water temperature and the burn rate of the fuel load (and therefore the heat into the room). To do this, ensure the Primary and Secondary Air are fully closed. Then simply control the flame pattern and burn rate with the Thermostat Control. However, you may still need to undertake some subtle adjustments to both the Primary and Secondary Air supply to achieve the correct balance of combustion air for your stove and flue system draught.



Use the tool to move the riddler knob

EXTENDED BURNING

The Aidan Eco Boiler stove is designed to allow extended burning. To do this put a good fuel load into the stove and allow it to burn for about 20 minutes in the normal way. If burning wood, then limit the Secondary Air supply and ensure the Primary Air Boost is closed. Adjust both the Thermostat Control and Secondary Air to achieve a slower burn rate. If the glass begins to soot up then add some more Secondary Air (Airwash).

Do not 'starve' the fuel of combustion air as this could create a very inefficient smoky burn and cause heavy soot and creosote build-up in the flueway and flue system. The best setting to achieve the best burn and cleanest glass will be a matter of experimentation.

For smokeless coal close the Secondary Air supply and adjust the Primary Air Boost and Thermostat Air supply to achieve a slower burn rate. When you return to your stove to refuel, check if the ash pan needs emptying. Opening the ash pan compartment will greatly increase the supply of combustion air and possibly re-ignite any live embers. Next, fully open all three air supply controls. If the firebed shows that it still has sufficient burning embers then simply add a small fuel load as if lighting the fire from the start (see above) and add more fuel until you have a good fire.

If you have been burning smokeless coal you will probably need to riddle the firegrate to re-establish the Primary Air flow. Do not add a full fuel load until the firebed is hot and any initial small fuel load has been allowed to fully ignite. A large 'cold' fuel load could easily starve the embers of combustion air and put out the fire.

After extended burning, always operate the stove on full burn for approximately 30 minutes to clear away any soot deposited in the flue system which has built up during the extended burn session. Afterwards you can then revert to your preferred operating levels.

During extended burning the stove glass may blacken but if dry wood fuel has been used and a hot fire is re-established then these deposits should quickly burn off. However, if there are no burning embers and you need to start the fire again, simply wipe any deposits from the glass using kitchen roll or newspaper. Do not use a damp cloth or proprietary cleaning fluids unless you are sure that the stove glass is cold. Dipping the dry kitchen roll or newspaper in the cold ash makes a very effective 'scrubber'.

INSTALLATION CHECK-LIST

This information is intended to outline the general principles of installing your boiler stove. However, as each installation will vary and must comply with local, national and European building regulations, which could be different from country to country, it is unfortunately not possible, nor is it intended, for these guidelines to be comprehensive.

Legal Requirements

Please note that, not only is it a legal requirement to ensure that your stove installation complies with all applicable building regulations. It is also a requirement of your Hi-Flame Warranty that the stove has been installed by a competent person such as a Hetas, OFTEC or INFO registered installer who will be fully aware of any building and safety regulations which apply to stove installations in your location.

Boiler Stove Location Checklist

- The existing constructional hearth (the main part of the hearth) must be suitably constructed and be of a thickness that conforms to all applicable building regulations.
- The back hearth (the part of the hearth that the boiler stove sits upon and which is usually within the fireplace recess or opening) must also suitably constructed and conform to all applicable building regulations.
- The superimposed hearth (the thinner, usually decorative surface, which sits on the constructional part of the hearth) must be suitably constructed and conform to all applicable building regulations.
- The fireplace recess or opening must be suitably constructed and conform to all applicable building regulations and must be able to safely accommodate the stove along with the safe minimum operating distances required.
- Any adjacent walls, next to which the stove is installed, must be of a suitable thickness and made from non-combustible material as well as conform to all applicable building regulations.
- Any extractor fan inside the room should be removed or permanently disabled.
- The Aidan Eco Boiler has been officially rated at a nominal output of 16.5kW. Whatever the age of the dwelling all stoves above 5kW output require a permanently open air supply within the room. Therefore the installation of the Aidan Eco Boiler must incorporate an air vent sized for a 16.5kW stove which must conform to the requirements of building regulations. For properties which have been built or modified so that their design air permeability is less than $5\text{m}^3/\text{h.m}^2$, a permanent ventilator for the full 16.5kW nominal heat output must be fitted. Building Regulations Approved Document J gives more detailed information.

- The chimney must be of sufficient height, suitably constructed and in good condition. It must conform to all applicable building regulations regarding stove installation. The minimum flue height required for the Aidan Eco Boiler is 4.5 metres (15') from the hearth to the top of the chimney terminal.
- Any existing chimney must be swept and tested prior to installation – even if a flue liner is being used.
- The proximity of all combustible materials to the intended stove installation must conform to the minimum requirements outlined within this handbook (see below and page 6) as well as local, national and European building regulations, whichever is the greater. A combustible material is anything which can burn once it gets hot enough and includes skirting boards, wooden fire surrounds, wooden mantles, wallpaper, fabrics and floor coverings. Importantly, this also includes plaster board.

Remember these materials could be concealed behind other materials which on the surface may appear to be non-combustible, for example, stud partitioned walls. It also worth noting that some designated heat-resistant materials could eventually catch fire should they inadvertently reach the required higher combustion temperatures.

Important Minimum Distances For This Stove

The minimum distances to combustible materials for the HFB-443 Aidan Eco Boiler are as follows:

Sides (eg fire surround)	125mm (5")
Rear	375mm (15")

We do not recommend the use of a combustible mantel (eg wood) above this stove.

In a traditional brick or stone built fireplace the recommended minimum safe operating distances at the sides of the stove are 150mm (6"), 75mm (3") at the rear and 300mm (12") above the stove.

APPLIANCE INSTALLATION: GENERAL GUIDELINES

Please refer specifically to current building regulations which apply to your country or region. Adopt whichever provides the highest / safest margin.

Asbestos

This stove does not contain Asbestos. However, check that there is no possibility of disturbing any asbestos-based materials during its installation. You may intend removing an older appliance prior to installing your new stove, and you should be aware that the old appliance or installation could incorporate heat protective asbestos sheet or other asbestos-based materials – if in doubt seek guidance at www.hse.gov.uk/asbestos – do not underestimate the potential health hazards of handling Asbestos.

Fire Cement

Always read the Fire Cement manufacturer's instructions first. Prolonged contact with fire cement and skin should be avoided. Protective gloves and glasses should be worn when applying fire cement.

Care should also be taken to avoid unnecessary contact between the stove's surfaces and the fire cement as this could damage the paintwork. Any excess fire cement should be quickly removed before it hardens.

The Hearth and 'Fireplace'

- The hearth should be made of solid non-combustible material, set on a firm and level base. It must be capable of supporting the weight of the stove (when loaded with fuel and water) along with any attached flexible flue liner which may bear down upon the stove. We estimate that this could be a minimum of approximately 244kg. The hearth must also conform to local building regulations which may vary from country to country.
- In England and Wales there is a minimum requirement for the hearth to project 500mm (20") in front of any brick or stone recess and 150mm (6") at each side of the recess. The hearth should extend by a minimum of 225mm (9") from the front of the stove (which includes the edge of the ash lip). As a general rule we recommend extending the hearth to at least 75mm (3") beyond the furthest out-swing of the stove door if possible to avoid any potential live ash held on the stove door falling on to combustible flooring or floor coverings. If the top of the hearth and any combustible floor coverings are level with each other then a retaining fender should be fitted to warn occupants of the hearth area. Alternatively, a 28mm (1.1") change in level provided by a decorative non-combustible material such as stone, marble, granite, ceramic tiles etc could be used.
- If using a fire surround it should be made of non-combustible materials as well as be suitable for use with a solid fuel stove. For example the hearth and

mantlepiece ideally should be 'slabbed' with concrete and any decorative surface finishes, such as marble, should be 'tiled' to allow for heat expansion. Some materials may not be suitable when used in a single sheet. This may prove problematic if, for example, the stove is being installed within an existing fire surround where the back panel has been removed to create a larger opening in the chimney breast. If a potentially combustible fire surround is being used then adherence to the 'distance to combustible materials' indicated on page 6 should be strictly observed. Your stove dealer or installer should be able to advise you about the suitability of an existing fire surround.

- The fireplace side and rear walls should be at least 75mm thick and made of non-combustible brick or stone.

Flue Draught

The Aidan Eco Boiler has been tested with a flue draught pressure of 12Pa and therefore to ensure performance which is in line with the test results on page 6 the ideal flue draught pressure should be approximately 12Pa. A lower flue pressure of 9Pa may be acceptable provided the performance of the stove, including potential spillage, has been successfully tested.

The Chimney, Flue and Flexible Liners

- Other flued appliances must not share or be connected to the same flue system or chimney as this boiler stove.
- Generally speaking, the chimney or flue terminal must be above the height of the apex of the building and any other obstructions, such as trees, which are within 3m (10') of the flue terminal. For the precise height (and position) it must conform to *England & Wales Building Regulations Document J* or national equivalents. Failure to follow regulations may cause down-draughts which could mean potentially dangerous flue gases being emitted into the room.

If you are using an existing chimney and it has been checked for condition and suitability (see below), in the interests of safety you must ensure that it is swept before the stove is installed, even if it has never been used or you intend to use a flexible liner. To find a local registered sweep visit The National Association of Chimney Sweeps at www.chimneyworks.co.uk or the Guild of Master Chimney Sweeps at www.guildofmasterchimneysweeps.co.uk.

The recommended minimum height for the chimney / flue system from the top of the stove to the top of the chimney terminal is 4.5m (15'). If this is not possible then a 'spinner' type cowl, may be fitted to compensate for any potential limited updraught. Specialist advice must be sought on the correct type of cowl to use.

Under no circumstances should the stove's 150mm (6") diameter flue be reduced in any part of the flue system as this could cause a build-up of dangerous carbon monoxide (CO) gas.

Since stoves create flue gases at a much greater temperature than those produced by an open fire or gas appliance it does not necessarily follow that your chimney will function adequately (or safely) when your new stove is installed. The best way to ensure that you have a fully functioning flue system is to fit an approved flexible solid fuel flue liner. If you intend to predominantly burn smokeless coal or slumber burn then 904L grade liner should provide greater resistance to any acidic condensates associated with these.

When your new boiler stove is installed with a flexible flue liner it should be possible to sweep the chimney through the stove by simply removing the baffle plate inside the stove and the fire chamber access plate on top of the stove (see page 14). However, if you do not use a liner the installer should, if possible, provide an alternative means, such as a soot door with an adequate air-tight seal, in the chimney wall to be able to clean the whole of the chimney / flue system.

Flexible Stainless Steel Chimney Liners

Hi-Flame strongly recommend fitting a chimney liner for the following reasons:

- A flue liner is a major 'quantifiable' component in a total and fully functioning flue system. It will help provide a consistent flue draught from the stove through to the chimney terminal and when back-filled with vermiculite will deliver much needed insulation to keep flue gases as hot as possible which will help minimise the amount of smoke and soot produced. It will also improve the stove's operation with greater control over the fuel burn rate and efficiency.
- Your existing chimney could leak smoke, fumes and potentially dangerous 'invisible' carbon monoxide into other parts of the building.
- Condensation or creosote 'tar', often associated with burning wood, could eventually seep through the walls, particularly if they are made of old or porous brick and / or are jointed with lime mortar, eventually causing unsightly stains on decorative coverings.
- Stoves work best with sufficient draught. Pre-1965 chimneys which have been built for open fires have larger (and irregular shaped) voids than those best suited for a modern stove and thus could reduce the effectiveness of the flue draught by making the flue too cold and difficult to warm. This is a particular problem if the chimney breast is on an outside wall and is subject to a strong prevailing wind.
- The interior surfaces of older flues could be eroded and also feature rough surfaces which could cause resistance to the smooth flow of gases and consequently result in poor up-draught.
- Unfortunately many houses built since 1965 with clay or concrete chimney liners suffer from these being poorly installed, either through being fitted the wrong way up or not receiving an appropriate

application of mortar to make a complete seal on each joint. Even though not particularly old, this could still potentially cause smoke and fume leakage.

Your approved installer will be able to advise you on the suitability of your chimney after undertaking a thorough inspection and smoke test. Any solid fuel flexible liner which is specified should be double skinned stainless steel, either 904L or 316Ti grade and be CE marked and / or Hetas Approved. We strongly recommend the thicker 904L grade for the Aidan Eco Boiler, especially if you propose to burn smokeless coals as this will be more resistant to their associated acidic condensates.

The British Flue and Chimney Manufacturers Association website www.bfcma.co.uk, produces a number of authoritative and informative download guides to flues and chimneys for stoves.

If you are not using a flue liner then you must provide a means to sweep the chimney

The Chimney Terminal

Any existing chimney pot or terminal must be suitable for stove installation and should not restrict the smoke and fumes escaping from the stove. It must provide at least the same outlet area as the flue pipe. It may be that your existing chimney terminal has been replaced with a ventilating terminal if the fireplace has been closed off at some point and this will need replacing.

Your installer will be able to advise you on the correct specification of any new cowl or terminal. Cowls have the additional advantage of limiting rain entering the flue system which could cause the inside of the stove to rust when it is not being used, particularly during the long periods outside the heating season.

SYSTEM INSTALLATION: GENERAL GUIDELINES

Central heating systems

A pumped central heating circuit combined with a gravity hot water circuit is generally the accepted specification for solid fuel boiler systems which are not linked to another system. However, achieving the correct balance between the pumped and gravity flows in such a system is critical to the efficient performance of the boiler stove and should be left to an experienced Hetas wet installer or appropriate specialist registered on a Competent Persons scheme. Increasingly new systems are specified as 'fully pumped' to provide improved operational control and this is a feature that we would recommend for your system.

Dual fuel linked systems

You may have purchased your new Aidan Eco Boiler stove with the intention of adding it to an existing heating system powered by a different fuel type. This is likely to be a non-pressurised oil or gas system, but could also be solar powered, probably in a new pressurised system.

Linking two such systems requires specialist knowledge to ensure a fully functioning system which is efficient, safe and legal. Such systems require the installer to possess a knowledge and understanding which will be beyond the provisions and intentions of these general installation and operating guidelines. The United Kingdom's Solid Fuel Association through their website www.solidfuel.co.uk, provides informative downloads on various link-up system solutions.

The most common problem with link-up systems is a failure to understand the existing system which may have faults which are then exacerbated by the new link. Our advice when linking this boiler stove to any system is therefore to consult the appropriate installation expert who will develop an understanding of your requirements and provide you with a thorough survey of any existing system.

There are various Government competent persons schemes listing installers trained in designing and installing linked systems:

- Hetas www.hetas.co.uk
- OFTEC www.oftec.org
- Association of Plumbing & Heating Contractors (Certification) www.aphc.co.uk
- Building Engineering Services Accreditation www.besca.org.uk
- NICEIC www.niceic.org.uk

SYSTEM ESSENTIALS

The basic system diagram shown overleaf should be used for general guidance purposes only and is included here to demonstrate basic system principles. Combined with the at-a-glance list below this should provide you with a basic understanding of the essential requirements your system should have. As each system and its requirements will vary the list below is by no means meant to be comprehensive.

A good system should adhere to the following:

- Systems using two tappings must use diagonally opposite system ports
- Adjustable flow circulating pump
- High and low limit thermostats
- Cold feed pipework must be minimum 22mm dia'
- Open vent pipework must be minimum 22mm dia'
- Overflow pipe must be 22mm dia' copper
- All pipework must be able to operate at above 100°C
- Feed / expansion tank must be galvanised steel or copper
- Float valve should also be copper
- No automatic or manual valves on cold feed or open vent pipework
- Heat leak radiator fitted to gravity circuit
- Exposed pipework (eg in lofts) must be insulated to prevent freezing
- Hot water cylinder and thermostat
- System should be capable of being completely drained

Heat leak radiator

A heat leak radiator with a minimum rating of 10% of the boiler's total output to water should be fitted to the gravity circuit. Heat leak radiators rated at approximately 2kW (6,800BTU) tend to be the norm in most systems. Pipes to and from the heat leak radiator can be reduced to 15mm diameter provided the run is no further than 300mm (12") away from the 22mm gravity circuit. No thermostatic or manually adjusted valves should be fitted to the heat leak radiator to ensure that it can never be shut down. If a thermostatic control over-heat valve, which controls the flow when the water in the hot water cylinder, has reached a predetermined unsafe temperature, is specified as part of the system then you must ensure that the heat leak radiator has a rating to cope with the extra demands made on it when the hot water cylinder is isolated.

Adjustable circulating pump

It is important that the system flow can be adjusted via the circulating pump to ensure the best operation. A system flow which is too slow could potentially

over-heat or at the very least take a long time to warm the house. One that is too fast could reduce the time it takes for the water to pass through the boiler and absorb heat, thus reducing the overall effectiveness of the system. Ensure that isolation valves are fitted on either side of the pump to allow for easy pump maintenance and safe removal in the event of a fault. Allow a minimum of 1.5 metres (5') of static head and always follow the pump manufacturer's instructions. Electrical connections to the pump, like the stove installation itself, are subject to current Building Regulations.

Electrical connections

All Electrical connections to the circulating pump, motorised valves or link-up components must be in accordance with the current issue of British Standard *BS 7671 Requirements for Electrical Installations*. Where a stove system is linked to a gas system the electrical connections must comply with gas services and connections *Gas Safety (Installation and Use)* requirements. The electric system and connections must be carried out by a qualified electrician or by a person registered with the appropriate Competent Person scheme.

In England and Wales building regulations *Approved Document P* sets out the overall criteria and requirements to ensure electrical safety and have been introduced to help reduce the number of deaths, injuries and fires caused by faulty installations.

Mains water connection

In order to safeguard water quality and public health, when connecting the boiler stove heating system to the mains water you must ensure that the connection complies with all local water authority regulations. For example, a legal duty is placed on all users, owners or occupiers and anyone who installs plumbing systems or water fittings to ensure that they are installed and used in accordance with eg *UK Water Supply (Water Fittings) Regulations 1999*.

Gravity circuit pipework

Motorised valves fitted in the gravity circuit pipework must be configured to revert to the open position should the power fail. In addition, the hot water cylinder and heat leak radiator should be positioned as near to vertically above the boiler stove as possible and with sufficient height to encourage the natural flow. Any horizontal runs in this pipework should be inclined, again to encourage the natural flow.

High and low limit thermostats

A high limit over-heat thermostat set at 80°C should be fitted to the gravity flow pipework and connected to the circulating pump so that should the system temperature exceed 80°C then the pump will automatically be switched on. This safety precaution will ensure that the gravity circuit does not overheat. A low limit thermostat set at 45°C should be fitted

to the gravity return pipework and connected to the circulating pump. This should be set to come on when the water temperature reaches above 45°C to begin the circulation process.

Hot water cylinder

The water system must be properly vented and you must use a double-feed indirect cylinder which is in accordance with current issue of *BS 1566, Copper indirect cylinders for domestic purposes, Part 1 Specification* for double feed indirect cylinders is necessary where there is a combined hot water and central heating system.

This should be fitted with a thermostatic control valve which turns off the flow when the water in the cylinder has reached a predetermined temperature. If your boiler stove is part of a new heating system this is now a building regulations requirement. You must ensure that this water setting is not too hot to use, especially if there are children in the house. A temperature set at 60°C or just slightly above is recommended. Please note that temperatures below 60°C may encourage the growth of harmful bacteria such as legionella.

During commissioning, as the thermostat may not be accurate, it is important that after the system has been operating for at least three hours, the hot water temperature is tested at the tap closest to the hot water cylinder to ensure that it will not scald children or the elderly who use it. It is important that the heat leak radiator is specified with a rating to cope with the extra demands made on it when the hot water cylinder is isolated from the system.

Thermostatic radiator valves (TRVs)


The UK's *Domestic Heating Compliance Guide* stipulates that any new heating system is temperature zoned. For properties with a floor area of less than 150m² (which includes most UK homes) this can really only be achieved by incorporating TRVs and we would also recommend this where appropriate. However, two radiators on the pumped central heating circuit should not have TRVs fitted, as they will be needed to allow any excess heat to safely dissipate should the over-heat thermostat switch on. Please note these radiators could become excessively hot and we therefore recommend that these two at least should be of the low surface temperature type to help prevent accidents.

Important: Before infilling

The installer must check all boiler and system connections for leakage prior to any infilling.

System Balance

See the section on the importance of ensuring that your heating system is correctly balanced. An unbalanced system is inefficient and therefore costly to run. See page 28

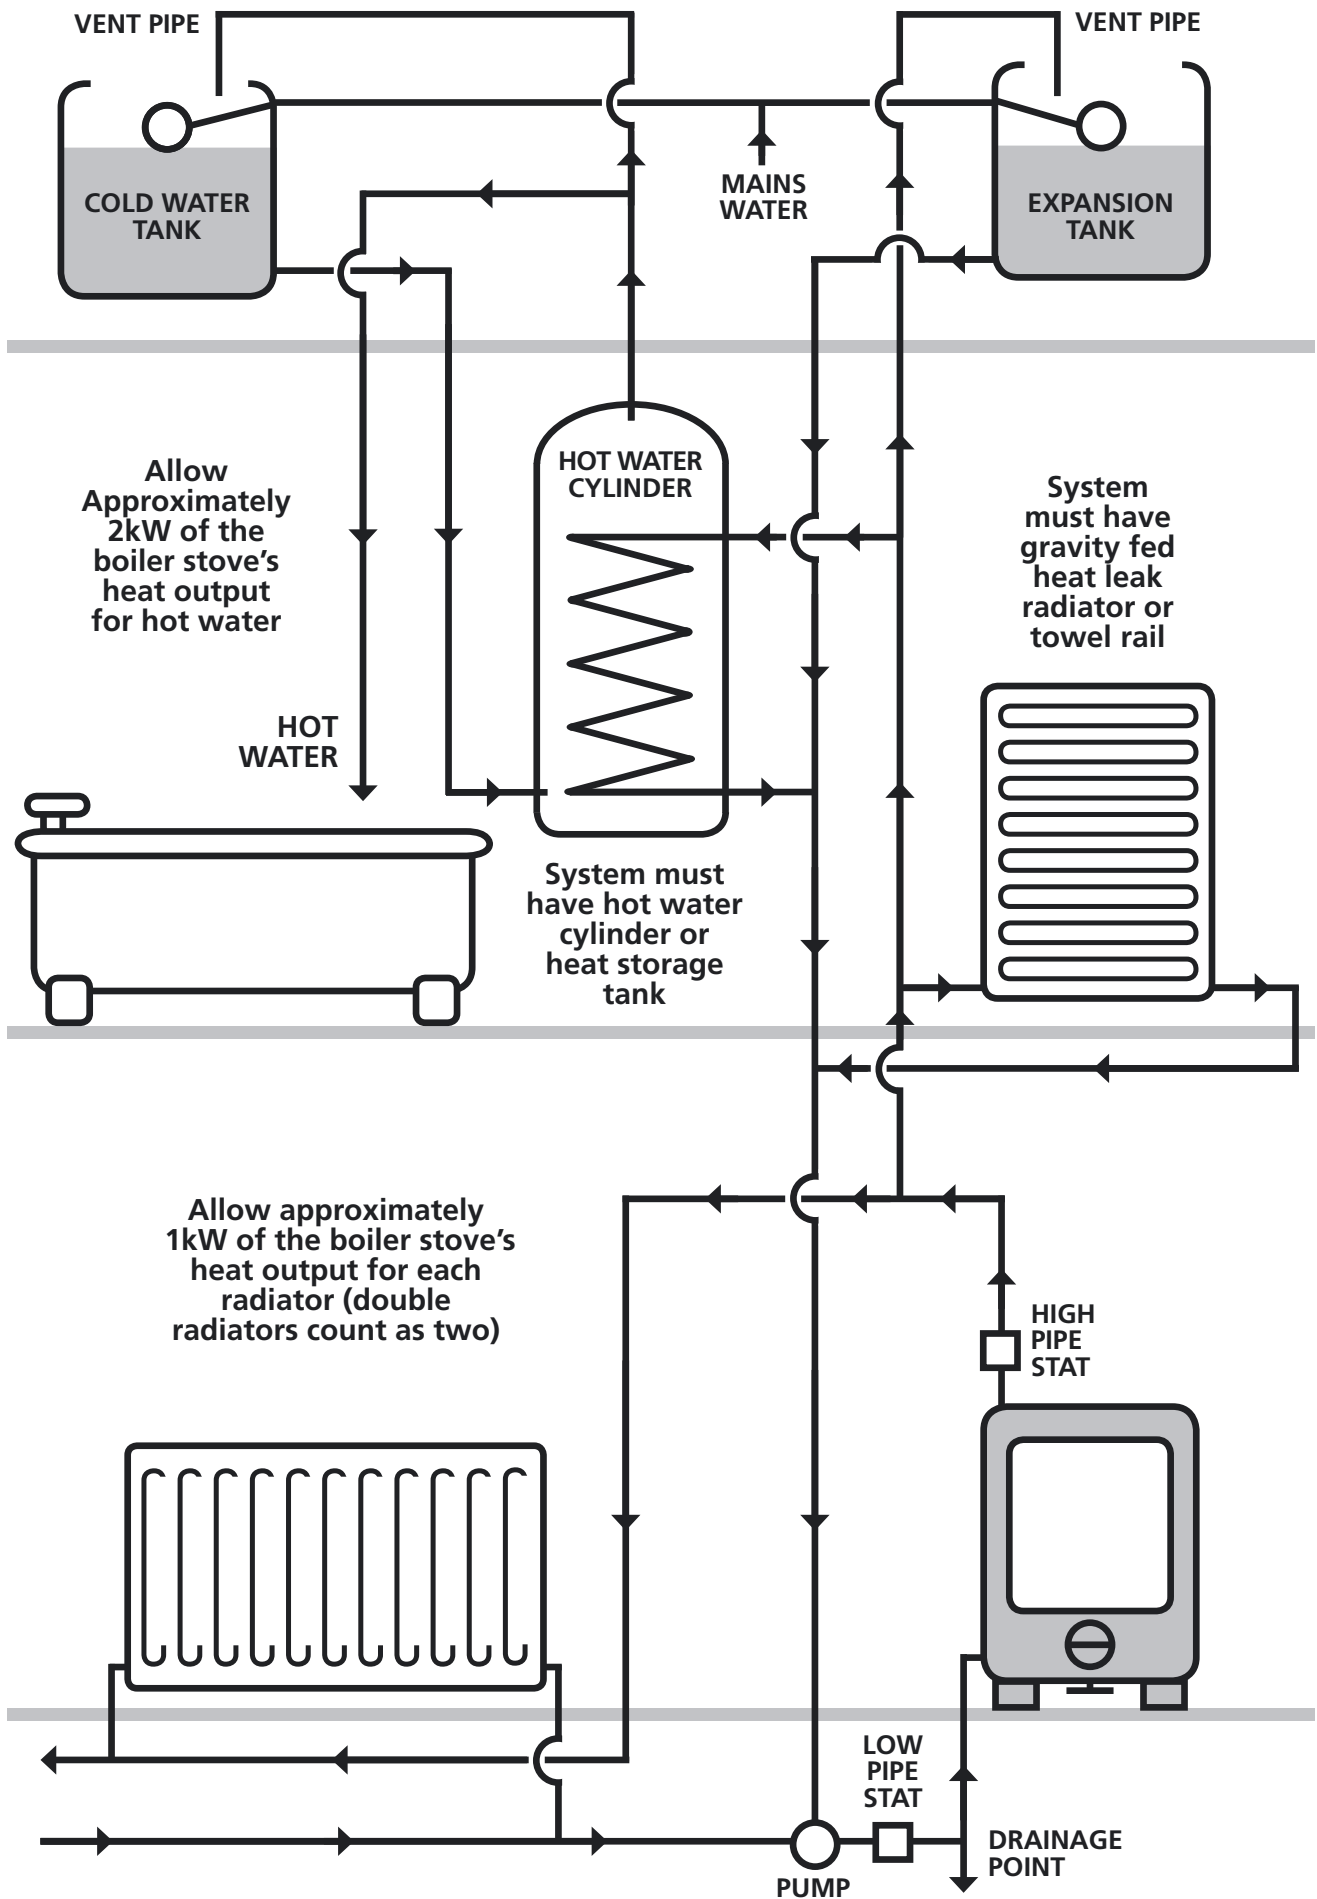

SYSTEM BALANCE

With all wood burning boiler stoves, given their particular heat cycle and the natural gravity fed flow, it is extremely important that the radiators are balanced to ensure an efficient distribution of heat as well as an even heat balance from one radiator to the next. The reason for balancing is to reduce the flow to the hottest radiators so that more hot flow is available to heat the coolest ones. The system is 'balanced' when there is a good hot water flow through every central heating radiator.

To undertake this, all of the system valves should be set to open (including any lock shield valves (LSVs) on the heat leak radiator) and the circulation pump adjusted to the correct flow speed. Thermostatic radiator valves (TRVs) should also be set to maximum to ensure that these are not activated during the balancing process. All radiators should be fully bled of air and the system should be at full operating temperature. Please note it could take the system 2 – 3 hours, depending on the size of the system and the fuel loads, to reach full operation.

The objective is to get a consistent temperature difference of approximately 10°C between the flow (80°C) and the return (70°C) on each radiator. If the circulating pump flow rate is set too high then the temperature drop between flow and return will be less than 10°C. Balancing the system means adjusting all of the various thermostatic valves, thermostats, lock shield valves on each radiator and the circulating pump speed to give the desired temperature in each room for the least amount of fuel used. This can be a time-consuming process, but is well worth it, and therefore is best left to an experienced installer.

With the system at full operating temperature and all of the TRVs fully open, if the temperature drop is different from 10°C but consistent across all of the radiators then it will be a simple matter of adjusting the circulating pump flow to achieve the desired 10°C drop. Slow down the pump flow to increase the drop difference and speed it up to reduce it. In reality it does not matter if some radiators have a slightly smaller temperature drop, hence a higher flow, so long as there is enough flow to get all of the radiators at a desirable temperature.

Fortunately, a balanced system does not mean that all of the radiators have to be set at the same temperature. How hot a radiator is once the thermostatic valve is operating will depend on many variables including the size of the room, how high the TRV is set and how big the radiator is. Radiators are likely to be slightly hotter at the top than the bottom but this will vary from system to system and the design of the radiator itself. Provided the temperature difference from the top to the bottom of the radiator is no more than the 10°C flow and return difference, then this is *not* generally an indication of a system problem.

IMPORTANT: FIRST FIRES

After the boiler stove and heating system have been fully commissioned use smaller and shorter 'gentle' fires for the first five or six times that you fire up the stove, making these progressively bigger. This will avoid any potential thermal shock and allow the cast iron components to safely temper. Allow the stove to fully cool down between these fires.

When first using the stove it is normal to experience paint fumes or see light smoke rising from some of the stove's painted surfaces. During this stage ensure that the room has additional ventilation by opening doors and windows to minimise any adverse effects. The hotter you burn the stove the more intense these fumes will be, which is one of the reasons that we advise that you use smaller fires to start with. Every time the stove reaches a new higher temperature it may still be possible to smell these fumes or see some gentle smoke until the paintwork is fully cured.

If smoke and fumes persist, or your CO alarm sounds, do not use the stove and immediately consult your installer, as this may indicate that there could be a potential issue with the installation and CO spillage.

A NOTE ABOUT CONDENSATION

It is not unusual for condensation to form on a cooling boiler or pipework under certain atmospheric conditions. Such condensation should not be confused with a boiler leak. In the unlikely event of a boiler leak a profuse supply of water, which is usually hard to stem, will occur. This is significantly different from condensation which can be easily dried out with a sponge or by re-lighting the stove. Please refer to our Boiler Warranty terms and conditions on page 35.

TROUBLE-SHOOTING

CHIMNEY FIRE

If your stove has been installed correctly and you have also operated it correctly and regularly carried out the recommended routine checks then it is unlikely that you will ever experience a chimney fire, which can be highly dangerous.

Chimney fires can be detected by an unusual roaring sound and / or unusual vibrations coming from the chimney breast or the stove itself. The sound is not to be confused with the gentle 'rushing' sound you may normally hear when a stove has a well performing up-draught. During a chimney fire you may also see sparks or flames exiting from the chimney terminal outside.

• **Prevention**

If you suspect a chimney fire then immediately close the Primary and Secondary Air controls, as well as the Thermostat Control, evacuate the building and call the Fire Service. *Never* open the stove door as this will make the chimney fire worse by providing additional combustion air. Do not re-enter the building until you have been advised by the Fire Service that it is safe.

Do not re-light the stove until the flue system has been thoroughly inspected by an approved installer or chimney sweep and any necessary repairs have been carried out.

• **Causes: Inadequate cleaning**

Chimney fires occur when soot and creosote have built up to such a level that they ignite. It is important therefore that your flue system has as many cleaning access points as practicable to enable comprehensive removal of soot, creosote and other debris. This will also minimise the amount of time it takes for a qualified sweep to clean the system making the system safer and its cleaning more cost-effective in the long run.

• **Causes: Continuous low burning**

To discourage the potential for such soot and creosote build-ups, long periods of consistent 'slumber' or overnight burning should be avoided. Or that these should at least be compensated for by regular burning on full output for short periods (eg 30 minutes per day) to help burn off any likely deposits before they become problematic.

• **Causes: Poor fuel choice** As previously mentioned unseasoned or damp wood or fuel should always be avoided as these produce excessive soot and creosote. This is particularly problematic for boiler stoves where the fire chamber temperatures are much lower than in a non-boiler stove and therefore the potential to promote the conditions for dangerous deposits from damp fuel is much greater.

Check out the Ready to Burn scheme website for the where to buy fully seasoned wood logs. Look for the 'Ready to Burn' label www.readytoburn.org.

STOVE, FLUE OR OTHER COMPONENTS GLOWING RED

• **Prevention**

The Primary and Secondary Air controls, as well as the Thermostat Control, should be immediately closed to let the fire die down to an acceptable level and to reduce the heat output which will in turn eliminate the glow from the over-heated components. At the same time ensure that water within the system is not 'boiling'. Your central heating system should have the requisite safety valves to prevent this, but if in doubt run off excess hot water and ensure the central heating pump is working to dissipate the excess heat and hot water. Over-firing is dangerous and could permanently damage or warp your boiler stove and its components. The effects of over-firing are fairly obvious to anyone in the stove industry and will invalidate your *Hi-Flame Warranty*. Check the stove, the flue system and the central heating for any signs of damage or system failure before you re-use the stove.

• **Causes: Over-Firing** This is caused by using the stove at a higher output than recommended for prolonged periods of time and / or over-filling the firebox with fuel. The excessive heat in the flue system produced by over-firing could potentially also lead to a chimney fire (See '*Chimney Fire*' above). Ensure you are using the correct fuel load. See pages 18 and 20

SMOKE AND FUMES FROM THE STOVE ESCAPING INTO THE ROOM

When properly installed and operated your stove should not normally emit fumes or smoke into the room. When first using the stove it is normal to experience paint fumes or see light smoke rising from some of the stove's painted surfaces, but these should eventually pass as the paint cures. Occasional minor smoke escape may also occur during the refuelling process. However, persistent smoke or fumes could be dangerous and in this situation you should take immediate avoiding action.

• **Prevention**

Open doors and windows to ventilate the room and let the fire go out to allow the stove to cool. *Never* pour water onto the fire as this could cause the cast iron components to break.

Most importantly, never re-light the stove until the problem has been identified and solved. If in doubt, in the first instance always seek the expert advice of your approved installer, or authorised Hi-Flame dealer.

There are a number of factors, either alone or combined, which could cause such problems:

• **Causes: A blockage** When safe to do so, examine the flueway above the baffle plate as well as the chimney system via the inspection hatch and clear any soot blockages (see pages 14 – 15). Excessive deposits could also indicate that the chimney or flue itself also

needs cleaning by a qualified sweep.

• **Causes: Inadequate supply of combustion air**

Check that any permanent air vent fitted to supply the extra combustion air required for the stove has not been accidentally blocked. Remember there should never be an extractor fan in the same room as this stove. A simple way of checking whether or not the stove is receiving enough combustion air is to open a window in the same room as the stove whilst the stove is operating. If this improves the problem then this would certainly indicate that the stove is being starved of combustion air and the advice of the original installer should be sought.

• **Causes: Extreme weather conditions** High winds or extremes of temperature can also temporarily affect the performance of the chimney draught and consequently its effectiveness in removing smoke and fumes from the stove's fire chamber. In the case of freezing temperatures it is important to build a larger pre-fire than normal to quickly provide the additional heat needed to quickly warm the flue system and to counteract the much lower temperatures at the exit point of the chimney. This is particularly important for boiler stoves which have the disadvantage of the fire chamber being surrounded by very cold water.

Unusually hot sunny days in the Spring and Autumn can sometimes produce negative pressure which will affect the up-draught and in these instances you should open a window or door to the outside to help re-balance the interior and exterior pressures which create the up-draught mechanism. Once you are confident that the up-draught has re-started you can then close any doors or windows.

• **Causes: High winds** If the problem is associated with high winds and it becomes a regular occurrence, then you will need to fit a specialist chimney cowl. These are designed to provide a stable draught and prevent specific types of problems. Specifying the right cowl should always be left to an approved installer.

• **Causes: Flue Exit** Check, especially at the beginning of the heating season, that summer tree growth has not interfered with the free passage of smoke and flue gases from the chimney top.

OVERHEATING AND EXCESSIVE FUEL CONSUMPTION

This can be caused by a number of factors.

• **Causes: Excessive Chimney Draught** This limits the effectiveness of the air controls so that the fire burns with very strong bright yellow flames and with very little difference when the air controls are operated. In such circumstances, and where possible, an adjustable draught stabiliser in the flue system may need to be fitted to ensure that the stove will always operate under a stable draught to allow the stove's controls to function correctly. In the interests of safety,

because draught stabilisers limit the exit of flue gases from the stove, they should only ever be specified, fitted and subsequently tested by an approved installer.

• **Causes: Fuel** The fuel itself may be of poor quality. For example pine and other softwoods used in the building trade will burn much quicker than a good seasoned hardwood log, such as Oak or Ash.

• **Causes: Faulty Door Seals** The rope seals around the fire chamber and ash pan chamber doors could have become worn and may not create the air-tight seal needed for the Primary Boost and Secondary Air controls to function correctly. When the stove is cold, you can easily check this seal by placing strips of paper at various points between the door and chamber and checking that when the door is closed it grips this paper. Any paper which can be removed easily would indicate a weakness of the door seal in that particular spot, in which case a complete new rope seal should be fitted. See page 34

STOVE NOT PROVIDING ENOUGH HEAT

This problem is also usually indicated by dull orange lifeless flames and wood that remains black when burning instead of light grey.

• **Causes: Poor fuel** Poor heat output is more than likely caused by poor fuel, such as 'green' or unseasoned wood or even wet wood. We cannot over-estimate how critical it is to use fully seasoned dry wood in a boiler stove.

The easiest way to check whether your wood is fully seasoned is to invest in a moisture meter specifically designed for testing wood fuel. These are relatively inexpensive and can be purchased from your stove dealer. When you bear in mind that seasoned wood with a moisture content of less than 20% will give you approximately 50% more heat than unseasoned wood, a moisture meter is a modest investment which will more than pay for itself.

Wet or unseasoned wood introduces unwanted moisture into the fire chamber, again, this is more problematic with boiler stoves which are already operating at a lower temperature because of the boiler water taking heat from the fire chamber as it warms. Wet wood further reduces the boiler stove's fire chamber temperature and thus the effectiveness of the air wash system. In addition it will cause problems of increased soot and harmful creosote deposits within the flue system.

Softwoods such as Pine produce significantly less heat output than hardwoods.

• **Causes: Air controls** Ensure that you fully understand the difference that using the Primary Boost, Secondary Air and Thermostat controls make to the performance of the stove and how they need to be balanced to determine the best way to burn your fuel.

• **Causes: Inadequate Combustion Air** A stove starved of combustion air, even when the Primary Boost and Secondary Air controls are in the fully open position, will provide limited heat output. Check that any permanent air vent fitted to supply the extra combustion air required for the stove has not been accidentally blocked. Remember there should never be an extractor fan in the same room as this stove.

A simple way of confirming whether or not the stove is receiving enough combustion air is to open a window in the same room as the stove. If this improves the problem then this would certainly indicate that the stove is being starved of combustion air and the advice of the original installer should be sought.

• **Causes: Blockages** When safe to do so, examine the flueway above the baffle plate (pages 14 –15) as well as the chimney system, either through the stove or via any inspection hatches. Clear any soot blockages. Excessive deposits could also indicate a poor choice of fuel or that the chimney also needs cleaning more often than previously thought. Such blockages could also be caused by long periods of low or ‘slumber’ burning without ever burning the stove at full output to regularly and safely burn off any potential build-up before it becomes problematic.

• **Causes: Circulation Pump** This may need re-adjusting to slow down the system’s flow because it does not provide the water with a slow enough passage through the stove’s boiler to heat up the water sufficiently. This in turn prevents the fire chamber from ever reaching a good operating temperature. It could also be that the central heating system may need to be re-balanced at the same time. See pages 26 – 27

GLASS STAINING OR BLACKENING

Glass can be cleaned easily if it is undertaken regularly and the deposits are not allowed to build up. A proprietary stove glass spray or gel is strongly recommended.

• **Causes: Air Controls** Ensure that you fully understand how the Airwash system works via the Secondary Air control and that you have determined, through some trial and error that you have the correct balance between the Primary Boost, Secondary Air and Thermostat controls that your stove needs. Generally, try to use more Secondary Air when burning wood as this air flows down and over the glass to help burn and wash away any dry particulates that have accumulated there. See pages 17 – 20

• **Causes: Poor fuel** Burning damp or unseasoned wood will cause the glass to stain as the moisture from the fuel considerably reduces the fire chamber temperature reducing the effectiveness of the Airwash system. ‘Green’ wood will also encourage sticky deposits on the glass which will prove difficult

for the impaired Airwash system to remove.

• **Causes: Continuous low burning** Continuously burning your stove with a very low flame, such as slumber burning will also cause this problem because the Airwash does not get hot enough and some blackening of the glass should be considered a ‘trade-off’. In this instance, if you’re sure that the fuel is seasoned and dry, then burning the stove at very high temperature for a short period after a long slow burn will usually burn off any sooty deposits. Glass can be cleaned easily if it is undertaken regularly and the deposits are not allowed to build up. A proprietary stove glass spray or gel is strongly recommended

MOISTURE IN THE FIRE CHAMBER

You may see moisture droplets on parts of the boiler or experience damp ash when the stove is cold or after the stove has been used.

• **Causes: Atmospheric conditions** It is not unusual for condensation to form on a cooling boiler or pipework under certain atmospheric conditions. Such condensation should not be confused with a boiler leak.

In the unlikely event of a boiler leak a profuse amount of water, which is usually hard to stem, will occur. This is significantly different from condensation which can be easily dried out with a sponge or tissue or by re-lighting the stove. After the fire has gone out, open all the air controls and leave the stove door slightly open, as this can sometimes help. Please refer to page 28 as well as our boiler Warranty terms and conditions on page 35 – 36 if you suspect a leak.

CENTRAL HEATING SYSTEM NOT PROVIDING ENOUGH HEAT OR HOT WATER

If you have ensured that the stove is functioning properly ie that it has vibrant yellow flames and is providing heat to the room, but still not delivering sufficient heat through the central heating radiators or hot water then it is more than likely to be a problem with the system itself.

The simplest way to determine this is, if possible, to check that the top water pipe from the back of the stove is hot and that the lower pipe is cooler. If this is the case then this indicates that there is a problem with the system and that the stove is functioning correctly.

• **Causes: Circulation pump or thermostatic valve failure** A fault in one of the system’s key components could restrict the system flow thus limiting heat to the radiators and / or hot water cylinder. For example, a thermostatic valve may have been activated due to a potential temperature anomaly or have stuck in the wrong position. Identifying the precise problem is a job best left to the original installer or heating engineer.

• **Causes: Unbalanced central heating system**

With all solid fuel boiler stoves, given their particular heat cycle and the natural gravity fed flow, it is extremely important that the radiators are balanced to ensure an efficient distribution of heat as well as an even heat balance from one radiator to the next. If you have linked your new boiler stove to an existing or old system then it is likely that the system needs re-balancing to work in conjunction with your stove. See page 28

• **Causes: 'Sludge' in radiators**

If you have linked your new boiler stove to an old central heating system and you have bled (and / or balanced) your radiators and there is still a lack of heat then the chances are that your radiators will be contaminated with sludge. This is a thick black sediment which inhibits the flow of hot water. Your system will need flushing with the appropriate chemical agent. This can be a time-consuming and messy job and is best left to a plumber or heating engineer.

EXCESSIVE FIRE CHAMBER COMPONENT WEAR

Over time you may see some warping and possibly even breakages in the cast iron components within the fire chamber such as the fire fence, firegrate and baffle plate. These components are regarded by the stove industry as consumable components and are not normally covered under the stove warranty. However, if such wear occurs very quickly, say within the first year of operation, then the way the stove has been operated should be reconsidered.

• **Causes: Over-firing** Over-filling the stove with fuel loads greater than that recommended in this handbook (see page 18 and 20) will produce an excessive amount of flame and heat at temperatures which will quickly over-heat the components, warping them and quickly reducing their lifespan. Ensure that you always use the correct fuel load and use the air controls to regularly moderate the heat and improve fuel economy.

• **Causes: An over-filled ash pan** Allowing the ash pan to fill up so that the ash build-up bridges the important air gap between it and the underside of the firegrate will quickly warp and weaken the firegrate to the point that it eventually breaks. Ensure that this is regularly emptied.

• **Causes: Insufficient ash bed** A wood ash bed of around 25mm (1") deep is not only essential for efficient wood burning but also to provide the firegrate with some protection from direct heat. Only reduce the ash bed when it begins to spill. Approved smokeless coal ash (but not wood ash) should always be routinely riddled during the stove's operation to ensure that the fuel receives the continuous supply of Primary Boost air from under the grate that it needs for effective combustion.

In the interests of your safety only ever use genuine Hi-Flame replacement parts.

ROUTINE CHECKS

During routine checks if you notice anything wrong with your stove then it should be rectified immediately. Never use a stove that you know is not fully functioning – this includes flue components.

- Check your flue system at least once a month using one of the systems recommended inspection methods. After a few checks you will notice a pattern of soot build-up to enable you to determine the inspection and cleaning period best suited to your stove's operation.
- Check and clear the stove's baffle plate and flueway at least once a month. Lift and pull the baffle plate forward, drop down and remove. If soot build-up is excessive then also remove the flueway access hatch and thoroughly clean any debris or caked soot. See pages 14 and 15
- Make sure the door maintains a good tight fit and visually inspect the door rope seals for fraying or other signs of wear. Test the seal if you suspect that it is no longer air-tight. See page 34
- Check that the glass is not chipped or cracked and that the glass sealing tape is still in good condition. Replace if necessary. See page 34.
- Check the condition of any vermiculite firebricks. These will only need to be replaced if the wear and tear exposes the bodywork. Over time some panels may start to crumble but these will only need replacing when the overall depth of any part of the brick has been reduced to approximately 12mm (1/2").



REGULAR MAINTENANCE

• **Baffle Plate and Flueway** During the heating season check the flueway and baffle plate at least once a month to start with and remove any soot deposits. Should these be excessive then have your chimney and flue cleaned. At the same time review your choice of fuel and the way that you operate the stove. See pages 14 and 15 regarding *Accessing The Flueway* and *Removing The Baffle Plate*.

Regular long periods of slow or overnight burning can create excessive soot because the stove is not operating at the temperature required to burn off most of the sooty deposits. Damp or unseasoned wood will also have similar effect. To find a local registered sweep visit www.guildofmasterchimney-sweeps.co.uk or www.chimneyworks.co.uk.

• **Chimney Cleaning** The Aidan Eco Boiler can be swept through the stove by simply removing the baffle plate. The baffle plate can be dropped down and out of the way and the top of the boiler, flueway and flue can also be accessed by removing the inspection hatch on the fire chamber top. See pages 14 and 15.

Sweep your chimney before installation and then at the end of each heating season when you stand down your stove. Burning seasoned dry wood means that you will probably need to sweep every three months. The amount of soot deposits removed each time is a good indication of how often you should sweep and as you begin to understand your stove and the wood you burn you can adjust the cleaning intervals accordingly. If in doubt seek the advice of a qualified chimney sweep who has experience of stoves.

• **Firebricks** There are two small firebricks as standard at the front of the fire chamber, just below the log bar. These only need replacing if they have crumbled away and have exposed the bodywork. Small cracks can be repaired with fire cement (follow manufacturer's instructions). Ensure the stove is cold when you replace the firebricks. First remove the log retaining bar by lifting it upwards to expose the bolt head at the top of the firebrick retaining clamp. Always use penetrating oil to help release the bolt and use the correct sized spanner or socket. Do not force the bolt. Then simply remove the damaged bricks and replace them both with new ones. When replacing and clamping the bricks in place ensure they make good contact with the inside wall of the fire chamber as well as the top of the firegrate carrier frame. This will ensure that the integrity of the combustion air flow within the fire chamber is maintained.

Check the condition of any vermiculite firebricks and replace if necessary (see page 32 overleaf).

• **Cleaning the Glass** Using damp or 'green' unseasoned wood, filling with small fuel loads or operating the stove at low temperatures (slow overnight burning) will reduce the effectiveness of the Airwash system and cause the glass to stain. Do not

allow such staining to build up as it will become more difficult to remove after each firing. When used regularly, a proprietary scratch-resistant stove glass cleaning gel or spray, which can be supplied by your stove dealer, applied with a soft cloth, should be sufficient to keep the glass in pristine condition. Make sure the glass is cold before you apply such cleaners, as applying a cold solution to hot glass could create a thermal shock within the glass causing the glass to crack. Also make sure that all traces of the cleaning fluid have been removed and the glass is thoroughly dry as any residue can be 'baked' on causing unsightly smearing.

• **Replacing Glass** Never use your stove if it has cracked or missing glass. Your Hi-Flame dealer can quickly supply you with a new piece of heat-resistant glass should you ever need it – just let them know the stove name and model number. Only use heat-resistant glass as this is made to withstand temperatures of up to 800°C.

Remove the screws and sprung clamp washers from each corner and place them in a safe place. Always use the correct sized Phillips crosshead screwdriver and use releasing oil if the screws prove difficult to remove. Be careful not to dislodge the ribbon seal. If this is damaged or more than a year old then replace it completely. The resilience of a new seal will provide a much-needed expansion gap between the door and the glass clamp to help prevent the glass from cracking as it expands. New ribbon seal can be held in place with rope seal glue which will be available from your dealer. Lubricate the screws and holes and reverse the process, being careful not to over-tighten the screws and clamps in case you break the glass.

• **Paint Finish** Your stove has been finished with heat-resistant paint and is very easy to maintain. Regularly remove ash and dust from surfaces with a soft cloth or brush. To maintain the original paint finish you can use traditional 'stove black' polish which your Hi-Flame dealer can supply. Make sure the stove is cold and use protective gloves as this type of polish can cause deep staining to the skin and fingernails.

Repair worn or scratched surfaces with a proprietary heat-resistant spray paint made specially for stoves, also available from your stove dealer. Never use an aerosol spray on, or near, the stove when it is burning or if it is hot.

• **Enamel Finish** In order to keep the stove's enamel surfaces in pristine condition regularly wash them with a soft cloth and mild soap when the stove is cold. Ensure that any excess moisture is removed at the end of the washing process. Do not use any cleaner which has an abrasive content as this will remove the shine from the enamel. Any heavy staining caused by wood fuel residue can be removed by soaking the affected area with stove glass cleaner and, once dissolved, removed and polished with a soft cloth. Any chips in


the enamel should be repaired immediately with an appropriate enamel repair kit to avoid the damaged enamel flaking off and the area becoming larger.

• **Door Rope Seals** It is important that you maintain a tight door seal as this prevents unwanted air leaking into the fire chamber and helps make the Primary and Secondary Air more effective in controlling the fire.

When the stove is cold, to check the door stove seal, place strips of paper between the door and 'door frame' and shut the door. If you have to pull hard to remove these or they tear, then you have an effective door seal. If these can be easily removed or if they slide around you will need to replace the door seal.

To replace, carefully remove the old seal and completely clean the seal channel of debris and old glue. Use liberal amounts of proprietary heat-resistant fire rope glue and glue both ends of the rope to ensure a well-sealed joint. Also replace the middle horizontal rope that seals the ash pan chamber from the fire chamber to maintain a good Primary Boost Air flow.

The recommended rope seal diameter is 12mm.

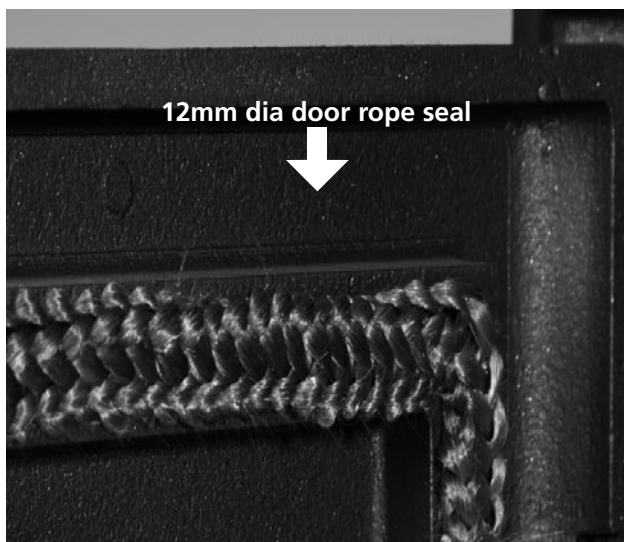

• **Air Supply Controls** There are three air supply controls on the Aidan Eco Boiler stove (see page 6) and you need to check that these remain fully functional to ensure the best operation of your stove. Set the Primary Air Boost control wheel to fully open and apply a few drops of machine oil (there is no need to remove the knob).

Machine oil can also be applied with an aerosol to the Secondary Air slider and control knob at the top of the stove as well as the Thermostat flap towards the back of the stove. Work the oil in by opening and closing the controls a few times. Be careful to protect the hearth and fireplace and any other potentially porous surfaces from the oil and do not use the aerosol when the stove is in operation.

You may experience light some fumes from the stove when you re-light it as any excess oil is burned off.

STANDING DOWN

There may be some point in the year when you will not need to use your stove for some time and taking care to clean it thoroughly then will save you much time later. This is also a good time to get your chimney swept too as this will prevent any soot build-up from falling inside the stove or 'caking' and blocking the flueway or flue system.

- Remove and clean any deposits from the top of the baffle plate and check for wear.
- Remove any debris and deposits from the inside of the stove particularly at the entrance to the flueway.
- Empty the ash pan and thoroughly clean out the ash pan chamber.
- Check all rope seals and replace damaged ropes that do not provide a good seal.
- Check any fire cement bonds around the flue pipe and other flue joints. Remove any loose cement and re-seal.
- Check the grate for signs of wear. Excessive wear, such as on the grate bars or fire fence which are bent or warped, could be an indication of over-firing or using inappropriate fuels such as petroleum coke. Order genuine replacement components from your authorised Hi-Flame dealer.
- When standing down at the end of the heating season air controls should be left in the open position to allow some movement of air which will help prevent condensation and moisture building up inside the stove and flue system. These can be closed up to 50% if it gets too draughty.

NB If draining the system, do not leave the boiler empty for any longer than is absolutely necessary and when refilling always use a proprietary chemical water treatment to protect the boiler from corrosion and the build-up of solid deposits.

Never operate the boiler stove without water

AIDAN ECO BOILER SPARE PARTS

In the interests of safety, only ever use genuine Hi-Flame replacement components. Once you have identified the component you need this will be readily available from your authorised Hi-Flame dealer.

Heat Resistant Glass Size

375 x 255 x 4 mm

Glass Gasket Seal

Approx 126 cm (4'3") long

Door Rope Seal

12 mm dia x approx 146 cm (5'11") long

Ash Chamber Door Rope Seal

12 mm dia x approx 110 cm (3'8") long

Firebricks (If fitted) Precisely engineered to fit your Aidan Eco Boiler to deliver superior efficiency and reduced emissions.

THE HI-FLAME WARRANTY

VERY IMPORTANT:

Your new Hi-Flame Aidan Eco Boiler has been CE EN13240 tested in the EU to ensure that it meets strict constructional, performance and safety standards. It is not the responsibility of Hi-Flame or their distributors to ensure that the appliance is installed and operating correctly at the time of the installation. **This is strictly the responsibility of the stove owner and any complaints regarding the performance of the installation should be addressed to the stove dealer or the stove installer.**

Hi-Flame offers the original retail purchaser a 1 Year Warranty with a further limited 4 Year Extended Warranty subject its terms and conditions being met and when the stove has been registered at www.hi-flame.ie. Claims under this Warranty must be reported in the first instance to the dealer you purchased the stove from. The claim will only be entertained by Hi-Flame or their distributors if it follows the procedures outlined below.

TERMS AND CONDITIONS

Please note: All claims must follow this procedure.

Your stove is guaranteed against defects subject to the following conditions:

1 The stove must have been installed by a qualified / government recognised stove installer and upon completion the appropriate Hetas or Building Notice Certificate of Completion, which specifically covers the installation of the stove, has been issued. A copy of this must be attached to the claim form. *For legal and insurance reasons, without this approved paperwork, the stove installation must be regarded by Hi-Flame as illegal and potentially life-threatening and therefore we cannot entertain the Warranty claim (This does not limit your statutory rights). In such instances you must contact the stove installer.*

2 The sales receipt or invoice for the stove must be kept as proof of purchase and a copy attached to the claim.

3 The serial number of the stove must not be damaged or missing and must be quoted on the claim.

4 You must not have used the stove to burn any of the prohibited fuels listed in the Instruction manual.

5 The stove must never have been operated without being connected to a hot water system or without water in the boiler

6 The stove must have been continuously kept in a serviceable condition and you must not have allowed the stove to corrode. *Warranty claims for stoves which are more than 12 months old must include the annual service record and a copy should be attached to the claim.*

7 You must not have modified the construction of the stove in any way.

8 The stove must not have been used for commercial purposes (eg rented or holiday accommodation, public bar, where the stove's operation could be subject to abuse).

What the Hi-Flame Warranty covers

- Bodywork
- Doors, Door Handles and Door Hinges
- Spigot / Flue collar
- Primary, Secondary and Tertiary Air Controls
- Ash Pan and Multi-Purpose Tool
- Enamelling (if applicable)
- External Riddler Control
- Boiler and Thermostatic Control

Hi-Flame guarantee that your product will be free from defective parts, materials and workmanship at the time of purchase by the original consumer for a period of 1 year for components, bodywork casing, door and boiler (parts and labour), excluding consumable parts. The optional further 4 Year Extended Warranty for the bodywork casing, door and boiler (parts only) is only applicable if the Warranty Registration has been completed in full (including the Installer / installation requirements) at www.hi-flame.ie.

Hi-Flame will repair or replace at its option any stove or stove part thereof found to be defective under these Warranty Terms and Conditions.

Boiler Warranty Claims

In the case of a suspected leaking boiler (see trouble shooting section regarding condensation on page 29) the stove must be decommissioned and carefully transported to Hi-Flame at the owners expense. If a boiler leak through normal operation is confirmed by the Hi-Flame technical department pressure tests then, under the terms of Hi-Flame's Warranty, your reasonable expenses (provided receipts are provided to us) will be reimbursed and an appropriate replacement supplied, subject to model availability.

What the Hi-Flame Warranty DOES NOT cover

In line with stove industry practice the Warranty does NOT cover the following 'consumable' items

- Fire Ropes and Gasket Seals
- Heat Resistant Glass
- Baffle / Throat plate
- Firegrate and Firegrate Carrier Frame
- Fire Cemented Joints
- Firebricks
- Painted surfaces

The Warranty does not cover an illegally installed stove (see point 1 above).

Limits of Warranty

The Hi-Flame Warranty is not transferable and applies to the original retail purchaser only. It does not cover the failure of the appliance due to accidental damage, misuse or abuse, modification, illegal installation, repairs (other than those by the authorised dealer) or failure to maintain the stove in a serviceable condition.

Under no circumstances shall Hi-Flame be liable for any incidental or consequential damage claims of any nature whatsoever arising from the non-conformance of the stove under the terms of the manufacturer's Warranty. These include loss of profit, commercial losses, transport costs and damage during transport, costs in connection with any dismantling and reassembling of the stove and its installation components.

The maximum value of the *Hi-Flame Warranty* cover shall not exceed the value of the stove's original purchase price.

The terms and conditions of the warranty do not affect, nor or they intended to affect, your statutory rights.

ANNUAL SERVICE

In the interests of safety it is important that your Aidan Eco Boiler stove is serviced on an annual basis in accordance with the instructions outlined below. This should be carried out by a suitably qualified person such as your original approved installer, a Hetas or INFO registered installer or your authorised Hi-Flame dealer.

When the stove is cold strip, clean and inspect it.

Internal Components Remove and inspect the following: Vermiculite Firebricks (if fitted), Baffle Plate, Grate Assembly and Ash Pan. Remove the flueway access panel (see *Regular Maintenance* pages 33 – 34 and pages 14 – 15).

Use a stiff brush to clean the baffle plate, the top of the boiler and flueway as well as the grate assembly. Carefully wire brush the inside of the stove which is essentially the outside of the boiler and remove all ash and debris from the firebox and ash pan chamber.

Check all parts for wear or damage and replace as necessary. Remember, firebricks only need replacing if pieces are missing and this exposes the metal work.

Re-fit internal parts and flueway access lid.

Stove Glass Check the glass for chips or cracks and the glass seal condition and replace if necessary. Thoroughly clean the stove glass on both sides.

Door Seal Check that this makes an air-tight seal and replace if necessary. Ensure that the new rope joint is also in the middle at the base of the rope seal channel

External Bodywork All external surfaces should be dusted with a soft cloth or light brush.

- Examine all paintwork for signs of wear and re-paint these areas using an appropriate heat-resistant black aerosol paint. *Warning: do not use the aerosol if the stove is alight or hot.*

- Lightly oil the hinges and locking mechanisms.

Air Controls When standing down at the end of the heating season these should be left in the open position to allow some movement of air which will help prevent condensation and moisture building up inside the stove and flue system. These can be closed up to 50% if it gets too draughty.

Liner Connection If a chimney liner has been installed then if possible check that the liner is secure and that the cement seal is still good. Repair any crumbling or failed seals. Alternatively get your sweep to check this for you.

Chimney Always have the chimney swept at the same time.

Important In the interests of safety use only genuine Hi-Flame replacement parts which are readily available from your authorised dealer.

SERVICE RECORD

FIRST SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

SECOND SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

THIRD SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

FOURTH SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

FIFTH SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

SIXTH SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

SEVENTH SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

EIGHTH SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

NINTH SERVICE

Date

Next Service Due

Work carried out:

Signed

Print

Dealer's Stamp or Hetas Registration Number

COMMISSIONING

1 Internal Parts

Confirm that all internal parts of the stove are correctly fitted, including the baffle plate (see page 14).

2 Doors and Seals Confirm that the door closes correctly and that the door seals make an all round air-tight seal.

3 Smoke Test

When the installation is complete it is important that a final safety smoke test is carried out.

Fully open the Primary and Secondary Air controls, as well as the Thermostat Control, and warm the flue by using a blow torch, being careful not to let the flame damage any painted surfaces etc. After about 10 minutes of warming, quickly place an approved smoke pellet in the middle of the firegrate, light it, and close the stove door. Check the flue terminal to ensure sufficient smoke is escaping. Repeat this with the room doors (and any open windows) fully closed.

Remember, this stove should not be installed in the same room as an extractor fan. However, if there is an extractor fan in an adjacent room then this requires a separate test with the fan switched to full and the room door left open to establish the worst case scenario.

After completing a successful smoke test, then a spillage test should also be undertaken (see below).

4 Spillage Test

Boiler stove firechambers operate at a much lower temperature than non-boiler stoves and therefore, in the interests of safety and to avoid any potential carbon monoxide (CO) leakage, it is critical that a spillage test is carried out by the approved installer.

Light the stove in the normal way (see pages 18 and 20) and make sure that the stove is at full operating temperature – this will be with a completely burning fuel load and could take around 30 minutes, however it cannot be rushed. Check that smoke or any other combustion products do not enter the room during this stage. Please see the note on paint fumes. See *Important: First Fires* page 28.

Also ensure that the Primary and Secondary Air controls, as well as the Thermostat Control, are all fully operational.

5 System Balance

When the heating system is fully running after approximately 2 hours, the central heating system should be 'balanced' – see page 28.

6 Safe Operation

Explain the safe operation of the stove to the user and the importance of using the correct fuel. See pages 16 – 21.

7 Legal Requirements Explain the householder's legal requirement to use an approved fireguard whenever children (or the elderly and the infirm) are likely to be in the vicinity of the stove. If the installation is in a designated Smoke Control Area then also explain the householder's responsibility to only use approved smokeless fuels.

8 Instruction Manual

Make sure that the customer receives this copy of the *Instruction Manual*

9 Warranty Registration

Register your new Aidan Eco Boiler at www.hi-flame.ie to receive all of the benefits of the *Hi-Flame Warranty*. You must include the installer's Hetas / INFO or competent persons registration number and contact.

10 Carbon Monoxide Detector

Ensure there is an approved carbon monoxide (CO) detector fitted in the same room as the stove and that it has also been tested. Explain to the householder the importance of testing it regularly. See page 2

SYSTEM NOTES AND SETTINGS

For future reference the installer should include a basic drawing of the system and notes on the circulation pump and system thermostat settings etc as well as their location and the location of the system drain point.

HOUSEHOLDER'S INSTALLATION NOTES

Date of
Installation

Annual Service
Due (month)

Stove dealer's name, address and contact

Stove installer's name, address and contact Details

Chimney sweep's name and contact

Log supplier's name and contact

hi-flame

OUTSTANDING ECODESIGN STOVES

HI-FLAME SPARES SERVICE

In the interests of safety, only use genuine Hi-Flame Precision I replacement components. Once you have identified the component you need you can order it from your authorised Hi-Flame dealer or directly from www.hi-flame.co.uk in the UK or from www.hi-flame.ie in the Republic of Ireland.

PLEASE NOTE

Any issues with the performance of your stove that cannot be resolved through studying the Trouble-Shooting section (pages 31 – 36) should always be dealt with, in the first instance, by contacting the original installer of your stove or alternatively your stove dealer.

Hi-Flame Multi Fuel Stoves

Hi-Flame Fireplace (UK) Limited
Holmes Chapel Business Park
Manor Lane, Holmes Chapel
Cheshire
CW4 8AF
United Kingdom

© Hi-Flame Fireplace (UK) Limited 2023. All rights reserved.
Booklet contents may not be copied in whole or in part
without the prior written permission of the copyright
holder. Aidan® is the registered name of Hi-Flame
Fireplace (UK) Limited

www.hi-flame.ie