PRODUCT INFORMATION



SAFETY & CARE MAINTENANCE

Ensure your pet is not left in a closed vehicle. Provide a constant source of water & proper ventilation for your dog at all times.

SERVICE - DO NOT RETURN TO YOUR RETAILER

If you require help in assembling your Zinger Aluminum Dog Crate please call 1-800-351-8411 for assistance. Zinger Sport Dog Gear Inc. will repair or replace any defective parts and material.

PRODUCT WARRANTY

Zinger Sport Dog Gear Inc. warrants that all hardware, powder coating and structural panel components shall remain in good operational and structural condition for a period of one year from the date of purchase.

Any defect or malfunction that has occurred because of unreasonable handling, improper application, or failure to perform necessary maintenance will result in voiding this warranty.

Any Zinger Aluminum Dog Crate that have been modified by any person other than a suitably authourized representative of the Zinger Sport Dog Gear Inc. will also result in voiding this warranty.

Zinger Sport Dog Gear Inc. liability is limited to repair or replacement of any affected parts FOB factory. Zinger Sport Dog Gear Inc. will not be responsible for any charges related to shipping, duties, or brokerage fees.

Zinger Sport Dog Gear Inc. reserves the right to discontinue or change parts and products of current manufactured models.



TO ORDER: 1-800-351-8411 FAX: 1-905-876-3360 WWW.SPORTDOGGEAR.COM

264 Bronte St. South #13, Milton, Ontario L9T 5A3 Canada Published by Zinger Sport Dog Gear Company





User Manual

Models: All Zinger Deluxe Crates







CONGRATULATIONS!

You have just purchased one of the finest Aluminum Dog Crates available.


Zinger $^{\mathbb{M}}$ crates have been designed and manufactured to the highest standards to provide your dog a safe and secure means of transportation and housing. If you travel by air with your dog be sure to install Zinger $^{\mathbb{M}}$ Airline Rails in order to conform to your airline's transportation rules.

Our main focus when designing these crates was safety. We want pets to be safe and secure at all times. Please be sure to provide a constant source of water & proper ventilation for your dog while inside a crate.

Thank you for choosing to buy a Zinger™ Aluminum dog crate and remember, "If you are happy with your purchase please tell your friends, and if you're not happy for any reason tell us first and we will make it right."

-Robert Sampson, Zinger Sport Dog Gear

COMPONENTS:



Required: - Phillips Screwdriver

- 8mm or 5/16" wrench (for acorn nuts)
- 7mm or 9/32" wrench
- 3/8" wrench (for locking nuts)
- OR an Adjustable wrench
- Helper

Carefully unpack and separate the contents of the box. Sort and position the panels in the configuration shown above.

IMPORTANT: You will need a helper and a flat work surface to assemble the crate.



Airline Rails
For extra protection and airline approved



Handles - Stainless Steel Stainless Steel Handles allow for easy carrying



Slam Latch- Stainless Steel Locking Slam Latch provides security



Grooming Top / Crate Mat Non slip pebbled rubber mat. Allows you to use the top of your crate as a grooming table



Raised Crate Flooring Keeps your dog high and dry off the kennel floor.




Removable Caster Wheels Allows for easy travel




Crate Cover Kennel Jacket provides protection from rain, snow, wind and the sun AIRLINE RAILS (optional) - If you plan on traveling with your pet by air you will need to install Zinger™ airline rails on your crate. If your model did not include AIRLINE RAILS, you can order them by calling

1-800-351-8411.

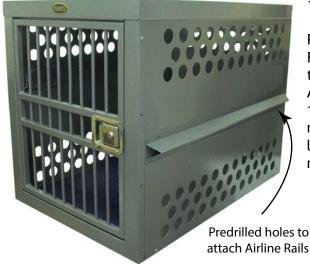


Position the AIRLINE RAILS to match up with the predrilled holes. Assemble using (16) 10-32 x 1/2" Pan Head machine screws and lock nuts (included with rails).


CARRY HANDLES (optional) - Using the diagram that matches your model, position the handles on the crate to the predrilled holes located on both of the side panels. Install the handles using the provided screws and lock nuts.

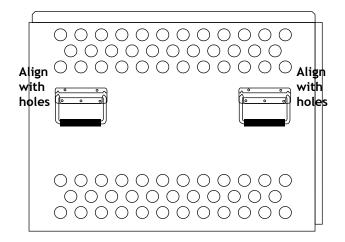

NOTE: IT IS IMPORTANT TO HAND ASSEMBLE ALL NUTS AND **BOLTS BEFORE FINAL TIGHTENING.** Attach back panel(B) to base panel(A) using (3) machine screws and nuts. Do not tighten nuts and bolts until the crate is assembled completely.

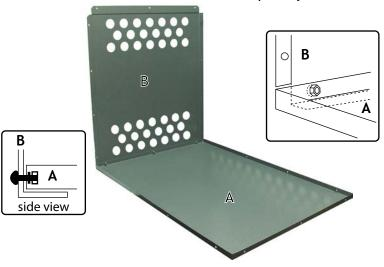

2. Position the right side panel(C) into place as shown. Align holes and insert machine screws. Hand tighten all nuts and bolts.

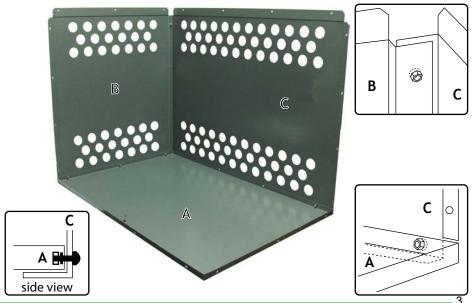




3. Position the left panel(D) into place as shown. Align holes and insert machine screws. Hand tighten all nuts and bolts.




4. Set door frame(E) into place. Align holes and insert machine screws. Hand tighten all nuts and bolts.





5. Slide the front edge of the top panel(F) into the upper door frame and adjust toward the back of the crate. Set the top panel into place and assemble nuts and bolts. Check the fit of the panels and the operation of the door. Finally, tighten all nuts and bolts.

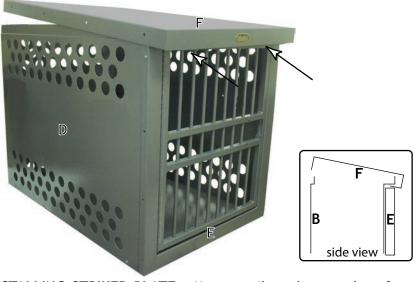

using a 8mm - 5/16" wrench to tighten screws and nuts.

BACKUP LOCKING PLATE (optional): Postion the plate within the inside of the doorframe and secure using the same screws and nuts

INSTALLING DOOR LATCH - Mount door latch to barred door using a

7mm(9/32) wrench.

