



## 800TS Jazzplate

The 800TS preamp borrows the EQ section of the famous GK800RB amplifier and squeezes it into an onboard preamp, loaded into a Jazzplate, for you Jazz bass lovers. This tone stack has some serious high frequency power and a very deep bottom end, just like the amplifier its based on.

The Hi-mid and Treble controls are highly interactive; same goes for the Lo-Mid and Bass controls.

This Jazzplate comes with two options; Neck Volume and Bridge Volume or Master Volume and Blend.

**Installation and Warranty:** This is a solderless preamp. Any tampering with the preamp (ex: soldering or unsoldering directly on the preamp or any of its components) can result in Warranty void.

**-Treble:** Boost and cut around 4khz


**-Hi- Mid:** Boost and cut at around 1khz

**-Bass:** Boost and cut at around 60Hz

**-Lo- Mid:** Boost and cut at around 250Hz -

**Voltage:** 9 to 27VDC

**Current Draw:** 2mAh (9v)

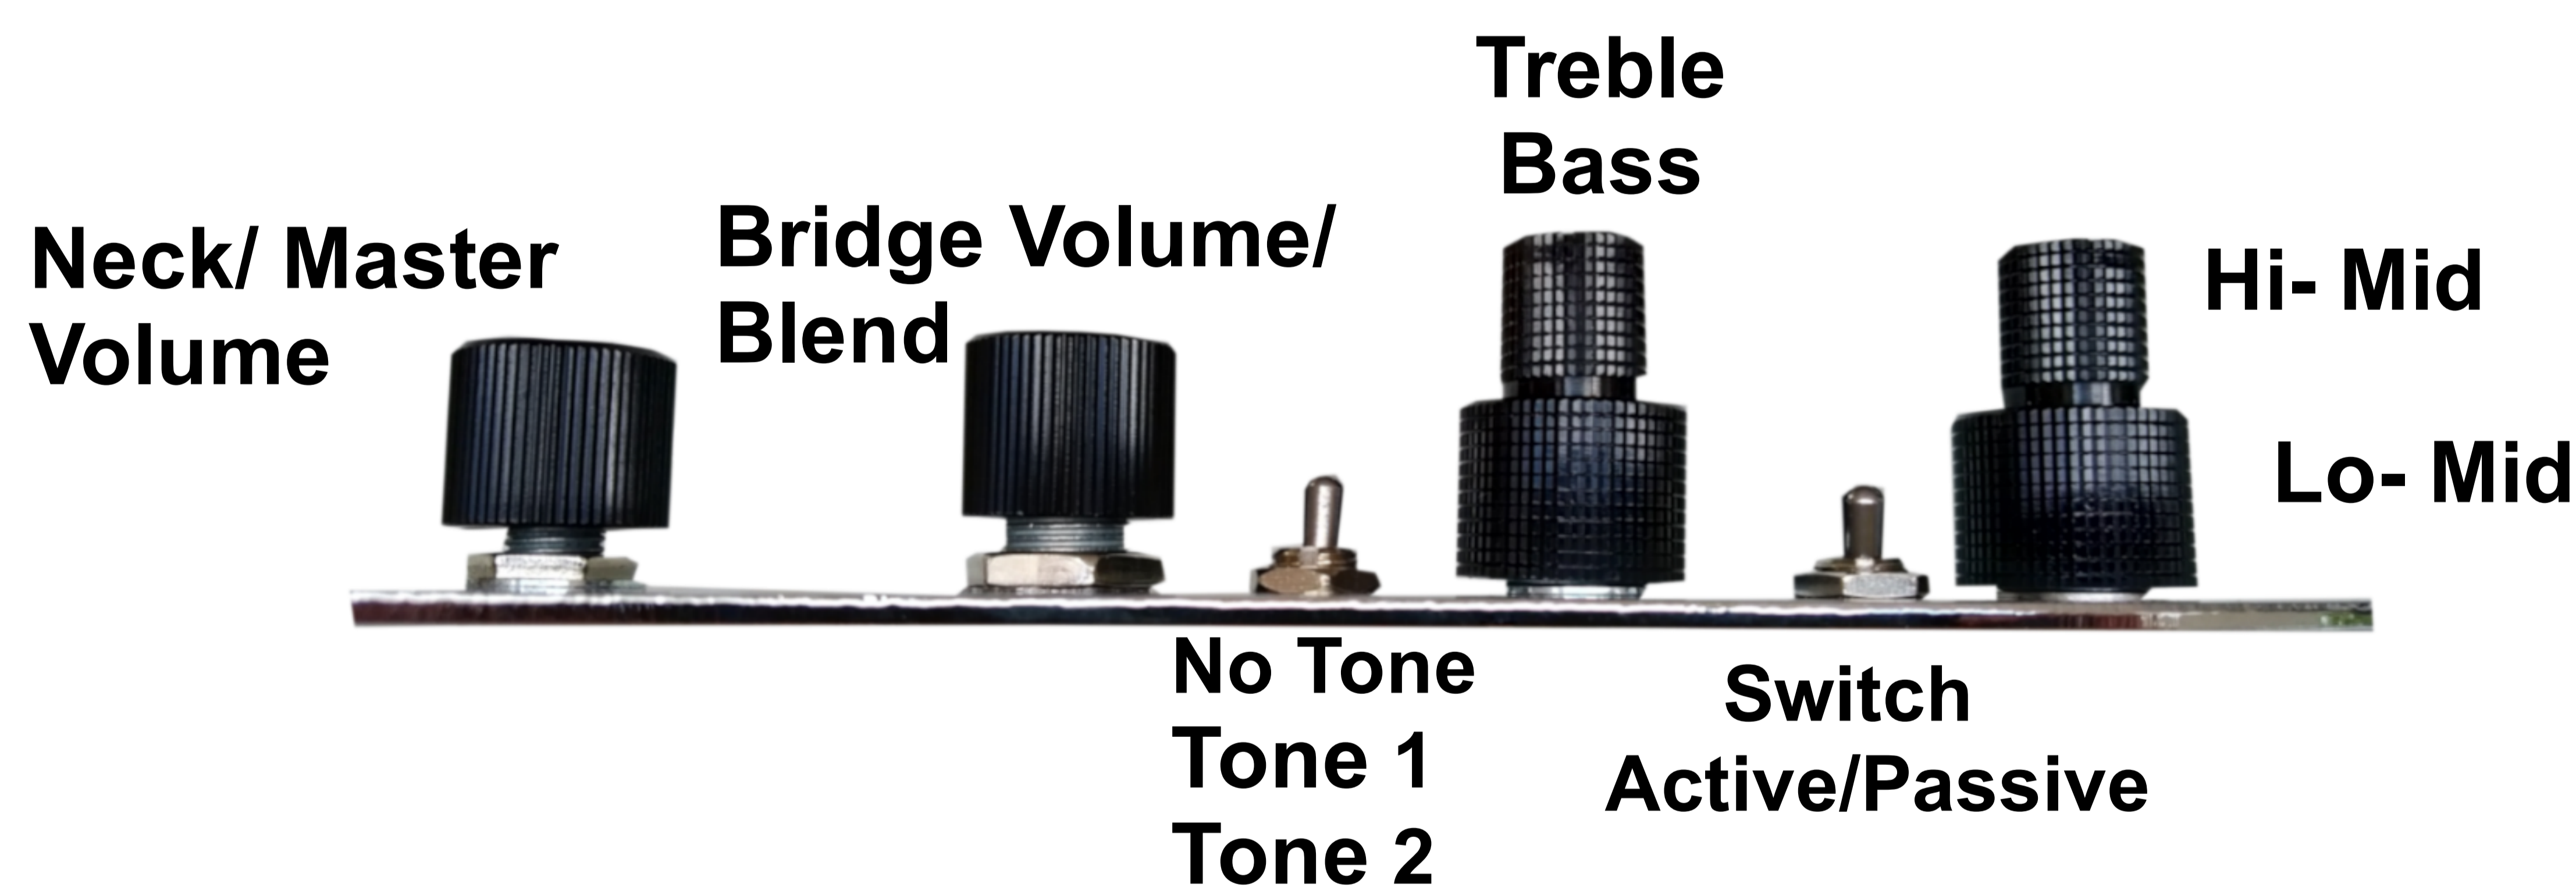

**Red:** + battery red wire

**Black:** - battery black wire



**B=** Hot from Bridge pickup  
**GND** for Bridge pickup


**N=** Hot from Neck pickup  
**GND** for Neck pickup

1- Extra Gnd connector

2- From Jack Ring (follow the colour)

3- From Jack Sleeve (follow the colour)

4- From Jack Tip (follow the colour)

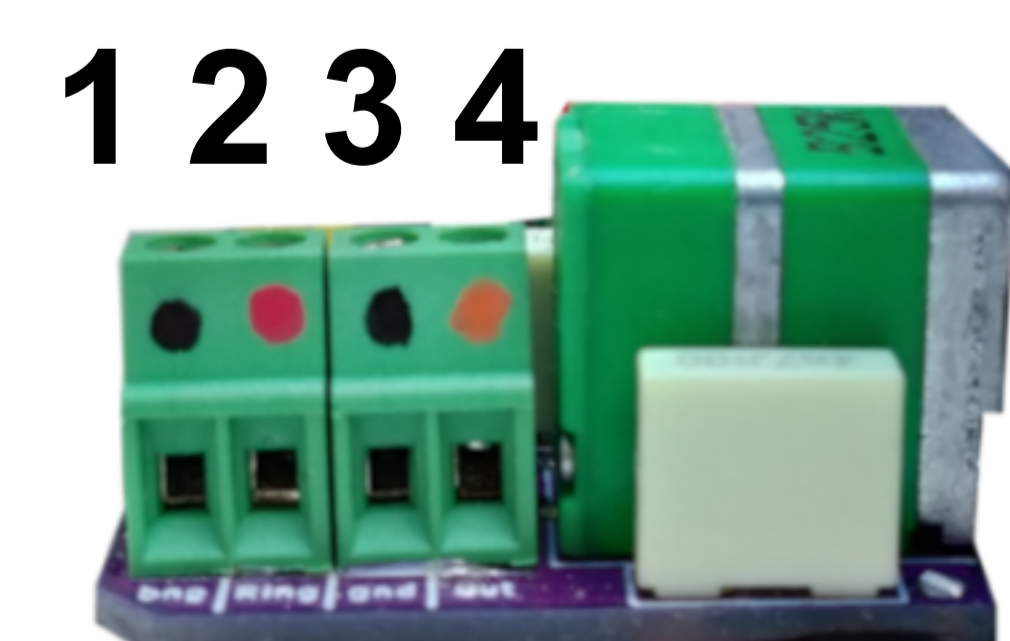

[www.lusithanddevices.com](http://www.lusithanddevices.com)

[nuno@lusithanddevices.com](mailto:nuno@lusithanddevices.com)

**Warranty and Conditions:** Any of our products, that are defective, will be replaced/ fixed and all expenses will be covered once it has been verified that the problem isn't a result of bad handling or negligence on the owners part. If the damage is due to negligence or wrong handling, warranty is lost and a cost can occur for the devices repair (the shipping costs will not be covered on such cases).

Warranty is valid for 2 years after the date of purchase.