



## G3 Top Seal

### Description:

G3 Top Seal by Wagman is a blend of polymer high gloss sealer and lithium silicate densifier. G3 Top Seal is designed to guard polished concrete surfaces while providing a beautiful sheen.

### Features & Benefits:

Excellent for Polished Concrete applications  
Increased abrasion resistance  
Increases long term durability  
Does not yellow or blush  
Will not chip, peel, or flake

### Applications:

Polished Concrete  
Interior slabs on grade  
Elevated slabs  
Decorative Concrete

### Coverage:

1200-2000 square feet per gallon

### Application:

Protect all adjacent surfaces  
Confirm surface is free of dirt, oil or any barrier that will stop product from penetrating  
Apply to dry surface  
Pre-Test a small area to confirm desired results  
Application methods may vary based on jobsite conditions- Typical application is with low pressure sprayer and microfiber pad  
Wet microfiber pad with G3 Top Seal  
Apply in light spray  
Work in with Microfiber  
Maintain a wet edge  
Allow treated surface to dry  
Re-apply to achieve desired gloss/ appearance as needed  
High Speed burnishing is recommended with white pad  
Clean tools and equipment with water

### Packaging:

<u>Volume</u>	
5 Gallons	Pail
55 Gallons	Drum
275 Gallons	Tote


717.854.2120



[info@wagman.us](mailto:info@wagman.us)



WAGMAN G3

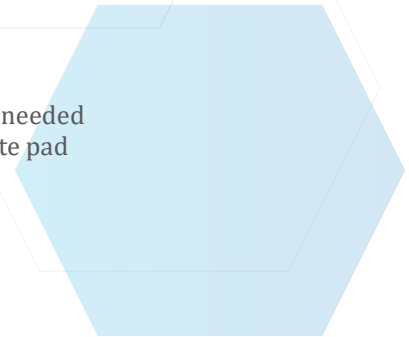

### Storage, Handling, and Transport

Do not allow to freeze  
Transport and store between 40-95 degrees Fahrenheit  
Protect from UV exposure  
Keep container sealed  
Properly stored G3 Top Seal has a shelf life of 12 months

### Technical Support

Technical support is available from the manufacturer. Call 717.854.2120 and ask for G3 technical support.

### Warning & Safety

**KEEP OUT OF REACH OF CHILDREN. DO NOT TAKE INTERNALLY. BEFORE USING THIS PRODUCT PLEASE READ THE ENTIRE SAFETY DATA SHEET. Safety Data Sheets (SDS) are available at [www.wagman.us](http://www.wagman.us) or by request by calling 717.854.2120**

### Warranty

*Wagman Metal Products are warranted to be of uniform quality, within manufacturing tolerances and to meet the technical properties on the current product data sheet. The information is believed to be reliable. This information contained in this bulletin is based on knowledge, experience and testing with the materials used in production of Wagman Metal products. Applicator is responsible for testing material for effectiveness and performance. The application of Wagman products is employed by the customer who is outside the control of Wagman Metal Products. Wagman is not liable or responsible for any loss, damage or injury from the use or application of any Wagman products. Wagman Metal's liability under this product warranty shall be limited to a refund of purchase price or replacement of the product. Wagman Metal shall have no liability for any loss of use, interruption of business, lost profits, or goodwill, or for any special, incidental, or consequential damages of any kind arising from the purchase or use of the warranted product. Any claim made under this warranty must be made within one (1) year of the date of purchase and shall be accompanied by any reports or test results that form the warranty claim. No warranty is made that the use of such information or our product will not infringe upon any patent. No representative or distributor is authorized to make any representation or warranty or assume any other liability on our behalf with any sale of our products. Wagman Metal shall have the right, but not the obligation to conduct site inspections and perform tests pertaining to the claim. Sole remedy shall be replacement of product proven defective.*