

# Model 3100-3P



HP/KW	25/18.6
SWEEP OF DISCS	28" (711 mm)
ABRASIVE PRESSURE	1090 lbs (494 kg)
WIDTH OF MACHINE	29-1/2" (749 mm)
LENGTH OF MACHINE	72-1/4" (1835 mm)
HEIGHT OF MACHINE	52" (1321 mm)
NET WEIGHT	1425 lbs (646 kg)
SHIPPING WEIGHT	1625 lbs (737 kg)
WATER TANK	20 gallon (75,7 L)
POWER CORD (4-4)	100 ft (30,5 m)


## ELECTRICAL OPTIONS

VOLTAGE	230	460	230	460
PHASE	3	3	3	3
DRIVE	MANUAL	MANUAL	VARIABLE	VARIABLE
AMP DRAW	60	30	60	30
BREAKER (AMPS)	80-100	50	80-100	50
STONE HOLDER RPM	510	510	385-600	385-600

- Optimal for jobs exceeding 10,000 sq. ft.
- Despite the weight and size the 3100 can be easily maneuvered by a single person
- Uses Plug Stone Shape, Bolt on to Universal Tool Plate, or Speed Shift System
- Four 42 lbs. Pocket Weights
- Mild Steel or Stainless Steel Guards
- Stainless Steel Water Tank
- Wet/Dry Setup

## PRODUCTION RATES

- Mastic removal rate of 1000 sq. ft. per hour
- Thin-Set removal rates of 1,500 sq. ft. per hour
- Thin-Mil coatings removal of 750 sq. ft. per hour
- Concrete polishing rates of 2,500 sq. ft. per polishing pad per hour (depending on grit)
- Rough Terrazzo rate of 1,500 sq. ft. per day

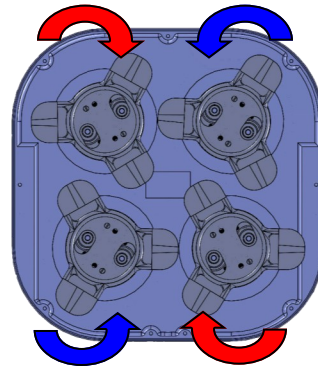

222 1st Avenue NW • Watertown, SD 57201  
 Phone: (605) 882-3888 • Fax: (605) 882-0778  
 Email: info@terrco.com • Website: www.terrco.com

