

SPECIFICATION SHEET

PRODUCT # : EL-CL-650B-AB

•Area Lights

• Cast Brass

Fixture Specifications:



Housing: Corrosion resistant cast brass.
Stem: Solid brass pipe with 1/2" NPT on bottom.
Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process.
Lens: Frosted polycarbonate, cover over lamp providing sprinkler water protection.
Socket: Top grade fixed ceramic bi-pin socket. Easy tool free lamp access.
Lamp: 12V, T3, 20W max.
 Available in LED 5W WARM WHITE

Wiring: Fixture is prewired with a 3-ft 18-2 direct burial cord.

Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes: A remote 12V transformer is required. Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

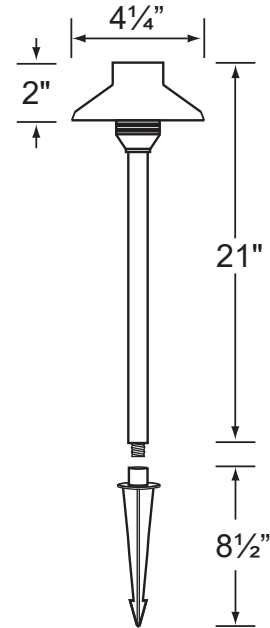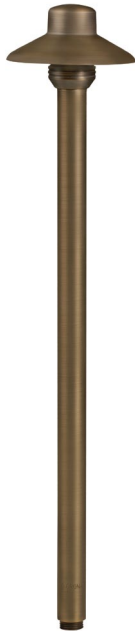

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

JOB INFORMATION

TYPE: _____ DATE: _____
 JOB NAME & ADDRESS: _____
 PRODUCT #: _____
 TOTAL QUANTITY: _____
 LAMP TYPE & WATTAGE: _____
 TRANSFORMER: _____
 CONTRACTOR: _____
 SPECIFIER: _____

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• - **product #** - **lamp** - **wattage**
 EL-CL - 650B-AB - L-EDT3 - 2W-3K

Example: EL-CL-650B-AB-L-EDT3-2W-3K