VEROBOARD.

Model: OTM-VPA60-DIP


Input Voltage:	120-277V AC
Input Current:	0.78A
Frequency:	50-60 Hz
Output Voltage:	3-65V DC
Output Current:	600mA~2100mA
Max Power:	60W
Dimensions L x W x H:	180mm x 62mm x 24.2mm
IP Rating:	IP20 (Dry and Damp Locations)
Dimmable:	Yes (5 in 1 Dimming)
Wiring/Housing:	Hardwire
Class Certification:	Class P
Standards:	cUL/SELV/RoHs

Job Name: ______ Distributor:_____ Type: _____


CULUS SELV ROHS




Installation Diagram (with 0-10V Dimmers)




(with Triac and Phase-cut Dimmers)



(Direct Wiring)



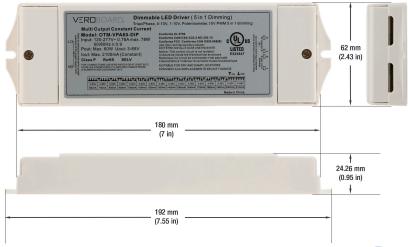



														TON	⊥ off
TTTT	TTTT	TTTT	TTTT	TTTT	TTTT	TTTT	TTTL	TTTT							
3-65V	3-65V	3-65V	3-65V	3-60V	3-54V	3-50V	3-46V	3-43V	3-40V	3-38V	3-35V	3-33V	3-32V	3-30V	3-28V
600mA	700mA	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA	1600mA	1700mA	1800mA	1900mA	2000mA	2100mA

120-277V 60W CLASS P

SKU: 666561433772