


MODEL **CFLEDR06-CC**
NAME **DELTA SERIES**
6" Round Flush Mount

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. Can be installed indoors or out and includes five switch-selectable CCT settings.



PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

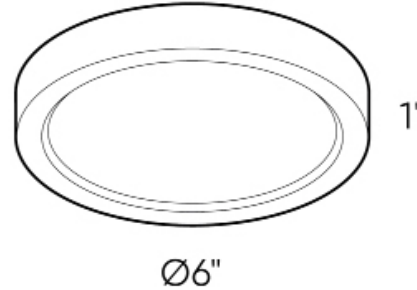


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
6"	11W	700lm	2700K 3000K 3500K 4000K 5000K	90	120V	110°	Straight	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin nickel <input type="radio"/> Gold

*Lumen output measured at 3000K

LIGHT DISTRIBUTION

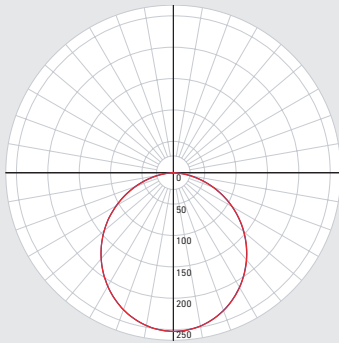

CONSTRUCTION

Lens Frosted	Finish type Paint (BK, WH) Electroplate (SN, BB)	Type of LED Edge lit SMD
Lens material PC	Housing material Cast aluminum	Mounting Twist bracket

RATINGS

Placement Indoor/outdoor	Lifespan 50,000 hrs.	IP rating IP44
Location Wet (Covered ceiling mounted only)	Certifications ETL, JA8, FCC, ES	Operating temperature -20° to 40° C

WHAT'S IN THE BOX

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

ACCESSORIES

-

ADAPTERS

-



**ELECTRICAL
DETAILS**

Input voltage
108-120V

Output current
87mA

Power factor
90%

Driver type
Constant current

Output voltage
126V

LED model #
2835

**THD harmonic
distortion**
<30%

Binning type
3 SDCM

FEATURES

Integrated dimmable driver

Smooth 360° wide spread

Switch-selectable CCT:
2700K / 3000 K / 3500 K /
4000 K / 5000 K

Superior LED performance and lifespan

Minimal heat emission
Edge-lit technology

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	0	100	250
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	99	150
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	98	150
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	92	150
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	98	150
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	91	150
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0	73	300
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 300W Dimmable CFL/LED	Compatible	0	88	300
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	0	98	250
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	0	90	250
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	1	95	150
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	150
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	150
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	150
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0	100	300
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	0	72	450
Legrand	RHL373PW	Triac, 250W LED	Compatible	0	88	250
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	120
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	96	200

* Minimal buzzing noise may occur with some dimmers