

# PRODUCT DATA SHEET



## PRODUCT - DATA

### S329

Ring wooden screw

### S329


#### Technical Data

Casting material : AISI316 - DIN 1.4408  
Production : S329  
Ring - Welded  
Bolt - Cast  
Surface treatment : "E.P." (Electro polished)

Note : Breaking load is described as the load point where welding fails. Deformation load is however lower and is dependent on the diameter of rod and circumference of ring. A general rule is to assume deformation load at around 1/5 of breaking load.



 **S329**  
Ring wooden screw

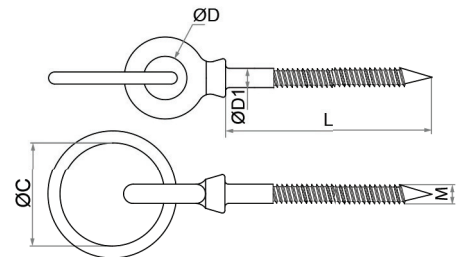

S329	SIZE	ØC (mm)	ØC (inch)	ØD (mm)	ØD (inch)	ØD1 (mm)	ØD1 (inch)	L (mm)	L (inch)	M (mm)	Unit weight (kgs)	Unit weight (lb)	B.L. (kgs)	B.L. (lb)
SS316														
6329-0660	6*60	50	1.97	6	0.24	6	0.24	60	2.36	M6	0.07	0.15	900	1,980
6329-0880	8*80	50	1.97	8	0.31	8	0.31	80	3.15	M8	0.14	0.31	1,600	3,520
6329-0110	10*100	75	2.95	10	0.39	10	0.39	100	3.94	M10	0.29	0.64	2,500	5,500

CODE: S329

KINZI DATA SHEET

**100%**  
**RECYCLABLE**

[WWW.KINZI.COM](http://WWW.KINZI.COM)