

CAMTREE

CAMTREE 1pc. SUN 6 Tungsten LED Fresnel Light

(C-SUN6-TN)

INSTRUCTION MANUAL



All rights reserved

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

IT IS IMPORTANT THAT YOU READ AND UNDERSTAND THIS GUIDE BEFORE ATTEMPTING TO ASSEMBLE OR USE YOUR NEW CAMTREE SUN 6 TUNGSTEN FRESNEL LIGHT. SHOULD YOU NEED ADDITIONAL INFORMATION, TECHNICAL ASSISTANCE IS AVAILABLE 'ON LINE' BY CONTACTING YOUR SALES REPRESENTATIVE.

INTRODUCTION

Translating the chaos of the real world into breathtakingly simple, beautiful shots can often seem like an impossible task. Results are spectacular with our CAMTREE SUN 6 Tungsten LED FRESNEL LIGHTS. It's an amazing LED lighting for you that can spot focus and go flood with a simple turn of a knob. Camtree Fresnel Studio LED lights deliver picture-perfect results in a lightweight package with stellar image quality.

WHAT'S IN THE BOX


Please inspect the contents of your shipped package to ensure you have received all that is pictured and listed below. The gray foam shipping /storage container has been especially designed to protect your purchase while in transit and is a good place to keep your **CAMTREE Sun 6 Tungsten Fresnel Light** when not in use.

CONTENTS OF SHIPPING BOX

- 1 x Camtree Sun 6 Tungsten LED Fresnel light
- 1 Set Barn Doors
- 2 x Gel Filters
- 1 x 24V AC Adaptor
- 3 x Adapters



24V AC Adapter

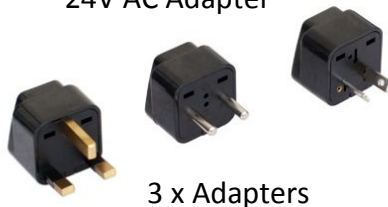

3 x Adapters



2 x Gel Filters



Sun 6 Tungsten Light
with Barn Doors

**Caution : AVOID direct sight into the Flashlight**


- Remove the head from its container and mount it on to the 3/8" standard spigot located on the top of the riser unit of your stand. Tighten the lock knob to secure the head to the stand.
- You will note that on the yoke that holds the fixture head to the riser spigot has a control knob that is used to adjust the desired angle of the light. Loosen the knob to make the adjustment and then re tighten to lock the angle in place.
- Connect the power source to the head but do not power up as yet. Determining power cord runs from the light to available power should be done prior to powering on.
- **Dimming Control Knob** is provided to control 100% to 10% dimming with no noticeable color shift or flicker.



- **Flood to Spot Light Controller Knob** provides continuously Flood and Spot lighting with beam control from 15% to a 85% spread.




- Now insert the barn doors into the provided barn door holder as shown in image.

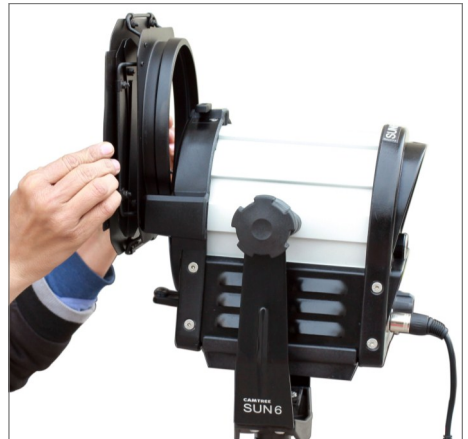

- 2 types of gel filters are provided for each light and are easily inserted with the provided gel holders. The use of gels provides the operator an artistic lighting environment for creative control.



- Now slide the provided lever above the gel filter and barn doors to secure properly.

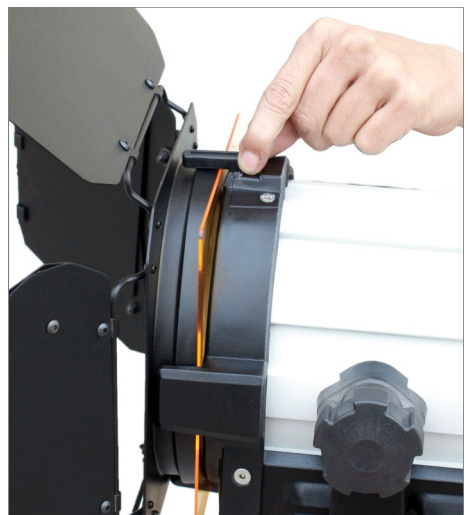

- Power up the system, adjust the stand for desired height, adjust intensity by use of the dimmer control, check exposure and camera functions and you should be good to go.


YOUR CAMTREE 1PC SUN 6 TUNGSTEN LED FRESNEL LIGHT ALL DRESSED UP AND GOOD TO GO



SPECIFICATIONS

- Color Temperature : 3200K
- Beam Angle : 85° to 15°
- LED Fresnel Lens : 6" / 15.24cms.
- Size : 11 x 10.5 x 18" / 28 x 27 x 46cms.
- Weight : 3.640kgs.
- Maximum Power Draw : 100W
- Power Requirements : 24VDC / 100-240VAC
- Power Supply : AC / DC 120-240VAC, DC Power via 4-pin XLR

LUX

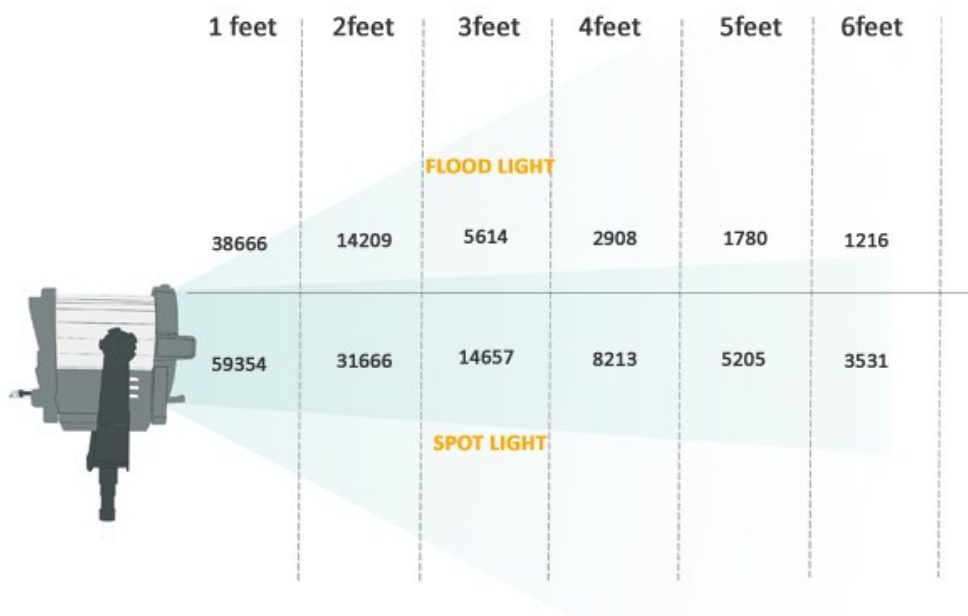

SAFETY PRECAUTIONS

- Read and understand all instructions before using any item in the kit.
- Do not let children play with the lights or battery.
- Never leave lights 'on' unattended.
- Never operate the lights or battery charger with a frayed power cord.
- Use only heavy-duty extension cords similar to those supplied. Smaller-gauge cords could over heat (and also waste more power).
- When using the lights on house hold AC current, position the connecting extension cords so the lights or stands will not be pulled over.
- Do not place lights near any flammable materials (such as curtains), or close to any material likely to be damaged by heat.
- Always unplug cords from the electrical outlets and allow lights to cool prior to cleaning or servicing lights. Always remove cords by grasping the plug—not the cord.
- Lights become hot in use. Do not touch them until they have been off and allowed to cool for several minutes.
- If any liquids are spilled on a light, first unplug the power. When the light cools, dry the wet areas with an absorbent cloth or use a hair dryer to remove moist.

WARRANTY

We offer a one year warranty for our products warranty from the date of purchase.

We will repair or replace your product, free of charge, in the event of a defect in materials or craftsmanship obtained during normal use or handling based on the user manual. Please note that we will not cover any shipping costs for returning the product to us. If any VAT or import duties are applied to the return, we will also charge these costs to the customer.

The warranty does not include, by the way of example, damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product , or service by anyone other than our company.

We are not liable for incidental or consequential damages resulting from the use of the unit or occurring due to any breach of this warranty.

Replacement parts of the product will be provided at nominal cost (covering the cost price of the replacement parts only) to the customers after the Warranty Period has expired. We will cover the complete cost of sending replacement parts within the warranty period. After that, Nominal cost of the product & Actual shipping cost will be charged.

Do not send the unit to us without first getting a response and getting the approval to send back the item.

In case of any kind of dissatisfaction, we urge you to Contact us immediately and we shall do our best to help you out.

For any other assistance you can reach us via email.