




# 72612B - 6" SURFACE MOUNT DISK LIGHT

COLOR SELECTABLE 15W

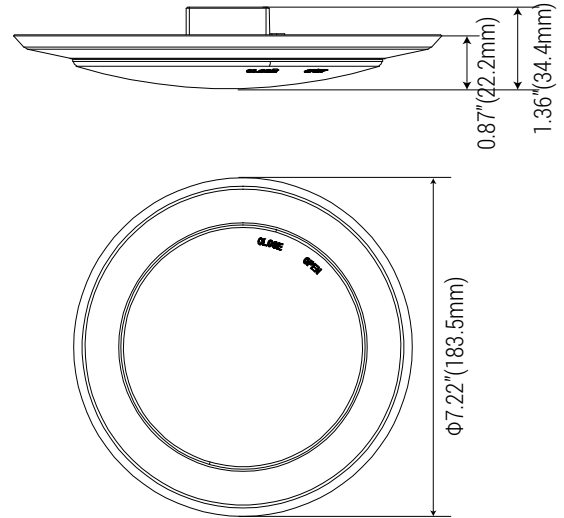

### FEATURES:

- 5 Color Selectable: 2700K, 3000K, 3500K, 4000K, 5000K
- Supports surface mounting and retrofit installation
- High quality Iron shell with frosted PC diffuser
- Wet-location rated, ideal for bathrooms, laundry, porches and garage work rooms
- Built with the highest quality 120V drivers, ensuring energy efficiency
- Low profile, no flicker
- With multiple apertures, can be installed into any 5 or 6 inch recessed can, or any 3.5 inch junction box
- cETLus Listed, Energy Star Listed
- Compatible with most triac dimmers
- 50,000+ hours LED Life Expectancy
- E26 adapter & spring clips included
- Title 24/JA8 Compliant for High Efficacy LED Lighting in California

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Lumens/Watt	Energy Star
72612B	White	15W	1126	2700/3000/ 3500/4000/ 5000K	120V	≥90	75	Yes



# 72612B - 6" SURFACE MOUNT DISK LIGHT

COLOR SELECTABLE 15W

## TECHNICAL SPECIFICATIONS:

**VOLTAGE:** 120V

**POWER FREQUENCY:** 60 Hz

**POWER FACTOR:** > 0.9

**5 CCT:** 2700K/3000K/3500K/4000K/5000K

**CRI:** 90

**BEAM ANGLE:** 120 Degrees

**LIFESPAN:** >50,000 Hours

**OPERATING TEMP:** Minimum Starting -4° - 113° F

**DIMMABLE:** Triac dimming - Continuous dimming from 100% to 5% with many Triac Dimmers.

**RATING:** Suitable for wet locations - IP43

### WARRANTY:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

## CONSTRUCTION:

**HOUSING:** High quality iron shell with frosted PC diffuser, white finish.

**IP-RATING:** IP43 Wet Indoor Location Rated

**LENSMATERIAL:** Adjustable Frosted Polycarbonate Lens

**MOUNTING:** With multiple apertures, can be installed into any 5 or 6 inch recessed can, or any 3.5 inch junction box.

**LISTINGS:** cETLus, Energy Star, Title 24/JA8 Compliant

## CARTON QTY: 24

N.W. : 6.0 KGS

G.W. : 7.6 KGS

CBM : 0.037

## FLIP THE SWITCH TO CHOOSE DESIRED CCT

