





72643B - 6" J-BOX DOWNLIGHT

BAFFLE 15W 27/3/35/4/5K 100-277V



CCT Select

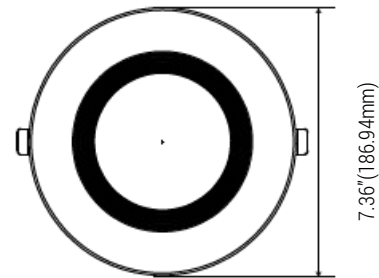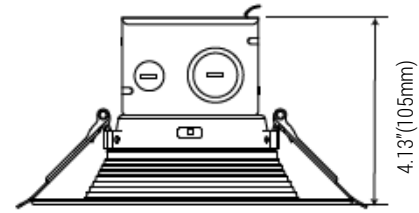

FEATURES:

- Color Selectable:
2700K/3000K/3500K/4000K/5000K
- Baffle Trim
- 100-277V
- Includes integrated junction box - quick and easy install
 - Retrofits in existing incandescent can housing
- Wet Location Rated - Ideal for retail lighting, commercial, residential, kitchen, bathroom, etc.
- IC Rated for safe contact with insulation
- Suitable for new construction
- cETLus & Energy Star Listed
- 5 Year Warranty
- Title 24/JA8 Compliant for High Efficacy LED Lighting in California

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	CRI	Lumens/Watt	Energy Star
72643B	White	15W	1,135	2700/3000/ 3500/4000/ 5000K	100-277V	≥90	76	Yes



72643B - 6" J-BOX DOWNLIGHT

BAFFLE 15W 27/3/35/4/5K 100-277V

TECHNICAL SPECIFICATIONS:

VOLTAGE: 100-277V

POWER FREQUENCY: 60 Hz

POWER FACTOR: > 0.9

5 CCT: 2700K/3000K/3500K/4000K/5000K

CRI: 90

BEAM ANGLE: 100 Degrees

LIFESPAN: >50,000 Hours

OPERATING TEMP: Minimum Starting -4° - 113° F

DIMMABLE: Triac dimming (120V only).

Compatible with most triac dimmers to give user a smooth 100%-5% dimming to choose the desired brightness.

RATING: Suitable for wet locations

WARRANTY:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

CONSTRUCTION:

HOUSING: High quality aluminum shell with frosted PC diffuser, white finish.

IP RATING: Wet Indoor Location Rated

LENS MATERIAL: Adjustable Frosted Polycarbonate Lens

MOUNTING: Retrofits in existing incandescent can housing. Simply connect the junction box wiring on the back of the recessed downlight to your light switch and place it into your ceiling.

LISTINGS: cETLus, Energy Star, Title 24/JA8 Compliant

ACCESSORIES INCLUDED:

Wire Nuts, Hole Cut Out Card

N.W.: 350g