



Installation Guide



Sprinter Rear Tire Carrier SP1104B

All Flatline Van Co products must be properly assembled and secured before attaching to your vehicle. Improper attachment could result in an automobile accident, and could cause serious bodily injury or death to you or to others involved. You are responsible for assembling and securing Flatline Van Co products to your vehicle, checking the mounting points and attachments prior to use, and regularly inspecting the products for wear and or damage. We always recommend you use a professional to install any aftermarket accessories to your vehicle. If you have no mechanical experience and are not thoroughly familiar with the installation procedures, you must have the product installed by a professional installer or other qualified persons. The responsibility is yours and must be taken seriously for everyone's safety.



thanks.


THANK YOU!

ARE YOU EXCITED ABOUT YOUR NEW TIRE CARRIER? HERE ARE A FEW THINGS TO DO BEFORE BEGINNING THE INSTALLATION PROCESS--


- PLEASE INSPECT THE PRODUCT TO ENSURE THERE WAS NO DAMAGE INCURRED DURING SHIPPING.
- IF THERE IS DAMAGE TO REPORT, PLEASE CONTACT OUR CUSTOMER SERVICE DEPARTMENT AS SOON AS POSSIBLE.
- NEXT, USING THE "PACKAGE CONTENTS" PAGE, CHECK INVENTORY AND FAMILIARIZE YOURSELF WITH THE PARTS AND HARDWARE.
- GATHER ALL TOOLS REQUIRED FOR INSTALL.
 - 9/16 BOX WRENCH
 - 9/16 DEEP SOCKET
 - 3/4 BOX WRENCH OR SOCKET
 - 7/32 HEX KEY ALLEN WRENCH
 - 5MM HEX KEY ALLEN WRENCH
 - 3/16 DRILL BIT
 - 1/4 DRILL BIT
 - 3/8 DRILL BIT
 - POWER DRILL
 - RED LOCTITE**

ESTIMATED INSTALL TIME- 2 HRS

ADDITIONAL HELP IS SUGGESTED FOR A FEW OF THE INSTALL STEPS.

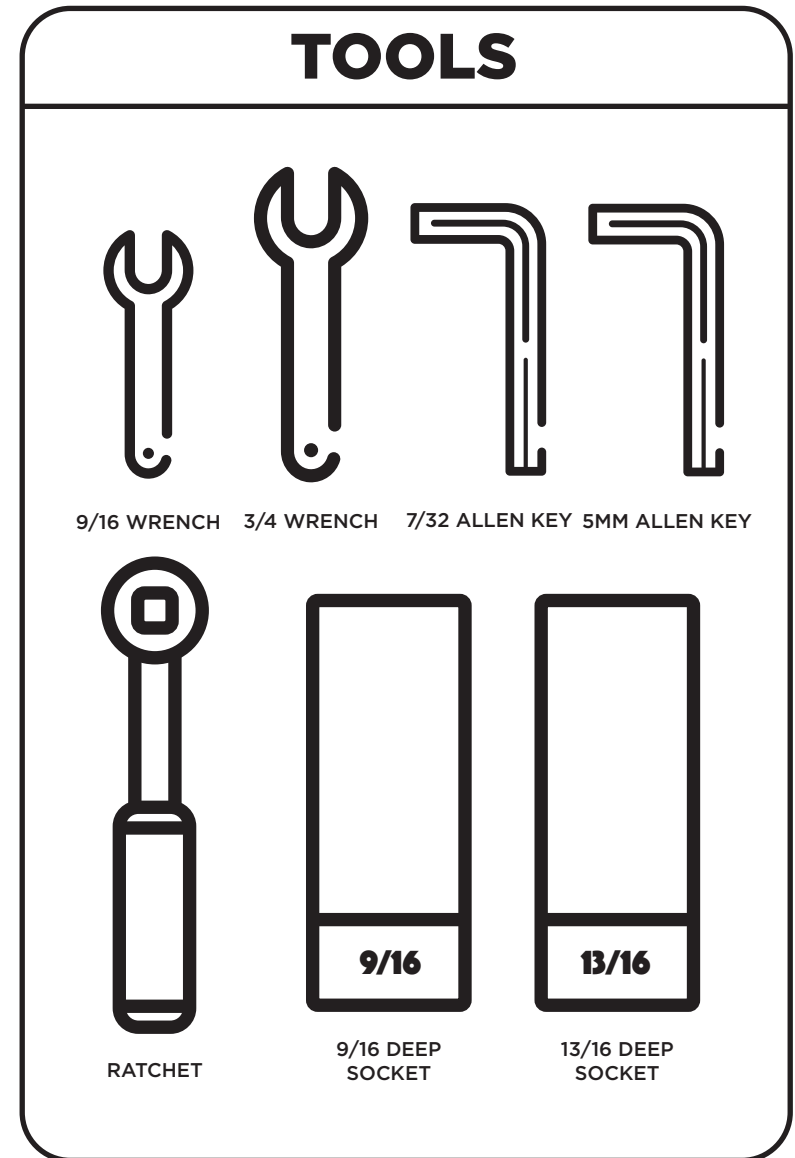


PACKAGE CONTENTS

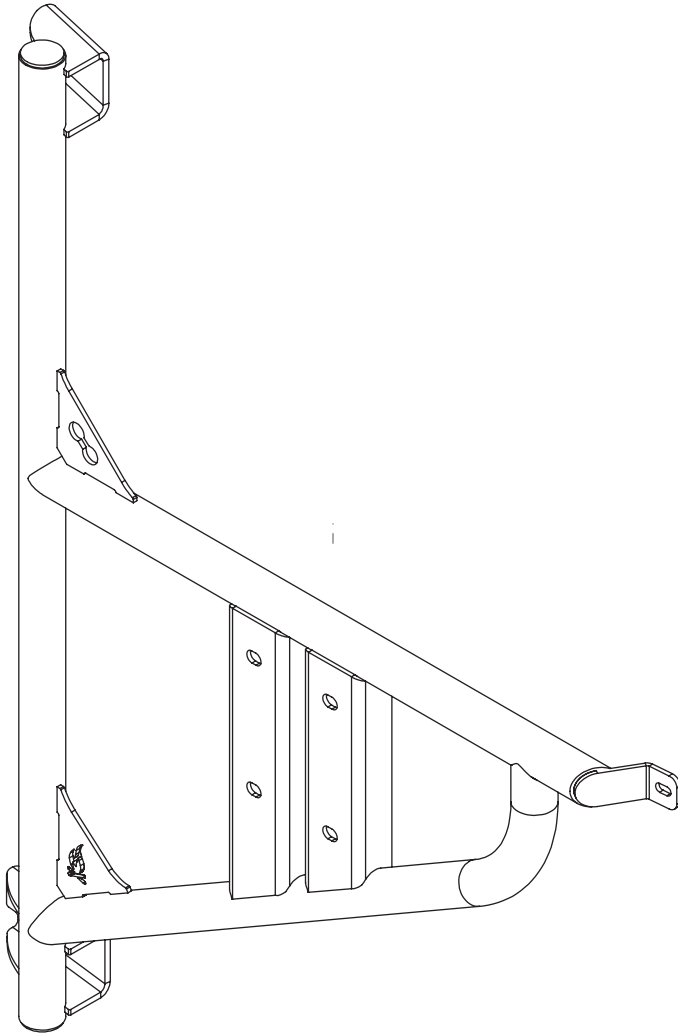


TIRE CARRIER FRAME

QTY - 1



WHEEL BRACKET

QTY - 1




DRILL TEMPLATE

QTY - 1



BACKER PLATE

QTY - 2



LOCK ROD

QTY - 1



LOWER HINGE BACKING PLATE

QTY - 1



UPPER HINGE BACKING PLATE


QTY - 1




DOOR MOUNTING BOSS

QTY - 1


HARDWARE




3/8-16 X 2.25 BUTTON HEAD
HEX DRIVE SCREW
QTY - 1




3/8-16 X 1.5 HEX DRIVE
BUTTON HEAD SCREW
QTY - 4




1/2-13 X 1.5 SQUARE NECK
CARRIAGE BOLT
QTY - 4




3/8-16 X 1 HEX HEAD SCREW
QTY - 2



M14-1.5 X 65 WHEEL STUD
QTY - 3




5/8 SCREW WEATHER
RESISTANT SEALING
WASHERS
QTY - 1



1/2 SCREW FLAT WASHER
QTY - 4



3/8 SCREW FLAT WASHER
QTY - 3




1/2-13 NYLON INSERT
LOCKNUT
QTY - 4




3/8-16 FLANGED NYLON
INSERT LOCKNUT
QTY - 5




0.787 I.D. SNAP IN PANEL
PLUG
QTY - 1



MULTIDIAMETER DRILL BIT
QTY - 1



M14-1.5 LUG NUT
QTY - 3



LUG NUT KEY
QTY - 1

LET'S GET STARTED!

1. FIRST STEP IS TO REMOVE YOUR INTERIOR DOOR PANEL AND ANY THING THAT MAY BE IN THE WAY, LIKE INSULATION, ETC.

NOTE- YOU MAY HAVE ANY NUMBER OF DIFFERENT DOOR CONFIGURATIONS- STOCK FULL TRIM, STOCK HALF TRIM, STOCK PANEL, UPHOLSTERED WOOD, ETC. EACH REQUIRE THEIR OWN REMOVAL METHOD. PLEASE NOTE THAT THE PANEL STYLE TRIMMED DOOR REQUIRES ADDITIONAL DRILLING AND THE USE OF THE PROVIDED PANEL PLUG.

2. NEXT WE'LL START DRILLING THE THIRD MOUNT HOLE INTO THE DOOR OF THE VAN. THIS IS A MULTI-STEP PROCESS.

- A. GRAB THE PROVIDED TEMPLATE TO MARK THE LOCATION OF YOUR HOLE AS SHOWN IN **FIGURE 1**. THE TOP AND RIGHT SIDE OF THE TEMPLATE ALIGN WITH THE BODY LINES OF THE VAN AS SHOWN. MARK YOUR HOLE, THEN PROCEED WITH DRILLING A 3/16" PILOT HOLE.

- B. IF YOU HAVE THE PANEL STYLE DOOR TRIM, AT THIS POINT YOU NEED DRILL THROUGH AGAIN USING A 1/4" OR SIMILAR BIT THAT IS LONG ENOUGH TO REACH TO THE SHEET METAL ON THE BACKSIDE OF THE DOOR (SEE **FIGURE 2**) THEN DRILL THE HOLE ON THE **INSIDE** OF YOUR DOOR TO 7/8" TO FIT THE PANEL PLUG. THIS HOLE IS SIZED TO FIT A 9/16 DEEP WELL SOCKET TO MAKE FASTENING EASIER.

NOTE- SKIP THIS STEP IF YOU HAVE THE OPENING ON THE INSIDE OF YOUR DOOR AS SEEN WITH FULL AND HALF TRIM DOORS. SEE OUR INSTALL VIDEO FOR THIS PRODUCT FOR MORE INFO.


- C. DRILL THROUGH ALL WITH THE 3/8" DRILL BIT
- D. USING THE STEP BIT, DRILL THE OUTSIDE HOLE ON YOUR DOOR OUT TO 5/8" TO FIT THE DOOR MOUNTING BOSS (DO NOT INSTALL YET)

NOTE- WE LIKE TO MARK THE STEP BIT AS SHOWN BELOW TO AVOID DRILLING TOO FAR.

FIGURE 1



FIGURE 2

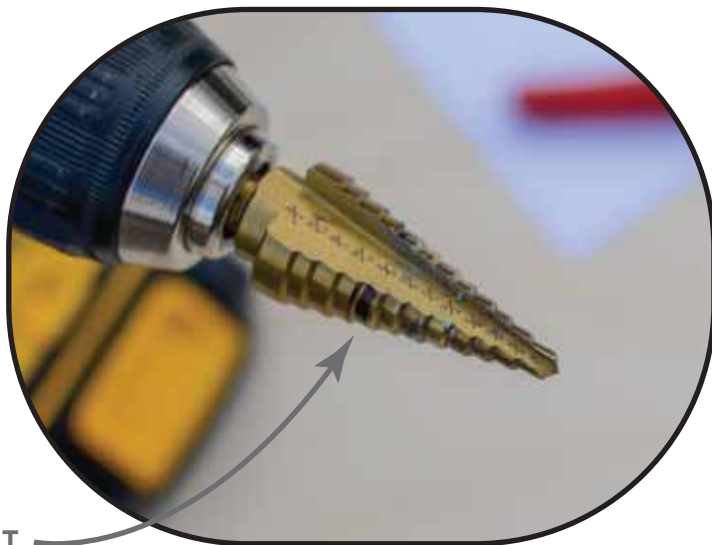

MARK BIT

FIGURE 3

3. NOW YOU CAN BEGIN ASSEMBLING THE TIRE CARRIER. ATTACH THE WHEEL BRACKET TO THE TIRE CARRIER FRAME AS SHOWN IN **FIGURE 3** USING THE (4) **1/2-13 X 1.5 SQUARE NECK CARRIAGE BOLTS**, (4) **1/2 SCREW FLAT WASHERS**, AND (4) **1/2-13 NYLON INSERT LOCKNUTS**. ENSURE THAT THE (2) **BACKER PLATES** ARE INSTALLED BENEATH THE CARRIAGE BOLTS AS SHOWN IN **FIGURE 3**. TIGHTEN THIS DOWN.

NOTE-

4. **OPTIONAL STEP-** SINCE WE PROVIDE LOCKING LUG NUTS, YOU DO NOT NEED TO INSTALL THE LOCK ROD UNLESS YOU WANT THE EXTRA PROTECTION. LEAVING IT UNINSTALLED PROVIDES A CLEAN LOOK IF YOU HAVE COOL CENTER CAPS FOR YOUR WHEELS. IT CAN ACCEPT VARIOUS LOCKS, BUT OUR FAVORITE IS A TRADITIONAL HITCH LOCK.

TO INSTALL- INSERT INTO THE WHEEL BRACKET AS SHOWN BELOW AND FASTEN USING THE (2) **3/8-16 X 1 HEX HEAD SCREW**, AND (2) **3/8 SCREW FLAT WASHER**. THE DEPTH IS ADJUSTABLE TO SUIT YOUR SPECIFIC WHEEL SETUP. ENSURE IT STICKS OUT ENOUGH FOR THE LOCK TO HAVE CLEARANCE WITH YOUR WHEEL INSTALLED.


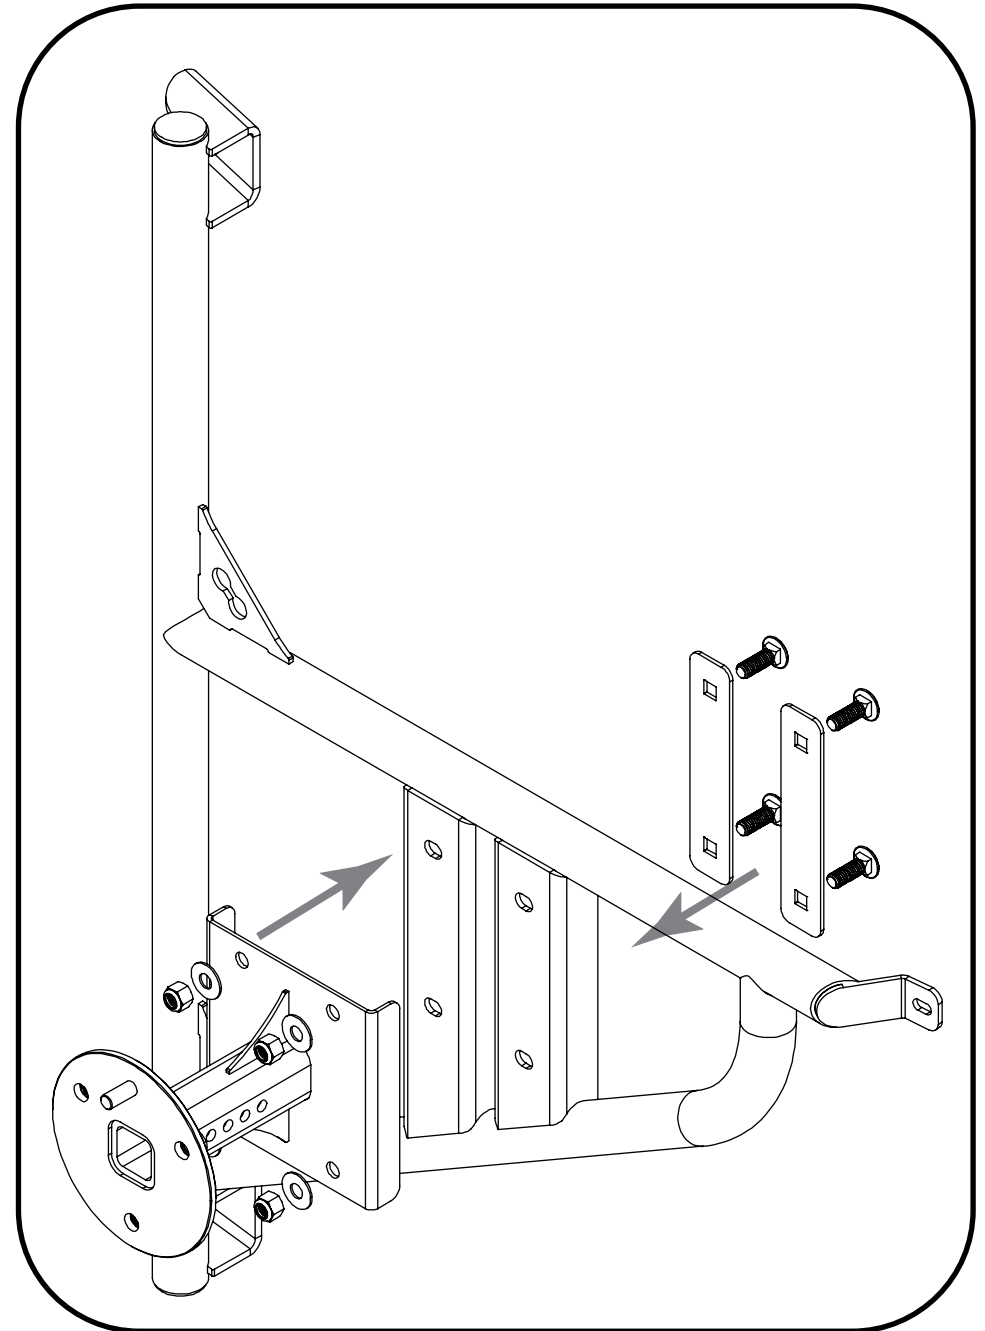



FIGURE 4

5. NOW SLIDE THE 5/8 SCREW WEATHER RESISTANT SEALING WASHER ONTO THE DOOR MOUNTING BOSS AND PRESS INTO THE DOOR AS SHOWN IN **FIGURE 4**.


6. THE NEXT FEW STEPS WILL REQUIRE A SECOND PERSON TO HELP OUT. GRAB BOTH THE **HINGE BACKING PLATES** AND (4) **3/8-16 X 1.5 HEX DRIVE BUTTON HEAD SCREW** AND INSERT THEM INTO THE DOOR AS SHOWN BELOW. ONE PERSON WILL NEED TO HOLD THESE IN PLACE FOR THE SECOND PERSON TO PERFORM THE NEXT STEP.

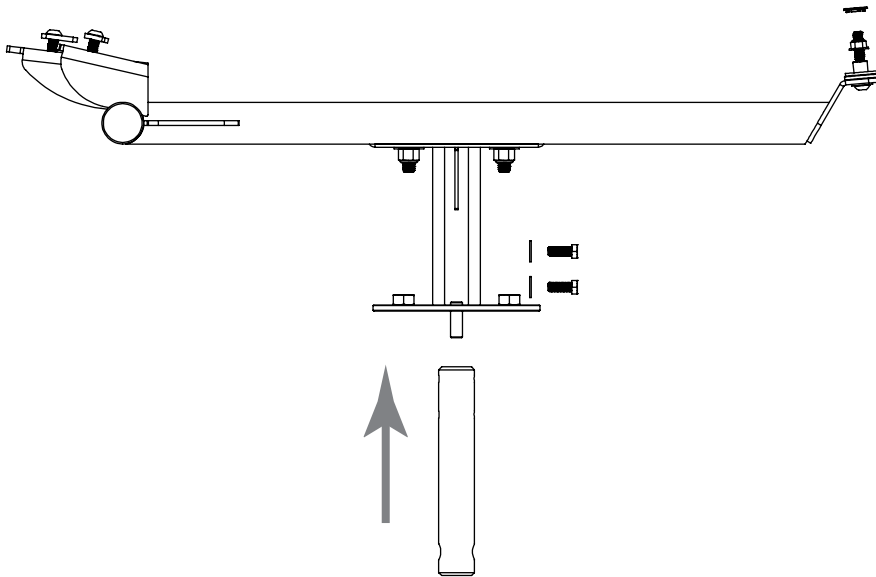

TOP HINGE

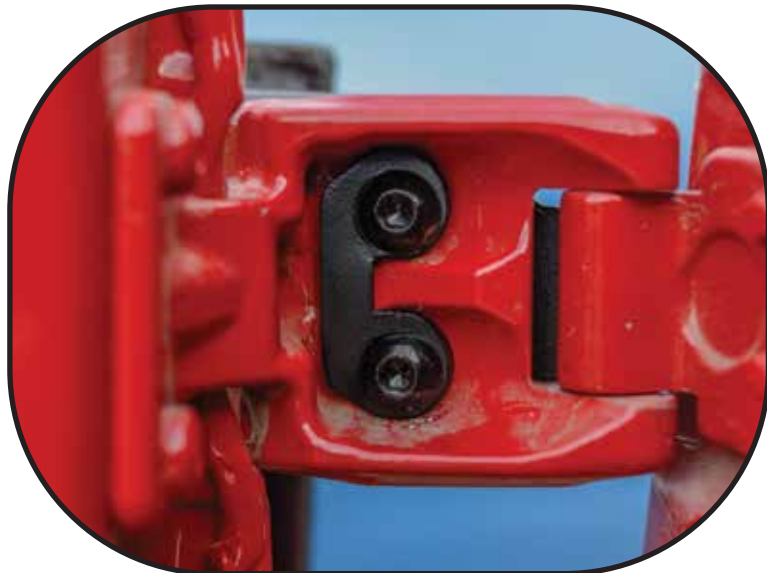

BOTTOM HINGE

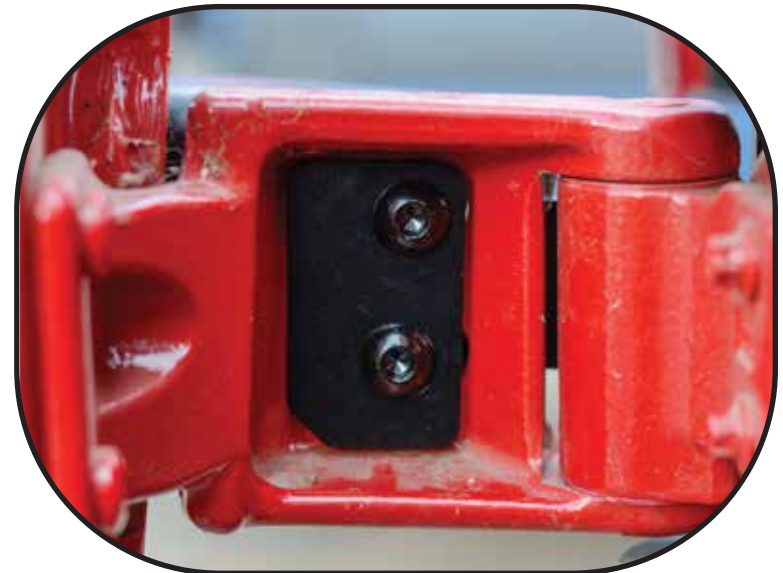

7. WHILE SOMEONE HELPS TO HOLD HINGE BACKING PLATES AND HARDWARE IN PLACE, FIRST INSERT THE **3/8-16 X 2.25 HEX DRIVE BUTTON HEAD SCREW** AND **3/8 SCREW FLAT WASHER** THROUGH THE 3RD MOUNT OF THE TIRE CARRIER AND INTO THE **DOOR MOUNTING BOSS** AS SHOWN IN **FIGURE 5**. THEN FIT THE TIRE CARRIER ON TO THE PROTRUDING HARDWARE ON THE HINGES OF THE VAN AND SECURE WITH (4) **3/8-16 FLANGED NYLON INSERT LOCKNUTS**. LEAVE THESE A LITTLE LOOSE TO ALLOW MOVEMENT OF THE TIRE CARRIER FOR ALIGNMENT.

***NOTE-** THIS STEP IS TRICKY AND REQUIRES A BIT OF JUGGLING BETWEEN THE TIRE CARRIER FRAME AND REQUIRED HARDWARE.*

FIGURE 5



INSERT THIS HARDWARE FIRST



8. FASTEN THE REMAINING **3/8-16 FLANGED NYLON INSERT LOCKNUT** INSIDE THE DOOR (**FIGURE 6**) AND THEN PROCEED WITH ALIGNING THE TIRE CARRIER. ALIGN WITH THE DOOR/WINDOW BODY LINES AS SHOWN IN **FIGURE 7**. CAREFULLY OPEN THE DOOR AND ENSURE THAT THE DOOR STOP ON THE LOWER HINGE BRACKET ENGAGES THE FACTORY BUMP STOP. NOW TIGHTEN ALL FASTENERS ON THE HINGES AND INSIDE DOOR.
- NOTE-** MORE DETAIL ON BUMP STOP IN OUR INSTALL VIDEO FOR THIS PRODUCT.

FIGURE 6




FIGURE 7



9. NOW WE NEED TO GET READY TO INSTALL THE WHEEL. GRAB THE **WHEEL STUDS** AND **LUG NUTS**. APPLY **RED LOCTITE** TO THE **WHEEL STUDS** ON THE SHORT END OF THE STUD AND SCREW INTO THE **WHEEL BRACKET**. TIGHTEN WITH 5MM ALLEN KEY.
10. LIFT YOUR WHEEL ONTO THE CARRIER AND FASTEN DOWN THE **LUG NUTS** USING THE SUPPLIED **LUG NUT KEY**. YOU WILL NEED A **13/16 SOCKET** TO TURN THE **LUG NUT KEY**. ENSURE THEY ARE TIGHTENED WELL, AND THEN YOU ARE READY TO HIT THE ROAD!




APPLY LOCK-TITE AND
INSERT THIS END



DRILL TEMPLATE

MUST PRINT AT 100% SCALE TO ENSURE ACCURACY

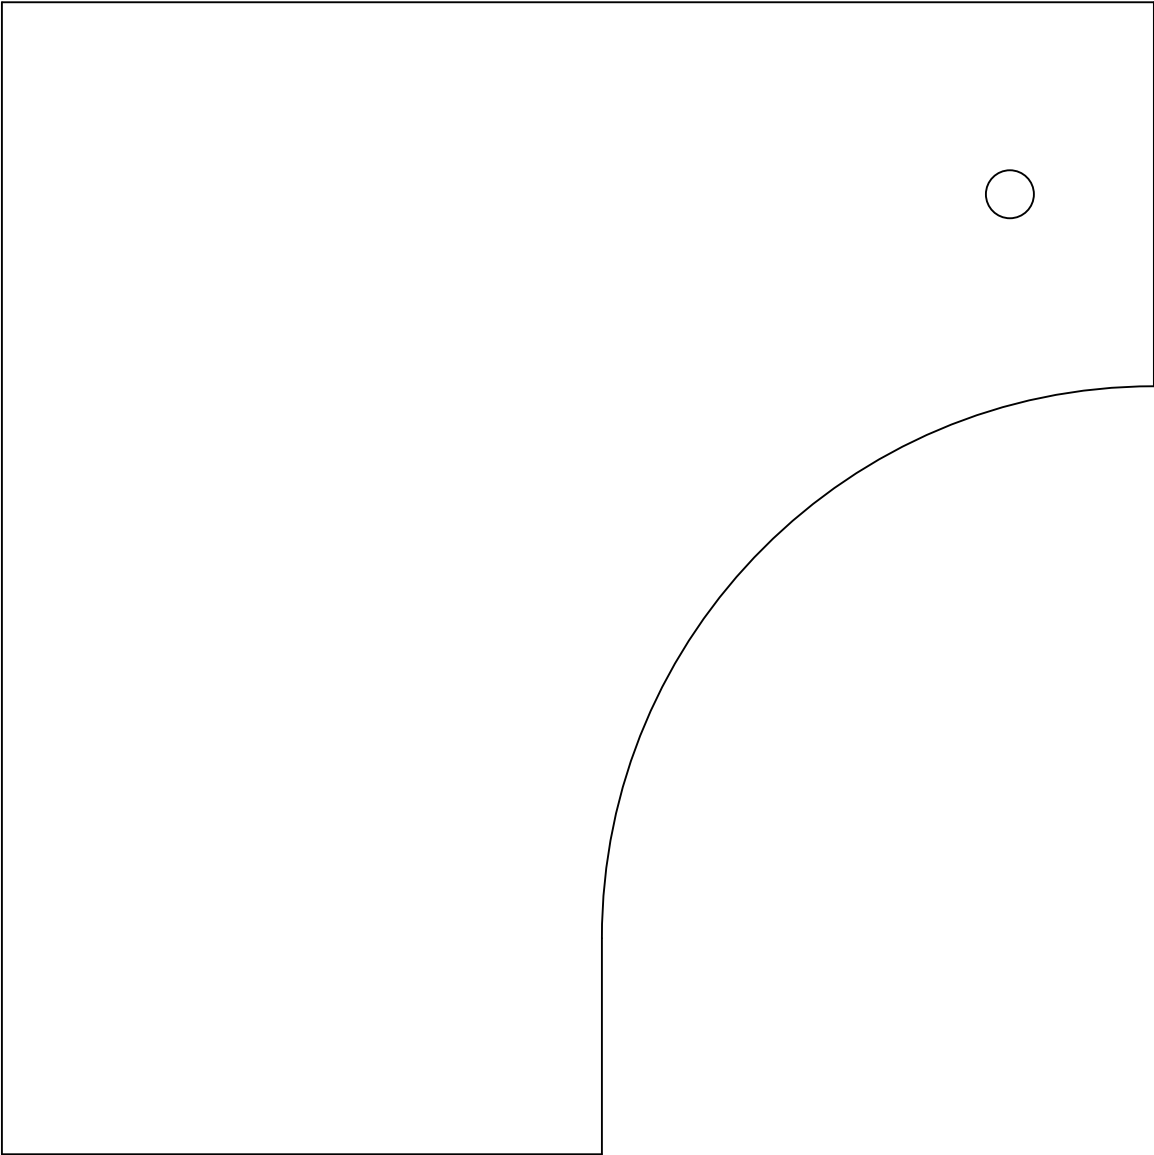

GET OUT AND EXPLORE!

LEAVE US A REVIEW

Happy with your new FVC product? We would love to hear (and see) from you! Head to the product page and click "Leave Review." Add a short review and upload a few photos to be showcased on the product page.

SHARE YOUR PHOTOS WITH US

We love seeing how our customers use their FVC products and following along with your adventures. Tag us in your photos with @flatlinevanco or send them to us via email. We love posting customer pictures in our feed!

CUSTOMER SUPPORT

If you are having any issues with your product, please reach out, and we will make it right. FVC is a company of van and outdoor enthusiasts that design and use our own products, so we want you to be as stoked on your new parts as we are!



@flatlinevanco



facebook.com/flatlinevanco



youtube.com/c/flatlinevanco



support@flatlinevanco.com



thanks!