

Technical Specifications Model Assault II LW Type III Ballistic Shield





Part Number	Size	Coverage	Weight	Thinness	
10" Horizontal Handle					
1362597	16" W x 30" L (50.8cm x 91.4cm)	382 in ² (2,465 cm ²)	14.8 lbs. (6.71 kg)	0.578" (14.7mm)	
FoxFury® B70 Integrated Horizontal Handle 1200 Lumens					
1362598	16" W x 30" L (50.8cm x 91.4cm)	382 in ² (2,465cm ²)	16.4 lbs. (7.44 kg)	0.578" (14.7mm)	
3P Handle					
1362599	16" W x 30" L (50.8cm x 91.4cm)	382 in ² (2,465 cm ²)	16.6 lbs. (7.53 kg)	0.578" (14.7mm)	

NIJ Standard 0108.01 with NIJ0101.06 Shot Protocol Type III

UHMWPE Composite

Ultra-lightweight PE material with chemical resistant characteristics

Structure - Flat

Ambidextrous Handle

Viewport Design

Glass/Polycarbonate

Size - 5" L x 7" W (12.7 cm x 17.8 cm)

Trapezoid Viewing area for increased vertical visibility

Standard Accessories

Forearm Pad

Forearm Strap

SAFARILAND*

COC 31 roducion

1001817 - POLICE Decal - 13" L x 4" W (33 cm x 10 cm)

1001818 - SHERIFF Decal - 13" L x 4" W (33 cm x 10 cm

Optional Accessories

1184578 - Shield Support Hook Attachment

1002756 - Shield Carry Bag 26x36 tall

1002757 - Shield Hood - Medium 13.5x23

1355021 – Assault Viewport Lens 3 Layer Tear Off Kit

1186181 - FoxFury® Taker B50™ Light w/ 1000 Lumens

1314778 - FoxFury® Taker B30™ Light w/ 1000 Lumens

1314777 - FoxFury® Taker B10™ Light w/ 380 Lumens

BALLISTIC PERFORMANCE


Includes Bolts and Viewport being shot.

Tested Rounds	6 Impacts minimum			
5.56 x 45mm, 55 gr. M193	3200 fps ± 30 fps (975 m/s ± 9 m/s)			
7.62 x 39mm, 123 gr. Mild Steel Core	2380 fps ± 30 fps (725 m/s ± 9m/s)			
7.62 x 51mm, 147 gr. NATO (M80)	2750 fps ± 50 fps (838 m/s ± 15 m/s)			
SHOT LOCATIONS				
• 1 - Viewport				
2 - Transition shot between viewport and ballistics				
• 3 - Bolt – Direct Hit				
4 - Bolt – Side of Bolt – down the threads of the bolt				
• 5 - 100mm (3.94") – 3 shot cluster				
6 - 3 shots in a direct line				
Shots 1 and 2 are the outside shots (6-1 and 6-2)				
Shot 3 is in between these two shots (6-3)				
• 7 - 30-degree angle shot				
• 8 - 1" edge shot				

(see diagram below for shot locastions)

🗲 SAFARILAND'

Diagram for Shot Locations.

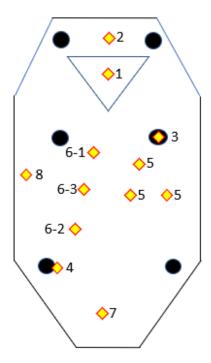

WARNING
WARNING: This product can expose you to chemicals including Methylene chloride, BPA, Lead, Acrylonitrile, Ethyl Acrylate, Formaldehyde, or Methanol, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

SAFARILAND®