


Kit Includes:

1X	Mounting Bracket	CFK071973
IA		
2X	M6 X 16mm Bolts	CBOLM60008
2X	M5 X 12 _{mm} Bolts	CBOLM50003
2X	Rubber Grommets	CGROM60001
2X	M6 X 8 _{mm} Steel Collars	CSPAM60004
1X	M6 Steel Washer	CWASM60001
2X	M5 Plastic Washers	CWASM50001

- Firstly remove the OEM Chainguard. The OEM bolts removed here are not used in the assembly of the Pyramid Hugger.
- Remove the rear most mounting point of the brake hose guide situated on the right-hand side of the swingarm. The **Mounting Bracket** fits underneath this brake hose guide, (see **Fig 2**) be sure to place the **M6 Steel Washer** inside the mounting point (marked **RED** in **Fig 2**) before refitting the brake hose guide on top of the **Mounting Bracket**. This prevents the OEM bolt from crushing the brake hose guide.
- Attach the Pyramid Hugger & Mounting Bracket using the 2X M5 X 12mm Bolts & 2X M5 Plastic Washers.
- Finally fit the chain guard side of the Pyramid Hugger using the 2X M6 X 16mm Bolts, 2X M6 X 8mm Steel Collars & 2X Rubber Grommets. It is always advised to loosely tighten all mountings before fully tightening.

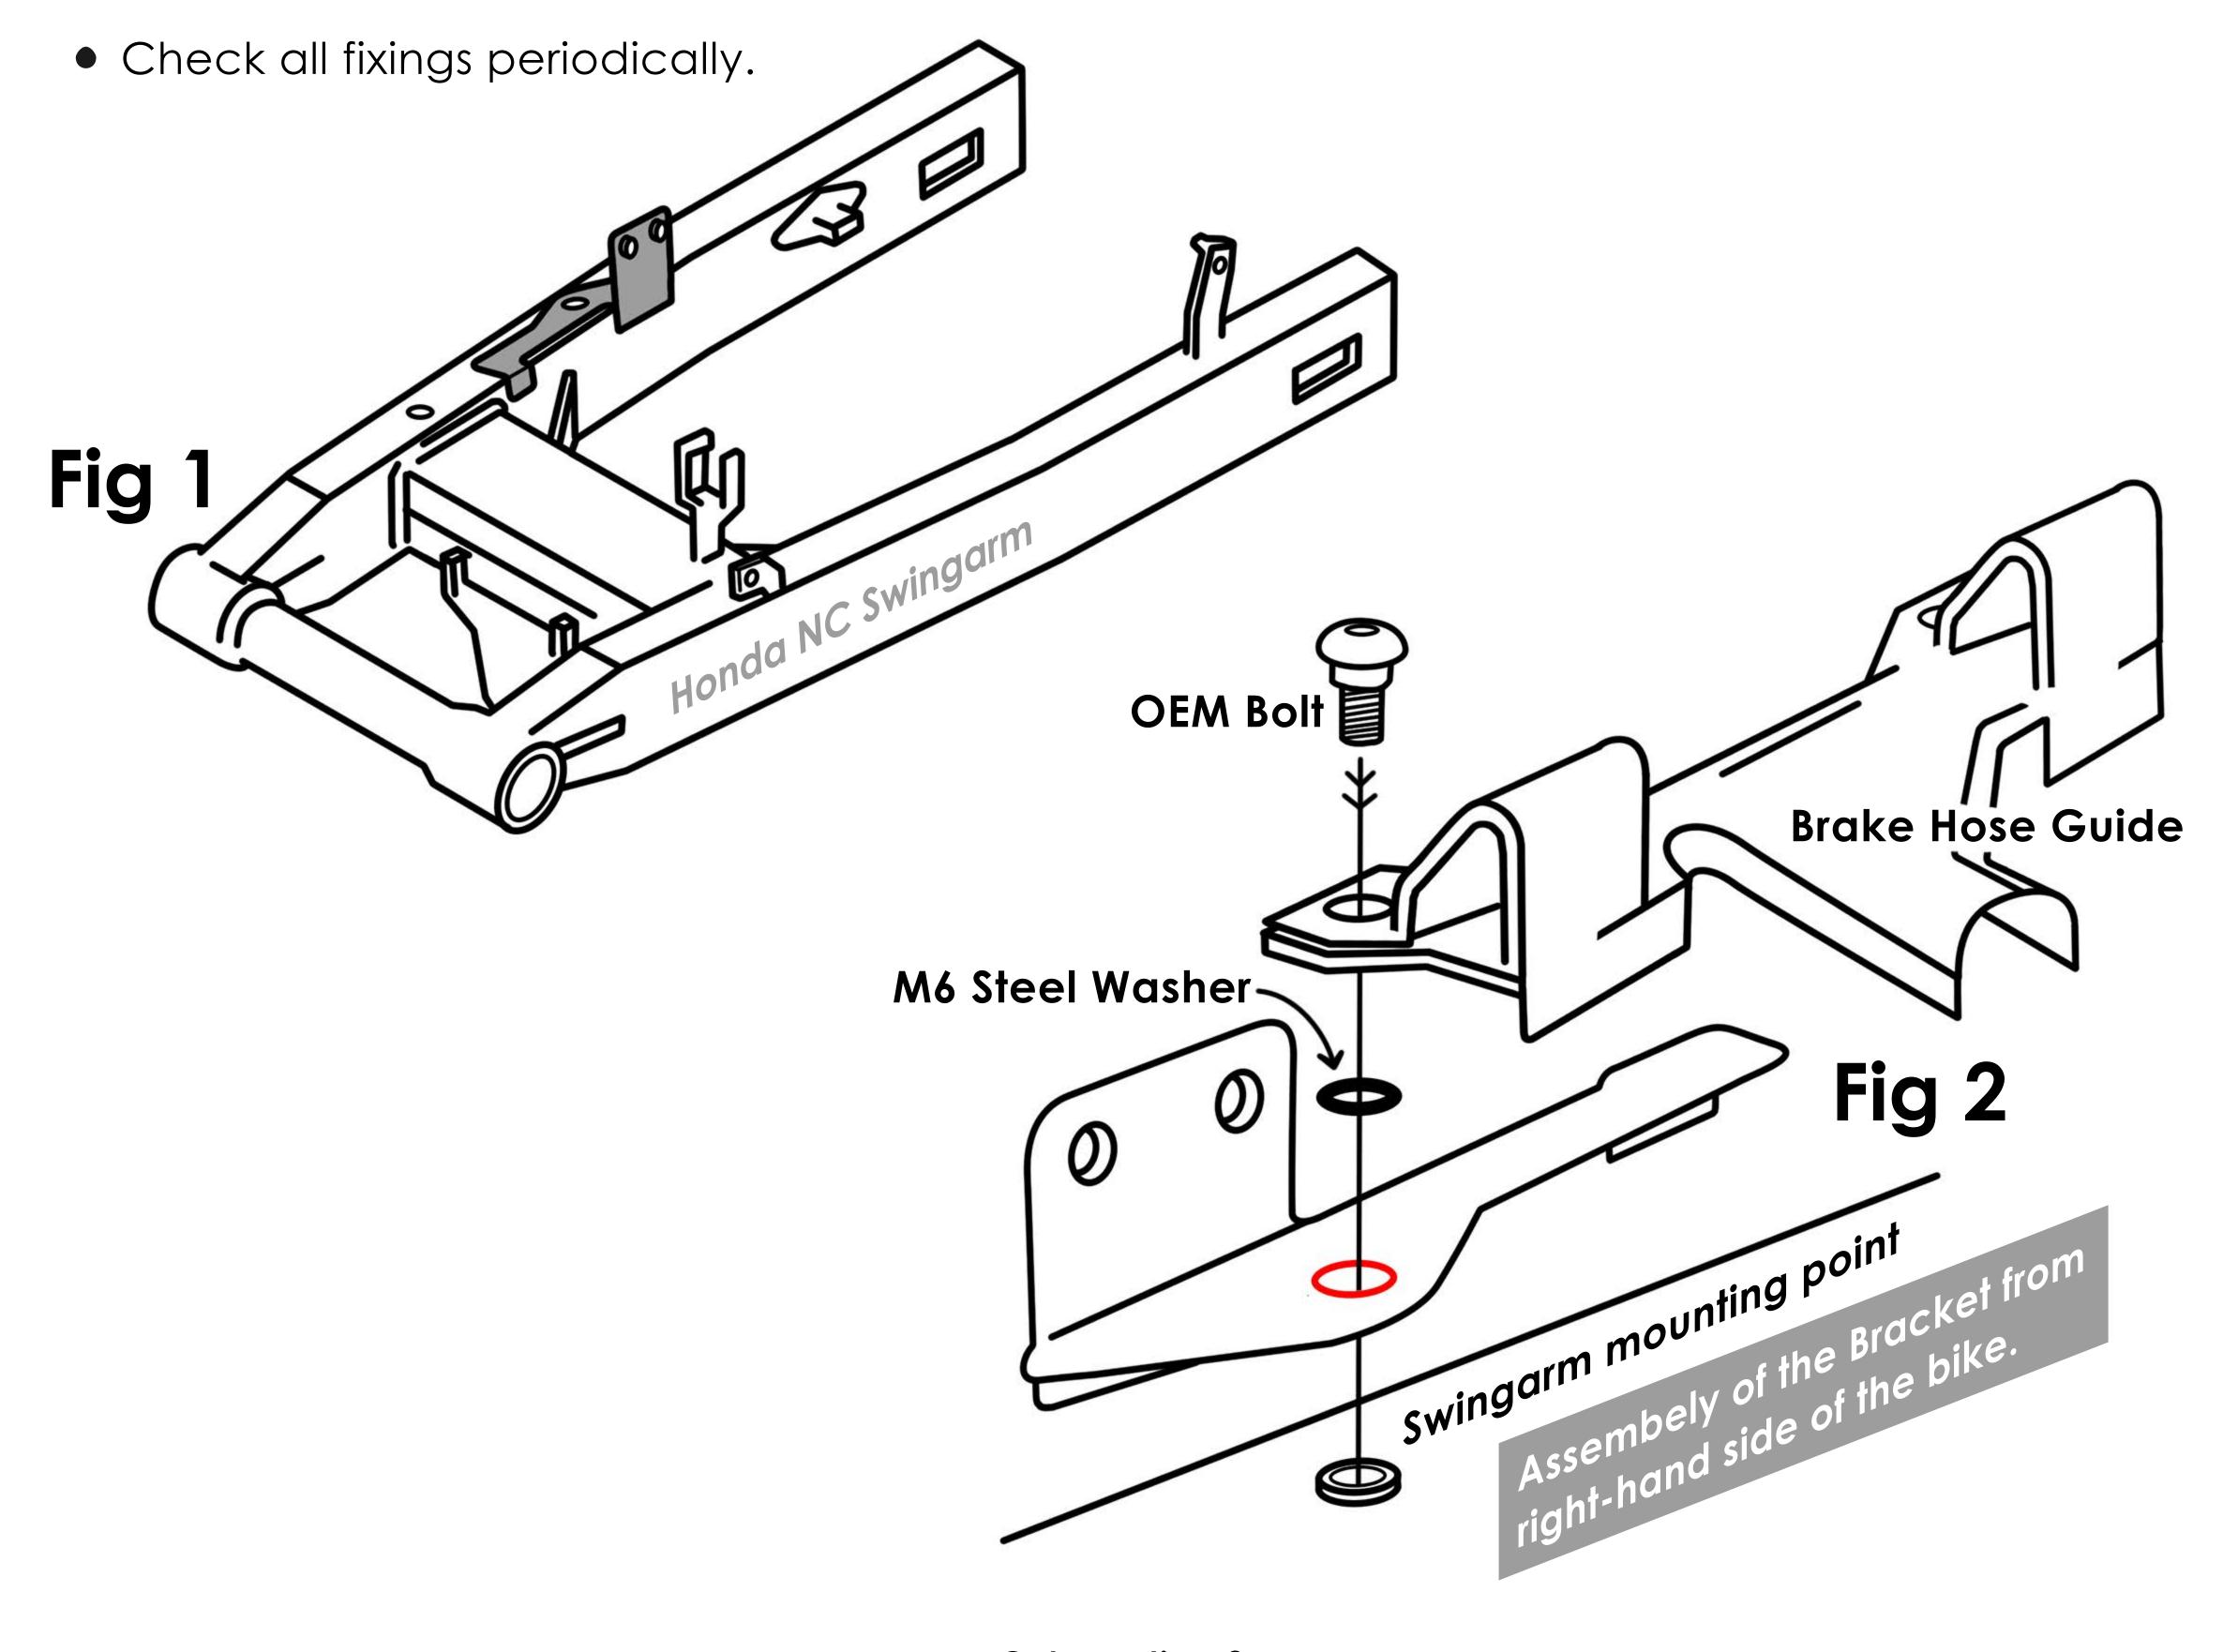

Got questions?

sales@pyramid-plastics.co.uk +44 (0) 1427 677990 www.pyramid-plastics.co.uk

