

## 207025 Bandit 1250 Fairing Lower Fitting Instructions

### Kit Includes:

2X	CBOLM60011	M6 x 25mm Flanged Button Head
2X	CBOLM60008	M6 x 16mm Flanged Button Head
2X	CBOLM60012	M6 x 30mm Flanged Button Head
6X	CGROM60001	13mm Open Rubber Grommet
6X	CSPAM60004	8mm Steel Collar
2X	CWASM60007	Rubber Washer
2X	CSPAM60010	White Plastic Spacer
2X	CSPAM60003	Black Plastic Washer
2X	CWASM60001	Flat Steel Washer
2X	CNUTM60003	Nyloc Nut
4X	CFOA0003	30mm Length Foam

1. On both sides of the bike remove the rear mounting of the nose fairing, the upper mounting of the radiator side. Also remove the radiator side plates. Fig 1
2. Fit the brackets for the rear belly pan mountings as shown in Fig 2 and Fig 3.
3. Feed the upper mounting moulding of the right hand side panel under the rear mounting of the nose fairing and loosely fasten with the original bolt.
4. Loosely fasten the radiator mounting using an M6 x 20mm flange headed bolt with an M6 x 10mm white nylon spacer in between the panel and the radiator.
5. Repeat the process for the left hand panel.
6. Place a protective cover under the bike to avoid the belly pan being scratched during fitting.
7. Insert the rubber grommets into the rear mounting holes in the belly pan and insert the steel collars into the grommets. (Note: the foam pads supplied with the fitting kit are used to create a gasket between the fairing panels and the belly pan – see Fig 4).
8. Offer the belly pan up to the brackets and loosely fasten to both rear brackets using M6 x 16mm flange headed bolts.
9. Now feed the front mountings of the belly pan under the side panels until the mountings of the belly pan and side panels match up.
10. Secure the belly pan to the side panels using the remaining M6 x 30mm bolts attached with the following rubber washer, black plastic washer, flat steel washer and nyloc nut (10 full allen key rotations to fully secure).
11. Check the fit and tighten all of the mountings fully.
12. Remember to check all fixings periodically.




**Fig 1**



**Fig 2**



**Fig 3**

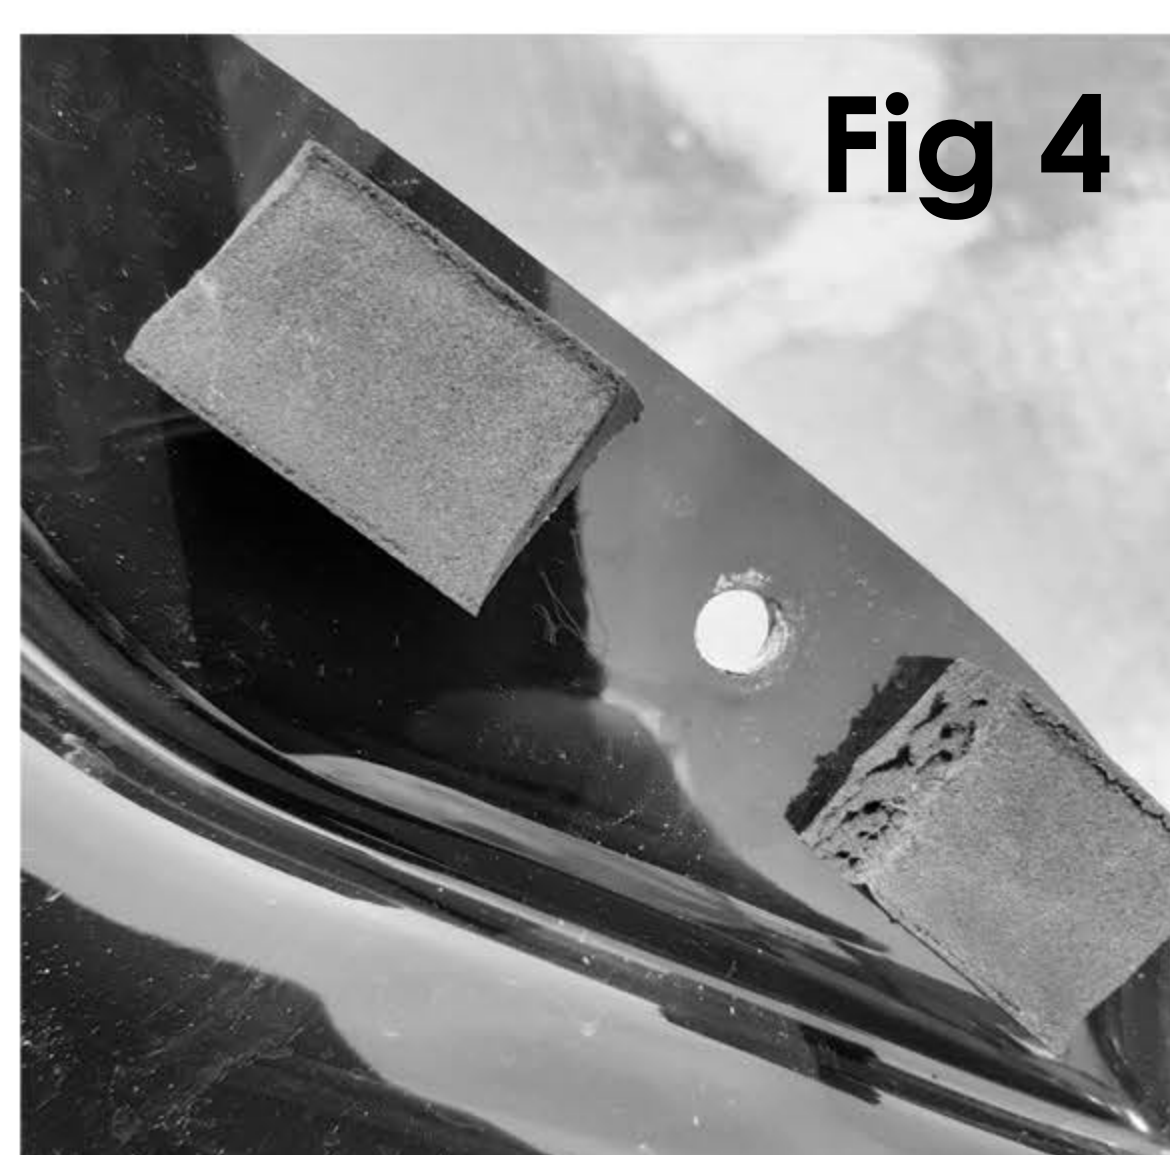

**Fig 4**

Any questions?  
[sales@pyramid-plastics.co.uk](mailto:sales@pyramid-plastics.co.uk)  
+44 (0)1427 677990  
[www.pyramid-plastics.co.uk](http://www.pyramid-plastics.co.uk)



Follow us on social media and  
feel free to leave us a review!