

RAINBOW DOWN SERIES



Description

The Rainbow Down brings a concept that goes beyond the expected look of light fixtures. The emphasis is on colours. You can afford this powerful modern technology on your ceiling. The Rainbow Down fixtures offer a variety of outer and inner colour combinations, with custom colours available, so feel free to experiment to find the best aesthetic for your space. Long lifespan: 50,000 hours. Thin & light design achieves high performance and low cost. Surface and suspended mounting options.

Mounting options



Customizable Colours



Electrical Specifications

Wattage Options:

Suspension: 40W / 90W / 180W

Surface: 40W / 90W / 150W

CCT: 3000K / 4000K / 5000K

Efficacy: 85 LM/W

CRI: >90Ra

Operating Temperature: -20 ~ 40° C / -4 ~ 104°F

Available Voltages: 120-277VAC (UNV)

0-10V Dimming Standard

LM80

Includes 1500mm / 59" electrical cable

Applications


Custom finishes available



Certifications and Warranty

ETL listed with 5 year warranty

RAINBOW DOWN SERIES 40W



Product Information

40W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	40
Fixture lumen output (lm):	3400
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	9.1 / 20.06
Gross weight carton (kg/lb):	10.9 / 24.03
Master carton dimensions (mm/in):	690 x 690 x 250 / 27.17 x 27.17 x 9.84
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWD Rainbow Down	24 23.6" (600mm)	SP Suspended (standard) CM Surface	40W-34L 40W-3400lm


CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White	
40K 4000K				BK Black	BK Black	
50K 5000K						

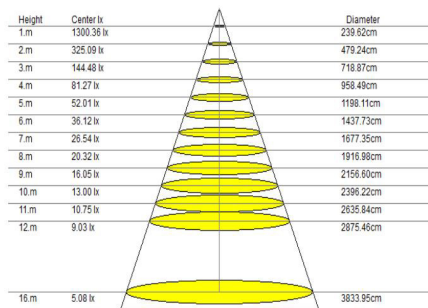

Beam Angle:100.30°(50%Imax)

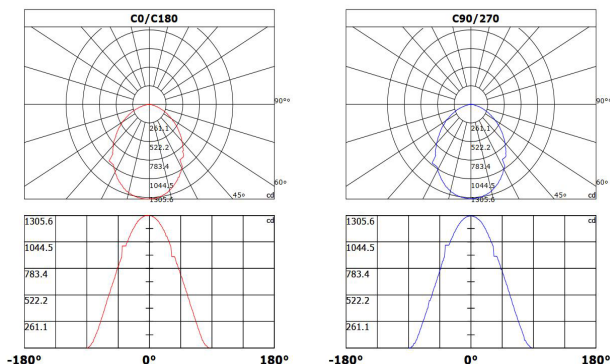

RAINBOW DOWN SERIES 90W



Product Information

90W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	90
Fixture lumen output (lm):	7650
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	13 / 28.66
Gross weight carton (kg/lb):	16.4 / 36.16
Master carton dimensions (mm/in):	1020 x 1020 x 280 / 40.16 x 40.16 x 11.02
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWD Rainbow Down	35 35.4" (900mm)	SP Suspended (standard) CM Surface	90W-76.5L 90W-7650lm


CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White	
40K 4000K				BK Black	BK Black	
50K 5000K						

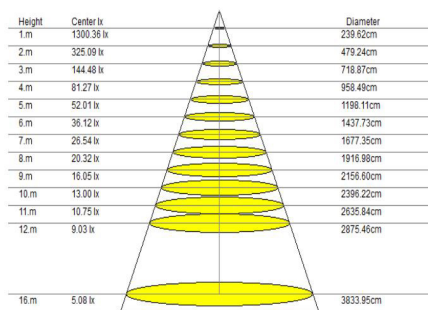

Beam Angle:100.30°(50%Imax)

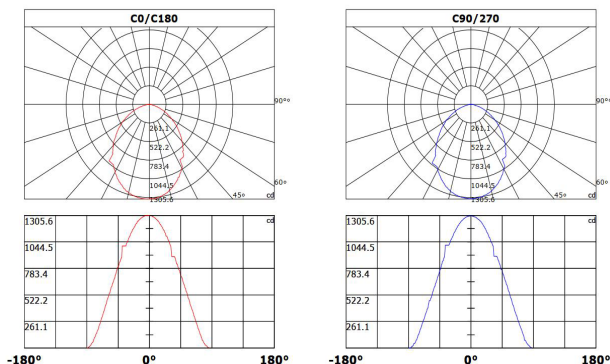

RAINBOW DOWN SERIES 150W



Product Information

150W

Installation:	Surface
Material:	Aluminum
Finish:	White
System power (W):	150
Fixture lumen output (lm):	12750
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	19.1 / 42.11
Gross weight carton (kg/lb):	23.9 / 52.69
Master carton dimensions (mm/in):	1320 x 1320 x 280 / 51.97 x 51.97 x 11.02
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWD Rainbow Down	47 47.2" (1200mm)	CM Surface	150W-127.5L 150W-12750lm


CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White	
40K 4000K				BK Black	BK Black	
50K 5000K						

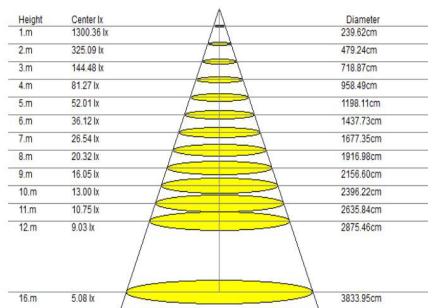

Beam Angle:100.30°(50%Imax)

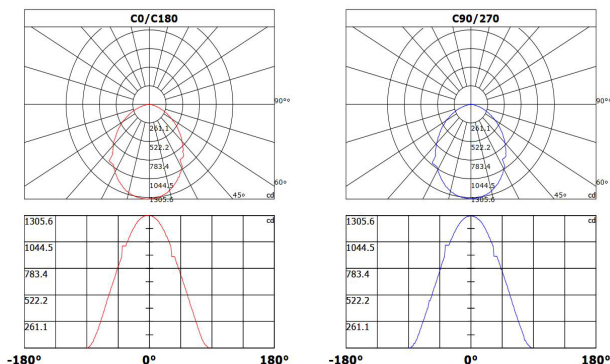

RAINBOW DOWN SERIES 180W



Product Information

180W

Installation:	Suspended
Material:	Aluminum
Finish:	White
System power (W):	180
Fixture lumen output (lm):	15300
System efficiency (lm/W):	85


Packaging

New weight lamp (kg/lb):	19.1 / 42.11
Gross weight carton (kg/lb):	23.9 / 52.69
Master carton dimensions (mm/in):	1320 x 1320 x 280 / 51.97 x 51.97 x 11.02
Quantity per carton:	1


Code composition

Series	Model	Size	Mounting	Wattage-Lumens
DR Decorative	RWD Rainbow Down	47 47.2" (1200mm)	SP Suspended	180W-153L 180W-15300lm

CCT	CRI	Voltage	Dimming	Finish - Exterior	Finish - Interior	Accessories
30K 3000K	90 90+	UNV 120-277V	D 0-10V Dimming (Standard)	WH White	WH White	
40K 4000K				BK Black	BK Black	
50K 5000K						

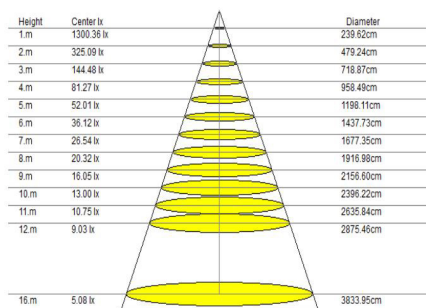


Beam Angle:100.30°(50%Imax)

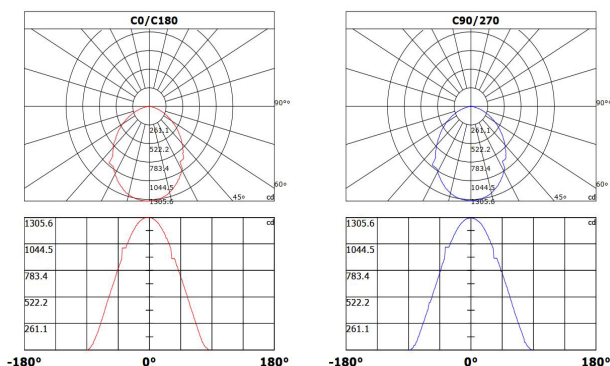

RAINBOW DOWN SERIES


Dimensions

SP - Suspension Mount (Standard)

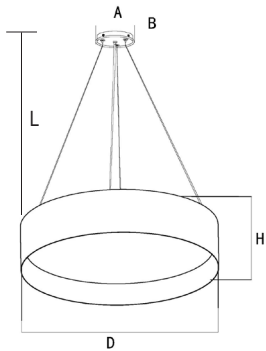

Model No	Dimension				
	D	H	A	B	L
40W	23.6" / 600mm	5.5" / 140mm	10.0" / 250mm	1.38" / 35mm	59" / 1500mm
90W	35.4" / 900mm		13.8" / 350mm		
180W	47.2" / 1200mm				

CM - Surface Mount

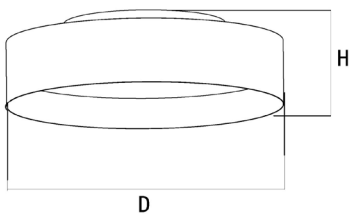

Model No	Dimension	
	D	H
40W	23.6" / 600mm	6.9" / 175mm
90W	35.4" / 900mm	
150W	47.2" / 1200mm	