




ANLY TIMER

AMY-N MULTI-RANGE ANALOGUE TIMER

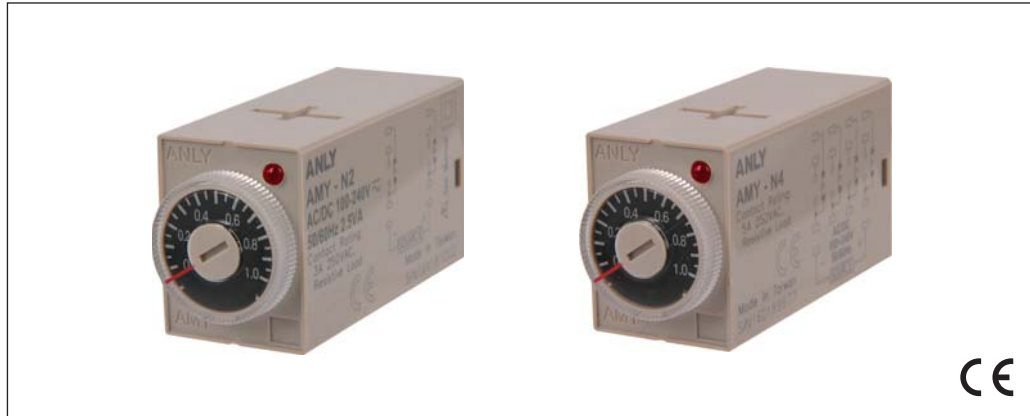

CHARACTERISTIC :

- 8 field-selectable time range, from 1 second to 600 hour
- Customized CMOS IC for low power consumption, high operation stability and extreme timing accuracy
- SMD components for miniature size
- Flush mount with Type Y-20 adapter and surface mount without adapter
- 2 poles or 4 poles output contacts available
- MY relay socket compatible
- CE certified

SPECIFICATION :


Operating voltage	AC/DC(V) : 12 ~ 24 AC/DC(V) : 100 ~ 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.2S
Power consumption	Approx. 2.7VA(24VAC) Approx. 2.5VA(240VAC)
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C
Ambient humidity	MAX 85% RH
Altitude	MAX 2000m
Weight	Approx. 45g

TYPE SELECTION :


Model	Multi-Range Variable	
Type	AMY-N2	AMY-N4
Output contact	2C	4C
Time range	8 Ranges: 1s / 10s / 1m / 10m / 1h / 10h / 60h / 600h	

CONNECTION :

AMY-N2





AMY-N4





TIMING CHART :

AMY-N2






AMY-N4







DIMENSIONS : (mm)

N type(Surface Mounting): AMY-2, AMY-N2 Using PYF08A(E) Socket
 AMY-4, AMY-N4 Using PYF14A(E) Socket



Y type(Flush Mounting): AMY-2, AMY-N2 Using Y-20 Frame & PYF08A(E) Socket
 AMY-4, AMY-N4 Using Y-20 Frame & PYF14A(E) Socket



ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan
 TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
 TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
 TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
 TEL: +86-21-6218-3300 FAX: +86-21-6217-5911