EZRXTEU Compact Thermoplastic Exit Sign

Project:	
Туре:	
Catalog #:	

STANDARD



ILLUMINATION

• Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.




HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

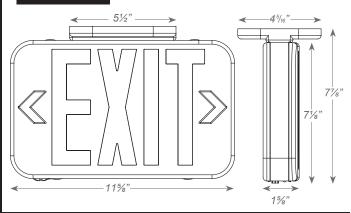

Sample Part Number: EZRXTEU2RWEM

ORDERING INFORMATION

SALIDA face plate option available. Check with your Best Lighting Representative.	MODEL	MODEL No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY	
	EZRXTEU	2	Universal Single/ Double Face	R	Red	W	White	(blank)	AC Only
				G	Green	В	Black	EM	Battery Backup

EZRXTEU Compact Thermoplastic Exit Sign

Project:	
Туре:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT W	/ATTS (W)	INPUT AMPS (A)		
	120V	277V	120V	277V	
EZRXTEU-RED/GREEN/EM	1.0	1.0	0.09	0.09	