



## Tiger Mini Range

Rugged steel body construction yet lightweight and portable



500kg lever hoist with belt bag

### Tiger 250kg Lever Hoist (LH-0025) & 500kg Lever Hoist (LH-0050)

- 360-degree handle rotation
- Short stroke and low lever pulling effort
- Easy single-hand "freewheeling" operation
- Drop forged & heat-treated alloy hooks
- Safe reliable twin pawl mechanical brake
- Proof tested to 1.5 times rated capacity
- 1.5m height of lift as standard but can be chained to exact requirements
- Supplied with useful belt bags









250kg lever hoist with belt bag

### Tiger 250kg Chain Block – CB-0025

One of the smallest and lightest chain blocks available

- Guaranteed light load protection
- Double cover protection for brake chamber
- Drop forged & heat-treated alloy hooks
- High quality alloy calibrated load chain
- Proof tested to 1.5 times rated capacity
- 3m height of lift as standard but can be chained to exact requirements
- 4:1 Factor of safety



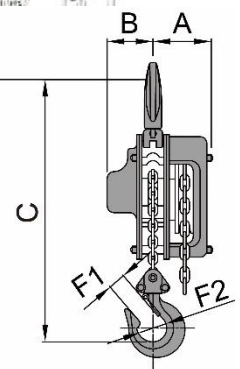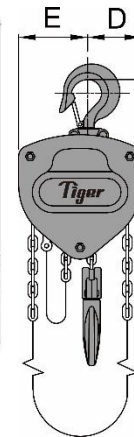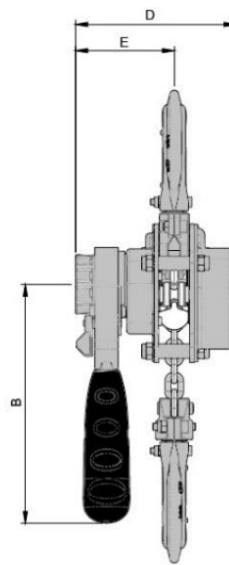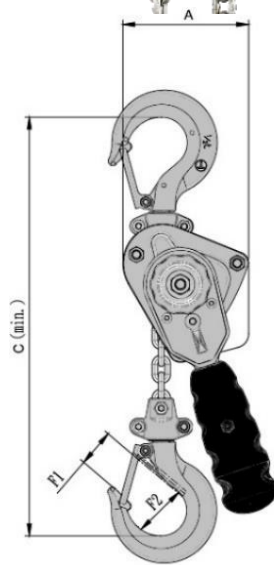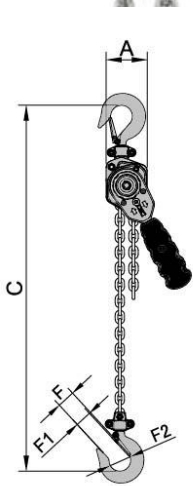

0.25t lever hoist (LH-0025)

0.5t lever hoist (LH-0050)

0.5t chain block (CB-0025)

### Technical Data

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Mass @ std HOL (kg)	Mass for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
LH-0025	0.25	30	60	168	245	85	66	22	31	ø4.0	1	1.5	2.0	0.3
LH-0050	0.50	30	89	169	280	113	70	24	38	ø4.0	1	1.5	3.0	0.3
CB-0025	0.25	17	64	40	240	36	60	22	31	ø4.0	1	3.0	3.8	0.5

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Bespoke designs available on request – contact [info@tigerlifting.com](mailto:info@tigerlifting.com) for more information.