




## Basic installation instructions for JUKI MCS BINDER KIT

Thank you for purchasing the Juki MCS-1500 series binder kit. We trust the following step by step instructions assist you with the simple installation and use of the kit.

Additional support for the device can be found on our website:

[www.jukidomestic.com.au/product/mcs-1500-binderkit](http://www.jukidomestic.com.au/product/mcs-1500-binderkit)

Enjoy using this device.

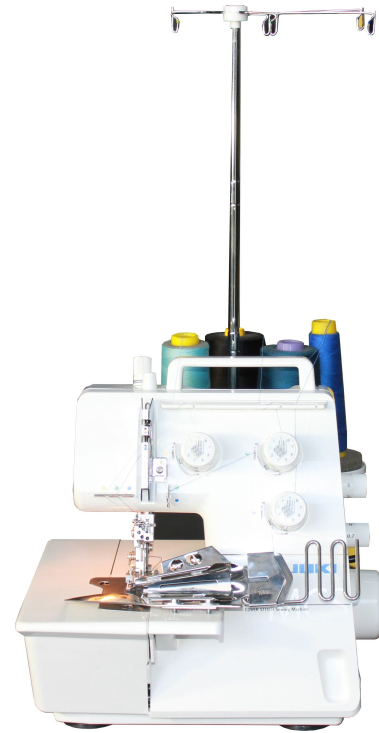

### Pre-Installation check of kit contents


**You should have:**

- 1 x Binding folder attachment
- 1 x Binder mount bracket
- 2 x M3 Countersunk phillips Mount bracket screws
- 2 x M4 Cheesehead slotted binder mount screws
- 2 x Silver flat washers

**Tools required:**

- 1 x #1 Size phillips type screw driver
- 1 x Flat type screw driver

### What is in the bag/kit

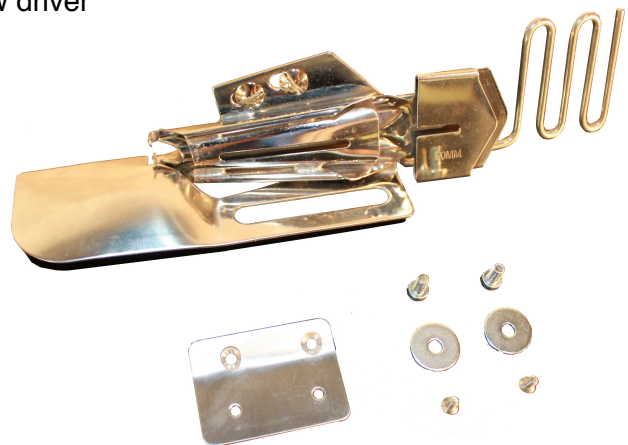


Step 1.

Using phillips screwdriver and 2 x M3 Countersunk screws, attach the bracket to machine cover plate attachment holes.




Step 2.

Unfold the binding tension guide.

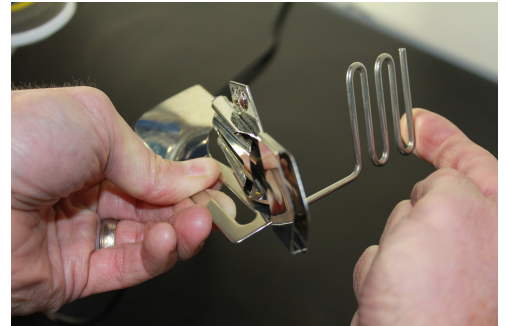

Step 3.

Using flat screwdriver, attach the binder to mounting bracket with 2 x washers and 2 x M4 screws.

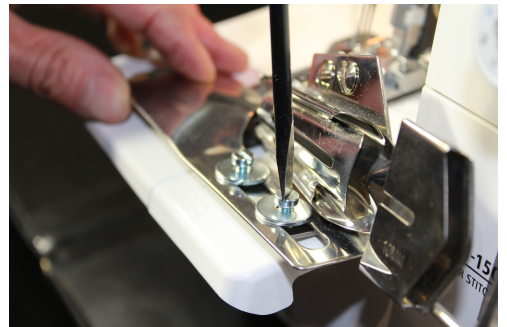

Step 4.

Align binder in approximate position to needles before tightening.

Cut binding tape to a angle / point and feed tape into the binder.

**NOTE:**

For reliable results, the binding tape **MUST** be cut accurately to correct size. If using a stretch binding tape that may shrink under some tension, better results could be achieved if binding cut 1-2mm wider than binder folder specification.

Step 5.



Step 6.

Drag binding tape through and turn back and load under presser foot



Step 7.

In normal circumstances, we would remove the right hand needle and run binding at two needles only (left and centre)




Run machine to stitch some binding and inspect results.




Step 8.

Additional binder alignment can be completed with by loosening the slotted M4 screws or fine tuning of top/bottom folded edges can be made by adjusting the binder fingers.

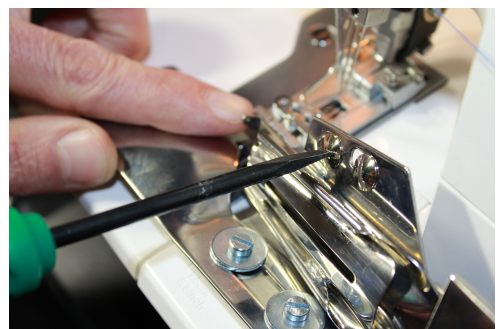

Step 9.

Continue alignments and practice binding onto material by placing the panel into the throat of binder device. The binding will assist panel feed through machine.

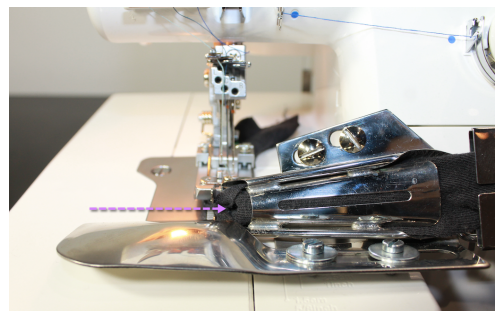

Once your binding task is complete, remove the binder attachment from bracket using the M4 slotted screws with flat screw driver.

Step 10.

**We recommend leaving the binder mounting bracket installed on your machine for future use. We expect this bracket being in place does not interfere with normal overstretch seaming work.**

Again, thank you for your purchase of the MCS binding kit, we hope it is a valuable device to enhance your sewing experience with the MCS-1500 series.

For latest models and devices, please stay in contact with your local Juki Domestic dealer and refer to [www.jukidomestic.com.au](http://www.jukidomestic.com.au)

[www.jukidomestic.com.au](http://www.jukidomestic.com.au)