


SR Series Rivets | ALUMINIUM

The SR Series rivets are blind rivets with a mechanically locked mandrel. They are optimal for structural or demanding applications. Installed easily from one side, the rivet features impressive installed values, excellent hole fill, generous grip range, pressure tight seal and flush breaking mandrel regardless of material thickness.

Material: Body: Aluminium
Mandrel: Aluminium

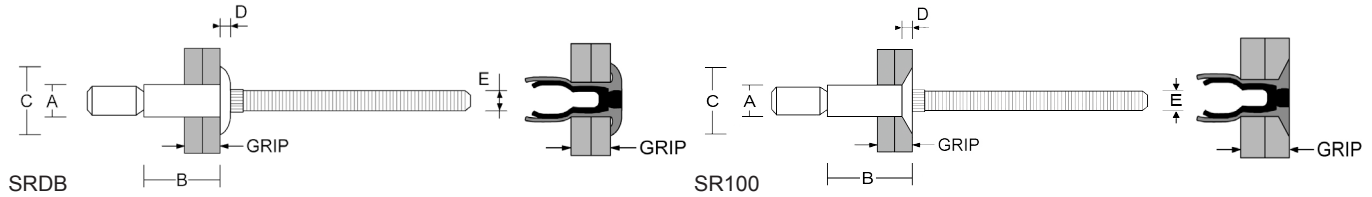

Diameter	Part Code	Grip Range	Hole Size	A	B	C	D	E	Shear	Tensile
mm		mm	mm	mm	mm	mm	mm	mm	KN	KN

SRDB | Aluminium Rivet | Aluminium Mandrel | Dome Head

4.8	SRDB-0604	1.60 - 6.35	5.00	4.80	10.5	9.80	2.10	3.00	3.10	2.20
	SRDB-0607XG	1.60 - 11.1	5.00	4.80	14.5	9.80	2.10	3.00	3.10	2.20
6.4	SRDB-0806	2.00 - 9.50	6.75	6.40	14.2	13.3	2.80	3.90	5.90	4.40
	SRDB-0810XG	3.00 - 16.0	6.75	6.40	20.5	13.3	2.80	3.90	5.90	4.40
9.5	SRDB-1212	3.20 - 14.2	10.0	9.50	21.3	20.0	4.00	5.80	13.9	8.30

SR100 | Aluminium Rivet | Aluminium Mandrel | 100° Countersunk Head

4.8	SR100-B605	3.20 - 8.00	5.00	4.80	11.7	8.90	1.90	2.90	3.10	2.20
	SR100-B608	7.00 - 12.7	5.00	4.80	14.5	8.90	1.90	2.90	3.10	2.20
6.4	SR100-B807	3.20 - 11.1	6.75	6.40	18.7	11.0	2.20	3.90	5.90	4.40
	SR100-B812	10.5 - 18.4	6.75	6.40	23.1	11.0	2.20	3.90	5.90	4.40

SRTB | Aluminium Rivet | Aluminium Mandrel | Large Flange

4.8	SRTB-0604	1.60 - 6.35	5.00	4.80	10.5	12.7	1.90	2.90	3.10	2.20
	SRTB-0607XG	5.40 - 11.1	5.00	4.80	14.5	12.7	1.90	2.90	3.10	2.20