

Project: _____ Part #: _____
Type: _____

Wraps



2' & 4' Frosted LED Wrap

6-CCT + 3-Power Selectable



Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Frosted Lens
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Residential, Commercial and Industrial

Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- Select-n-Switch Technology: 6-CCT + 3-Power Selectable
- 1/2" Knockout on both ends of the fixture

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

Mounting & Installation:

- Surface mount into 30 or 40 j-box
- Optional 10' & 20' suspension kit available
- Optional 6' chain mount available

Certifications:

- ETL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Size/Power	CCT	Voltage	Sensor	Emergency	Finish ¹
LED-WRP-FR		- 6CCT -	UNV			
	2FT-3P24 16/20/24W	27/30/35	120-277V	(Blank) No Sensor	(Blank) No Emergency	(Blank) White
	4FT-3P48 32/40/48W	40/50/65K		BMS Bi-Level Motion + Daylight Sensor (HD-407VC-R)	EMB Emergency Backup	BL ¹ Black GRY ¹ Gray BRZ ¹ Bronze CS ¹ Custom Color


Optional Accessories (Order Separately)

- Accessories**
- SK-10FT-Y-LC-PD**
10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
 - SK-20FT-Y-LC-PD**
20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
 - CK-6FT-V**
6' Chain Hanging Kit


1. Standard quick ship finish is white. Other colors are custom finishes.

Specs and model numbers are subject to change with or without notice.

FEATURES

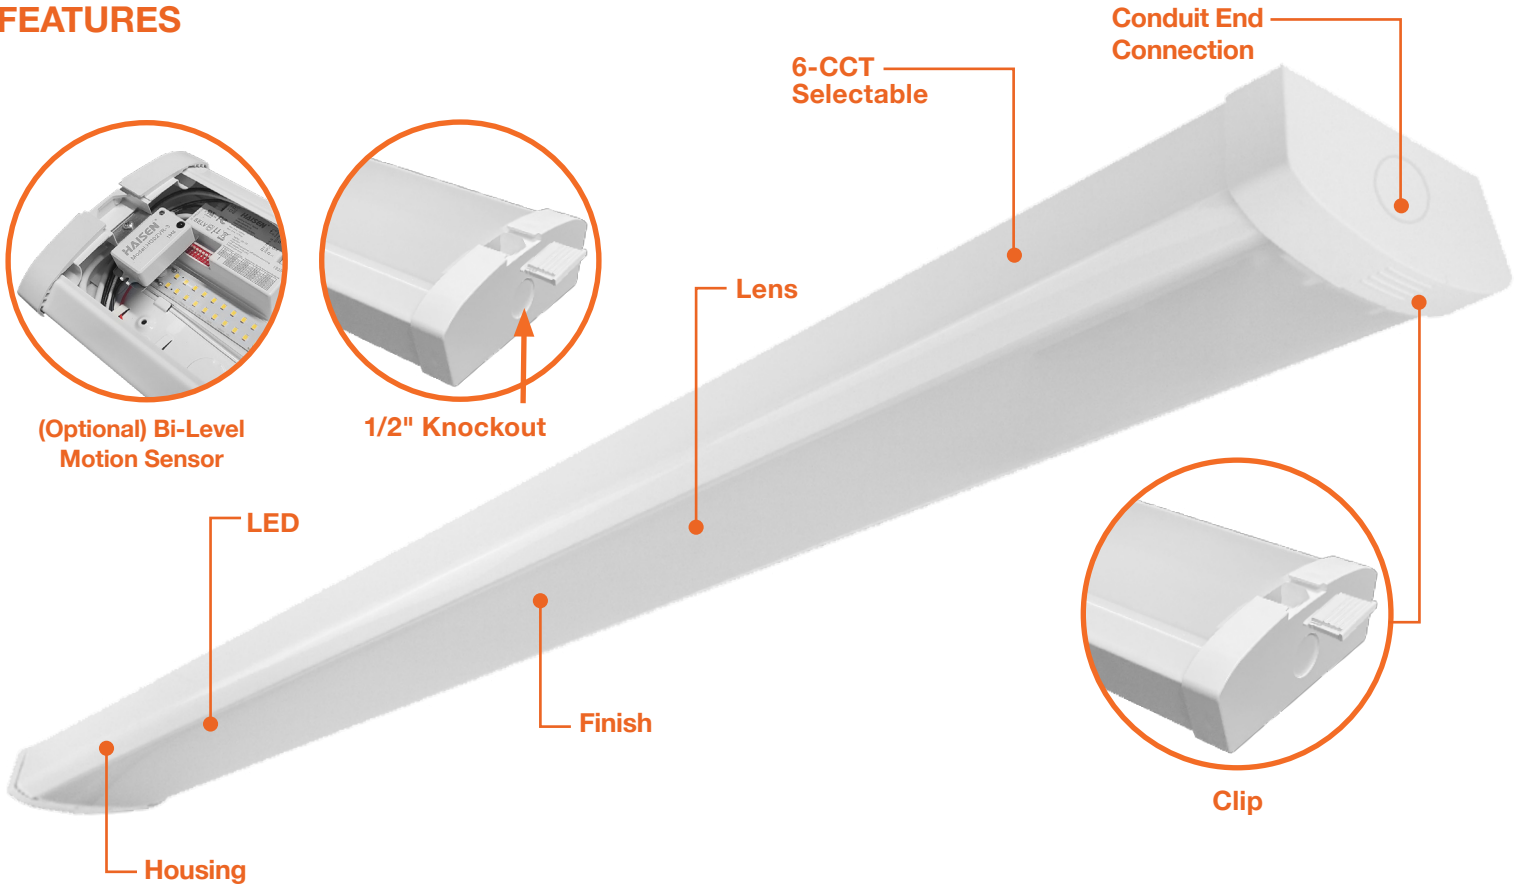

DIMENSIONS

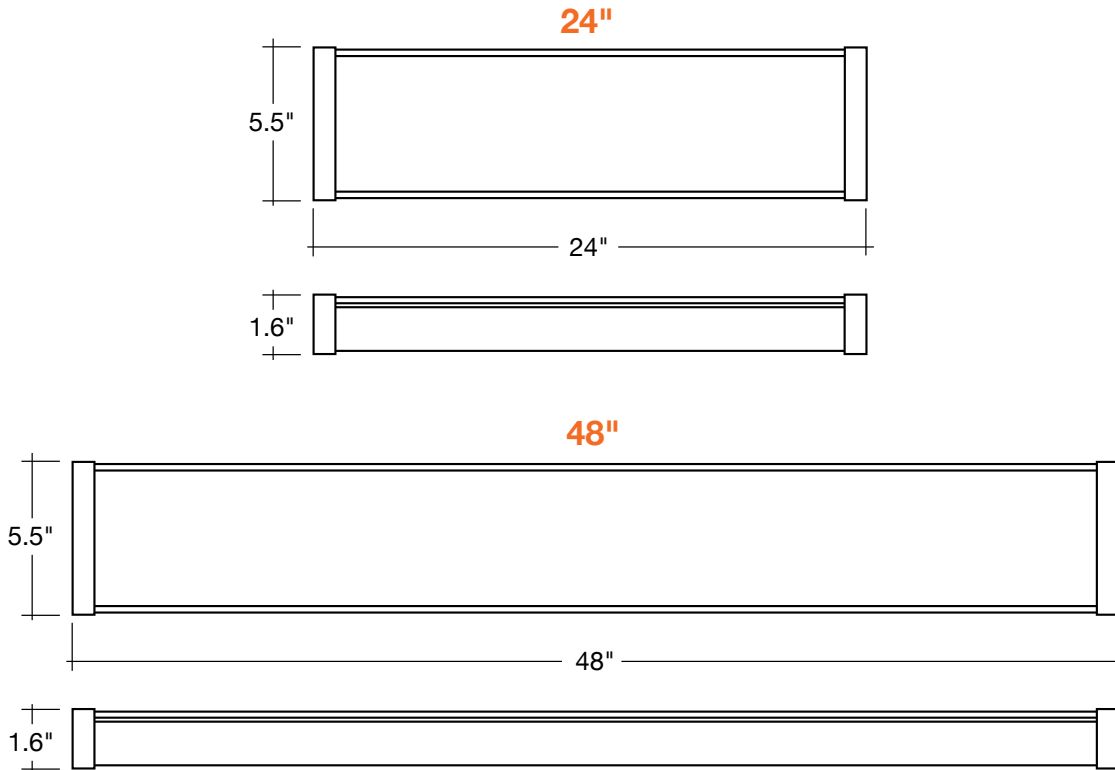

ACCESSORIES

WRAP FIXTURE

Model	Voltage	Watts	Lumens	Color	CRI
LED-WRP-FR-2FT-3P24-6CCT-UNV	120-277V	24/15/16	2760/2300/1840	27/30/35/40/50/65k	>80
LED-WRP-FR-4FT-3P48-6CCT-UNV	120-277V	48/30/32	5520/4600/3680	27/30/35/40/50/65k	>80




SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD

SUSPENSION KIT

Model	Description
SK-10FT-Y-LC-PD	Suspension Kit: 10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	Suspension Kit: 20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
CK-6FT-V	6' Chain Hanging Kit

CHAIN HANGING KIT

Model	Description
CK-6FT-V	6ft Chain Hanging Kit



Hanging Kit
CK-6FT-V