

GSC **GAS STATION CANOPY 13"x 13"**

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Gas Station Canopy (GSC) Is designed to replace existing single deck under canopy metal halide light fixtures in gas station canopies easily and cost-efficiently. Our LED Gas Station Canopy provides advantages such as longer life, lower energy consumption and better lighting characteristics while eliminating maintenance with 50,000+ hours of rated lamp life. The housing is constructed of heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating to ensure weather-tight protection, the optical assembly is sealed with a silicone gasket and are DLC certified with an IP65 rating.



Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Gas Station, Ceiling, Pathway, Parking, Garage Structure, Security

FEATURES

- IP65 Rated
- UL Listed
- Long life LED chips
- ColorTemp: 5000K
- Beam Angle: 115°
- Input line voltage: 120-277V
- CRI: 80
- Surge Protection: 2KV
- Powerfactor >0.9
- Designed for single deck canopy
- Material: Aluminum die-cast
- Tempered Glass (Thermal, Shock & Impact Resistant)
- Operating temperature: - 40°F - 140°F
- 5 Year Warranty
- Finish: White

SAMPLE NUMBER **LED-FXGSC45/50K/WH**

STYLE	FAMILY	SERIES	WATTAGE	COLOR TEMP	COLOR
LED	FX	GSC	45	50K	WH
LED Lighting	Fixture	Gas Station Canopy	45 Watt	5000K	White





ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	IP65 Rated
46	7440	LED-FXGSC45/50K/WH	5000K	5,513	250	13"x13"	•
75	7441	LED-FXGSC75/50K/WH	5000K	8,997	320	13"x13"	•


DIMENSIONS

46W / 75W
15-lbs

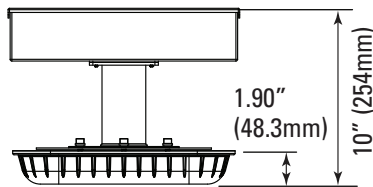

PHOTOMETRICS CHART


46 Watt



Center Beam (L)	Beam Width (L)	Beam Width (W)
5.0ft	79.5 fc	15.4 ft / 15.3 ft
10.0ft	19.9 fc	30.8 ft / 30.7 ft
15.0ft	8.83 fc	46.2 ft / 46.0 ft
20.0ft	4.97 fc	61.6 ft / 61.3 ft
25.0ft	3.18 fc	77.0 ft / 76.7 ft
30.0ft	2.21 fc	92.4 ft / 92.0 ft

■ Vert. Spread: 114.0°
■ Horiz. Spread: 113.0°

75 Watt



Center Beam (L)	Beam Width (L)	Beam Width (W)
5.0ft	116 fc	15.6 ft / 15.5 ft
10.0ft	29.1 fc	31.2 ft / 31.1 ft
15.0ft	12.9 fc	46.7 ft / 46.6 ft
20.0ft	7.27 fc	62.9 ft / 62.2 ft
25.0ft	4.65 fc	77.9 ft / 77.7 ft
30.0ft	3.23 fc	93.5 ft / 93.3 ft

■ Vert. Spread: 114.6°
■ Horiz. Spread: 114.5°

PACKAGE

Case Qty 1 pc

