LFX-MD SERIES Outdoor Lighting

LFX-MD-15-50W-30K-TR LFX-MD-15-50W-40K-TR LFX-MD-15-50W-50K-TR



Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.



Customer Name:

Project Name:

Note: Type: 9 3/8"

9 3/4"(H) x 9 3/8"(W) x 2"(D)

2"

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life

- 7-Year Warranty
- Optic Lens Type: III
- Multi-Power The Switch is on the bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: Selectable Wattages (15W/ 20W/ 30W/ 50W)
- Power Factor: >0.9Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- LED: Philips Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 270° Adjustable Yoke Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Total Lumens: 6700LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

















Lighting Supplier Since 2003




Warehouse-Lighting.com 2750 South 163rd St New Berlin, WI 53151 Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com

Photometrics: LFX-MD-15-50W-50K-TR





BUG Rating: B3-U0-G1

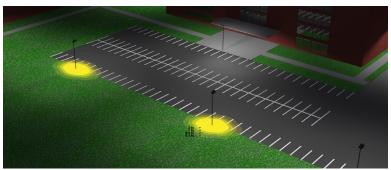

Area 45'x 55' Mounting Height: 20'

Other Views:





Back View

N

Performance Table: LFX-MD-15-50W-TR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-MD-15-50W-30K-TR	15W	120~277V	2180LM	3000K 4000K 5000K	B3-U0-G1	130
			2250LM			
			2300LM			
	20W		2800LM			
LFX-MD-15-50W-40K-TR			2900LM			
			3000LM			
	30W		4050LM			
			4200LM			
LFX-MD-15-50W-50K-TR			4300LM			
	50W		6300LM			
			6500LM			
			6700LM			

Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount			
LFX =	MD	– 15	– 50W –		TR			
			30K = 3000K					

40K = 4000K 40K = 4000K 50K = 5000K

Lighting Supplier Since 2003



Warehouse-Lighting.com 2750 South 163rd St New Berlin, WI 53151

Color Options: Custom Color Available Black Silver White Dark Bronze Green Red Yellow Default color

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com