


LRX SERIES Outdoor Lighting

LRX-20-50W-MCTP
POWER & CCT BARN/AREA LIGHT

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

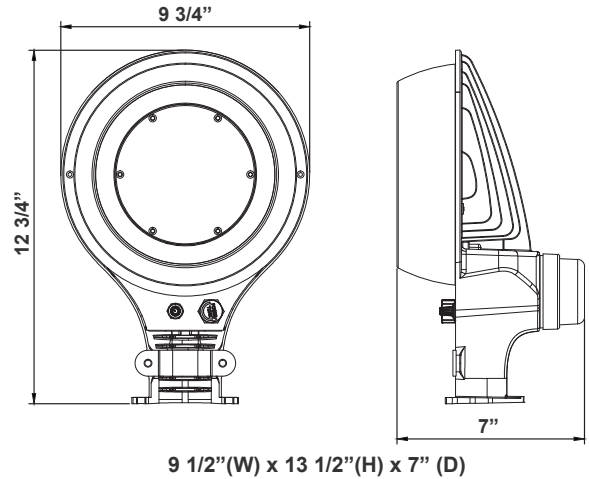

LED Dusk to Dawn Light with Photocell ideal for general site lighting, yard/barn lighting, loading docks, doorway, pathway and parking areas.

Features

- Back plate: Die-cast aluminum
- Polycarbonate Lens
- 7-Year Warranty
- Multi CCT, Switch is on bottom of Fixture

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 20W/ 30W/ 40W/ 50W
- Power Factor: >0.90
- Efficacy: 130 LPW
- THD: <20%

Mechanical:

- Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- Lens: High light Transmittance PC, Anti-UV and Fire Resistant
- 1-1/4" EMT Elbow & Mounting Strap Included
- NEMA Twist-Lock Photocell Included
- Aluminum LED board: High Conductive, Waterproof, Aging Resistance, Salt Resistance
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP44

Lighting:

- Dimming: 0-10V Dimming
- Total Lumens: 6500LM
- Multi CCT, Switch is on bottom of Fixture
- Color Temperatures: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:



- LED Dusk to Dawn Light with Photocell ideal for general site lighting, yard/barn lighting, loading docks, doorway, pathway and parking areas.

Other Models:


- 120W | 15600LM | LRX-50-120W-MCTP



Photometrics: LRX-20-50W-MCTP

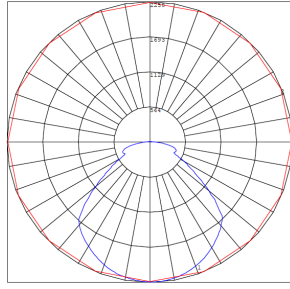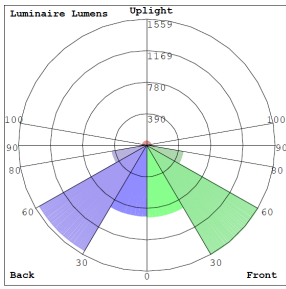

BUG Rating: B2-U3-G1

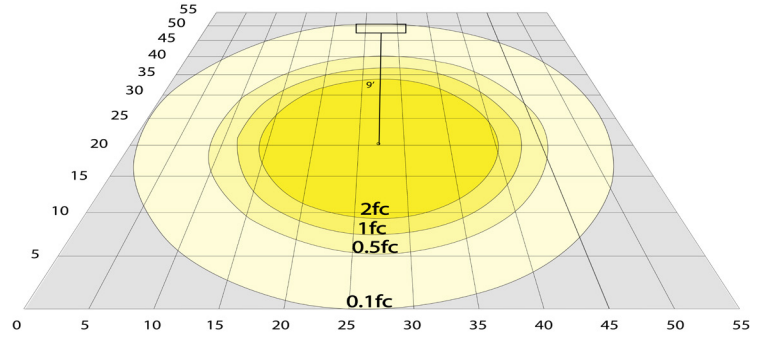

Area 55'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LRX-20-50W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRX-20-50W-MCTP	20W	120-277V	2950LM	3000K 4000K 5000K 5700K	B2-U3-G1	130
			3050LM			
			3150LM			
	3150LM					
	4150LM					
	4250LM					
	4400LM					
	4400LM					
	5500LM					
	5620LM					
	5800LM					
	5800LM					
	6400LM					
	6600LM					
	6800LM					
6800LM						

Sample Ordering

Model Min. Watt Max. Watt Color Temp.

LRX - 20 - 50 - MCTP

ACCESSORIES:



90° EMT Arm and Wall Bracket
(Mounting Strap) included
Arm Diameter: 1-1/4" EMT Elbow

Example:

1. LRX-20-50W-MCTP

(FOR 50W MAX MCTP FIXTURE 120-277V)

