

PCL

# PENDANT LIGHT

#### **DESCRIPTION**

naturaLED® Pendant Light (PCL) fixture is a versatile and high performance fixture offering both precision lighting and elegant style and can be used for any new constructions, remodel, or retrofit projects. Adjustable mounting for flat or sloped ceiling, which also includes pendant pole of 12" length or extension to 24" length. This classic cylindrical design with frosted lens allowing a modern look with a warm glow illuminating for both residential or commercial use.

#### **APPLICATIONS**

Architectural, Perimeter, Commercial, Pathway

PROJECT:

SCHEDULE: DATE:

PREPARE BY:

Flat and Sloped Ceiling Mounting









NOTES:

**Rated Life** 50,000 Hours **Warranty** 5 Years

#### **FEATURES**

- Energy Star
- Wet Location
- ETL Listed
- Color Temp: 3000KVoltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 3.75KV
- Beam Angle: 33°
- CRI: 90
- Operating temperature: 4°F 122°F
- Excellent thermal design
- Easy installation
- 5 Year Warranty

#### **INCLUDED WITH PENDANT**



SAMPLE NUMBER		LED-FX4PCL18/33/930/BK						
STYLE	FAMILY	DIAMETER	SERIES	WATTAGE	BEAM ANGLE	CRI/COLOR TEMP	COLOR	
LED	FX	4	PCL	18	33	930	ВК	
LED Lighting	Fixture	4.5-inch	Pendant Light	18 Watt	33°	CRI 90 3000K	Black	













# **ORDERING**

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location	Energy Star
18	7794	LED-FX4PCL18/33/930/BK	3000K	1,300	100	4.5"	•	•

#### **MOUNTING**






# **DIMENSIONS**


# 18W (4.5-inch)

2.65-lbs

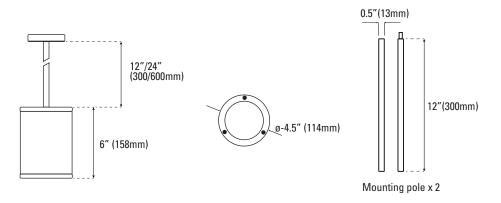

# **PHOTOMETRICS CHART**

# **18W (4.5-inch)** Energy Star



	Center Beam fc	Beam Wid	lth
5.08	113 fc	2.8 ft	2.8 ft
10.08	28.3 fc	5.5 ft	5.6 ft
15.08	12.6 fc	8.3 ft	8.4 ft
20.08	7.08 fc	11.1 ft	11.1 R
25.08	4.53 fc	13.8 ft	13.9 ft
30.08	3.15 fc	16.6 ft	16.7 R

# **PACKAGE**

