




**HI-LITE MFG.  
CO., INC.**  
13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Fax: (909) 465-0907

Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Quantity: \_\_\_\_\_

**Emblem Shade  
Collection**

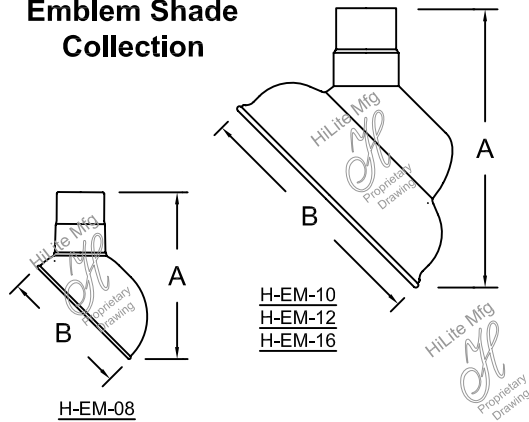

Item Number	Height (A)	Width (B)
H-EM-08	9"	8"
H-EM-10	11"	10"
H-EM-12	14"	12"
H-EM-16	18"	16"

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
<b>H-EM-08</b> (1) <b>H-EM-10</b> (1) <b>H-EM-12</b> <b>H-EM-16</b>	Standard (2) <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BR01, GN20</b> .  Upgraded Finishes. <b>29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 98, 101, 102, 137, 138, 139, 140, 121, 122, 123, 124, 125, 126, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.</b>  For finish specs see pages 344-348.	Mounting Options <b>1/2"</b> <b>3/4"</b>  Stem Options (Stem 1/2") ___ST Specify length and canopy. <b>HSC</b> (Canopy) <b>SMC</b> (Canopy)  Flush Mount Options <b>FHSC</b> <b>FSMC</b>  Arm Options <b>B-1 HL-K</b> <b>HL-A HL-U</b> <b>HL-H P-1</b> <b>HL-C P-3</b> <b>HL-D</b>  For all arms and specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	<b>CGU</b> (Cast guard & glass)  <b>LCGU</b> (Large cast guard & glass)  <b>WGU</b> (Wire guard & glass)  <b>LWGU</b> (Large wire guard & glass)  <b>ARN</b> (Acorn globe)  <b>LARN</b> (Large acorn globe)  <b>WGR</b> (Wire guard)  <b>SK</b> (Swivel knuckle)  For specs and glass color see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	Incandescent (6) (Fixture is standard 200W. Do not specify.)  CFL (3) (6) (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>  HID (3) (High Intensity Discharge)  MH (6) (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b> <b>150/MH</b> <b>175/MH</b>  HPS (3) (6) (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to part No.)  LED <b>20W</b> <b>30W</b>	Ballast option not available for INC.  <b>RB</b> (4) (Remote)  <b>BCM</b> (Canopy Mount)  <b>PLB</b> (5) (Postline)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)  HID RB and BCM <b>M</b> (Multi 120/208/240/277V)  PLB <b>1</b> (120V) <b>2</b> (277V)  LED See specifications for complete part number.

H-EM-10 - 91 / 1/2" - 91 / CGU-CLR - 91 / 13/CFL - BCM - M

**ORDER EXAMPLE**  
(USE THIS FORMAT TO PLACE ORDER)

**Notes:**

- (1) H-EM-08 not available with glass enclosures.  
H-EM-08 available for 200W Max INC, 32W Max CFL and 100W Max HID.  
H-EM-08, H-EM-10 and H-EM-12 not available with LWGU, LCGU, ARN or LARN.
- (2) For interior finish of fixture refer to color chart on pages 344-348.
- (3) Requires Globe Option. (See pages 339-341 for Globe Options)  
Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID.  
Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL and 175W HID.
- (4) (RB) Remote Ballast not available for Fluorescent Lamping.
- (5) (PLB) Post Line Ballast must specify 120V or 277V.  
(PLB) 50W MH requires a 3" dia. pole.  
(PLB) 70W and 100W MH require a 4" dia. pole.  
(PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (6) Socket Bases: INC and HID are medium base, CFL are GX24Q.

**Suitable for wet location.**  
(Except when cord mounted)