

TEST REPORT

Client: Payless Decor
6580- C Jimmy Carter Blvd
Norcross, GA 30071

Attention: Seth Roseman

E-Mail: seth@paylessdecor.com

Sample Description as Declared :

Product Name : Faux Wood Blinds
Style/Model # : 04CS
Size : 22.75"W x 49.0625"L x 2.3125"D.
Supplier : Payless Decor
Sample received date : March 13, 2019
Date of testing ended : March 26, 2019

SUMMARY

The testing is performed on Window Coverings for the WCMA "Best For Kids Program" per standard ANSI/WCMA A100.1-2014; it may have no cord or may be tested per Appendix C or Appendix D of the standard based on cord configuration. This report will only state if the specified criteria is met for the tested product. This report does not provide certification or authorization to use the "Best for Kids" logo.

OVERALL CONCLUSION:

	<u>Criteria</u>	<u>Result</u>
1.	WCMA 'Best for Kids' Program	1. Eligible



**For and on behalf of
Intertek Products Group North America:**

Intertek Consumer Goods

545 E Algonquin Road, Suite F
Arlington Heights, Illinois 60005
Telephone: 847-871-1020 Fax: 847-439-6156



TEST RESULTS:

1. Inspection for the Window Covering Manufacturing Association (WCMA) 'Best for Kids' Program

Test Method: WCMA/ANSI A100.1, visual check and testing per Appendix C and D.

Manufacturer: Payless Decor

Model Number: UW 64C1

Overall Dimensions of the Window Covering: 22.75"W x 49.0625"L x 2.3125"D.

Results:

Requirement / Limit	Comments / Rating
<p>Visual Check/ ANSI/WCMA A100.1 S The window covering product shall not have any operating cords. If product contains an operating cord no further testing is required and product is not eligible for the WCMA 'Best for Kids' Program</p> <p>Test 1: It shall have no inner cords. Inner cords shall include breakaways, tie downs or cleats.</p> <p>Test 2: The inner cords shall not be accessible in accordance with Appendix C of the current version of ANSI/WCMA A100.1.</p> <p>Test 3: If accessible inner cords are present in products with no operating cords, the accessible inner cords cannot create a hazardous loop in accordance with Appendix D of the current version of ANSI/WCMA A100.1, or in any way create a potential wrap around hazard.</p>	<p>Not Eligible</p> <p>Comments: Inner cords present.</p>
<p>Accessible Cord, Appendix C</p> <p>Open Construction:</p> <ul style="list-style-type: none"> • If the inner cord accessibility probe can touch any cords before reaching the 2 in (51 mm) diameter section the cords are considered accessible and must be tested to Appendix D: Hazardous Loop Test Procedure • If the 2 in (51 mm) diameter section of the inner cord accessibility probe can be inserted into any opening then the cords are considered accessible and must be tested in Appendix D: Hazardous Loop Test Procedure <p>Closed Construction:</p> <ul style="list-style-type: none"> • If the inner cord accessibility probe can touch any cords before reaching the 4 in (102mm) diameter section the cords are considered accessible and must be tested to the Appendix D: Hazardous Loop Test Procedure • If the 4 in (102 mm) diameter section of the inner cord accessibility probe can be inserted into any opening then the cords are considered accessible and must be tested to Appendix D: Hazardous Loop Test Procedure 	<p>Not Eligible</p> <p>Comments: Inner cords are accessible</p>

Intertek Consumer Goods


545 E Algonquin Road, Suite F
Arlington Heights, Illinois 60005
Telephone: 847-871-1020 Fax: 847-439-6156



Requirement / Limit	Comments / Rating
<p>Cord Shroud Accessibility Test with Cord Shroud Accessibility Probe</p> <ul style="list-style-type: none"> If the cord shroud accessibility probe cannot be inserted between the cord shroud and inner lift cord(s) without intricate manipulation, the cords will be tested as an assembly in accordance with Appendix D: Hazardous Loop Test Procedure. If the cord shroud accessibility probe can be inserted between the cord shroud and inner lift cord(s) without intricate manipulation, both are deemed accessible and will be tested individually in accordance with Appendix D: Hazardous Loop Test Procedure. 	<p>Not Eligible</p>
<p>Hazardous Loop Test – Appendix D</p> <ul style="list-style-type: none"> If the head probe cannot pass through the loop under the test conditions, the opening is not a hazardous loop. If the head probe can pass through the loop under the test conditions, the loop is considered a hazardous loop. 	<p>Eligible Comments: Hazardous loop not created.</p>

Conclusion: Eligible

Sample Pictures

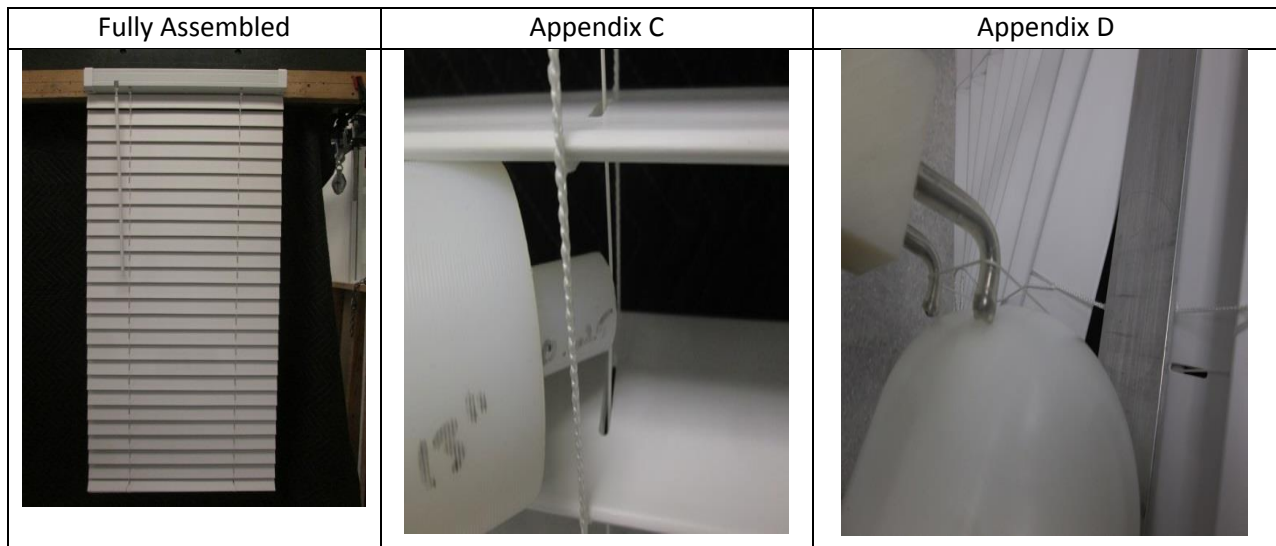

Intertek Consumer Goods

545 E Algonquin Road, Suite F
Arlington Heights, Illinois 60005
Telephone: 847-871-1020 Fax: 847-439-6156



AT-1348

The test results stated in this report relate only to the item(s) tested. This test report may not be reproduced except in full, without written approval of Intertek.

.....

*If you need assistance in interpreting these results or if you have any questions,
please feel free to call Customer Service Department*

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or willful misconduct.

Intertek Consumer Goods

545 E Algonquin Road, Suite F
Arlington Heights, Illinois 60005
Telephone: 847-871-1020 Fax: 847-439-6156



AT-1348