

REMARKES:

1. under 5M cable: 1P*28#+2C*24#+AL+D+B 64 AL-B OD4.5 BLACK 2.0v
2. 5M cable:UL2725 1P*26#+2C*20#+AL+D+B 64 AL-B OD5.3 BLACK 2.0v

IMTE NO.	LENGTH
CAB-USB-20	L=500±15MM
CAB-USB-19	L=1000±20MM
CAB-USB-21	L=2000±30MM
CAB-USB-22	L=3000±50MM
CAB-USB-23	L=5000±50MM


BOM LIST

NO.	MATERIAL CODE	MATERIAL	SPEC	UNIT	QTY	REMARK
①	10202284500R05	Cable	UL2725 1P*28#+2C*24#+AL+D+B 64 AL-B OD4.5 BLACK 2.0v Printing: E478121 兄 AWM 2725 80°C 30V VW-1 28AWG/1P AND 24AWG/2C USB 2.0 CABLE --- ROHS Compliant --- dueltek.com.au RCM#: E1870 RoHS	M	L	
②	103UA040100003	Connector	USB AM Gold-plated RoHS	PCS	1	
③	103UB040100002	Connector	USB BM Gold-plated RoHS	PCS	1	
④	10901080000001	Solder	Free-lead solder OD0.8 1000G RoHS	G	0.14	
⑤	106PV004500001	Outer mold	Black PVC A813 45P RoHS	Kg	0.012	
⑥	11007000000001	Tie	Black wire RoHS	M	0.06	
⑦	11005050609002	PE bag	0.05mm*6fc*9fc(0.005*15.24*22.86CM) RoHS	PCS	1	
⑧	11005050912008	Mid PE bag	0.05mm*9fc*12fc(0.005*22.86*30.48CM) Printing: "MADE IN CHINA" RoHS	PCS	1/5	
⑨	11006020000811	Sticker 1	Size: 70*70MM color printing RoHS	PCS	1+1/5 +2/150	
⑩	11006020000782	Sticker 2	Size: 70*40MM RoHS	PCS	1/5	
⑪	11001012700018	Carton	K=K+ 41 * 27 * 27CM "M RoHS	PCS	1/150	

Mould:USB:AM:A-1383 USB BM:A-1381

Measuring parameter:Insulation:5MΩ **Continuity test:**5Ω DC:300V

Point out :

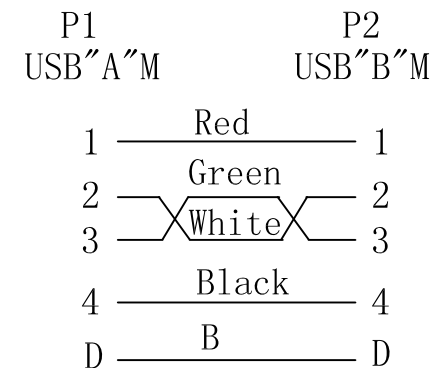

DUELTEK DISTRIBUTION

	SCALE	UNIT:	REV :	DRAWN BY:
	NO.	MM.	A/1	
CUS: TW034	ITEM :	USB AM/AM		CHECK BY:
PART NO. : TW0341605002	DATE:	2016/05/19		APPD BY: