lambert&fils

BEAUBIEN 07



Type Suspension

Materials Body: powder coated aluminium or brass

Hardware: brass

Sphere: milk glass (G50-G80)
Canopy: powder coated steel or brass

Total Height Height to be specified upon order

Weight 24 lb / 10.8 kg

Light Bulb LED (included), 2 x 4.5W + 10 x 3.5W

Sockets G9

Voltage 120V / 240V

Dimmer Refer to our recommended list of dimmer models


Certifications CE


Notes • Must be installed by an electrician


Additional charges for modifications

· Lead time between 7-9 weeks

Dimensions are approximate and may vary slightly

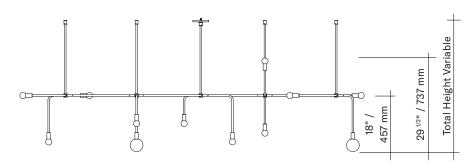




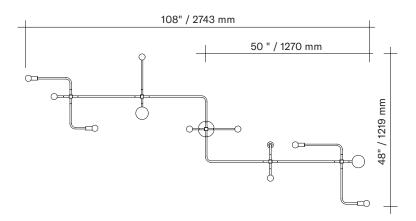

Updated: December 2018

lambert&fils

ORDER GUIDE: SKU

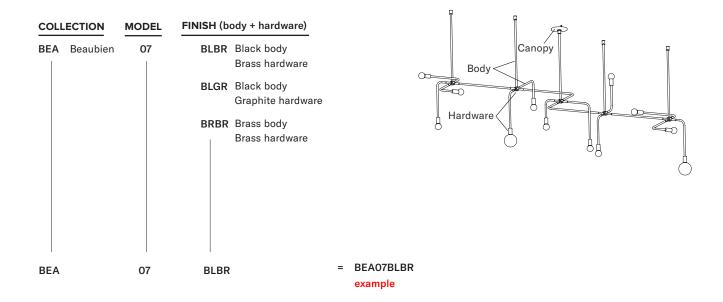

Finish







Brass Flat black

Graphite

Canopy

Swivel option for slanted ceiling



lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS SPHERES Frosted Frosted G80 Ø ±3" / 80 mm 4.5W 3.5W 100V-120V / 240V 100V-120V / 240V 450 Lumens 350 Lumens Ø ±2" / 50 mm 2700 K 2700 K 25 000 H 25 000 H CRI ≥80 CRI ≥80 2 years warranty 2 years warranty

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

⊕ C €

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

LEGRAND - NILOÉ 3 996 35 87% 15% no good NIKO 310-0280X 94% 5% no very good	DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
NIKO 510-0190A 100% 1% 110 Very good	LEGRAND - NILOÉ NIKO	3 996 35 310-0280X	87% 94%	15% 5%	no no	very good
	NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.