


FLG 64 GREEN HP

Green laser lines for exceptional visibility

 green laser

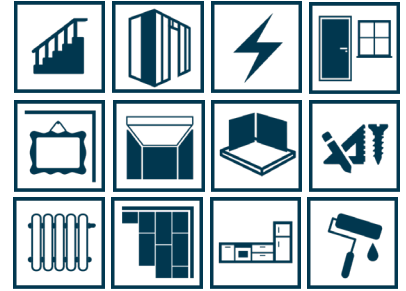

TECHNICAL DATA	FLG 64-GREEN HP	FEATURES	SUPPLIED WITH FLG 64-GREEN HP
			ART.-NO. 580400
Self-levelling range	± 3°	<ul style="list-style-type: none"> · 4 vertical lines at 90° to each other · 1 horizontal line 130° · Plumb down beam (red) · Laser lines switchable separately · Plumbing function · Self-levelling function can be locked for manual use (inclined applications) · Audible and visual alarm when out of level · Use with receiver FR 55 / 55-M (optional) · Integrated floor tripod · Slow motion screw for horizontal alignment · 5/8" thread for use with tripods etc. 	<ul style="list-style-type: none"> · Li-Ion batteries · Charger · Alkaline battery box · Laser intensive glasses · Magnetic target · Container
Accuracy	± 2 mm / 10 m		
Working range (radius)			
-without receiver	30 m*		
-with receiver (optional)	60 m		
Power supply	Li-Ion		
Operating time (all lines switched on)	7 h		
Charger can be used as power supply	yes		
Dust / water protection	IP 54		
Laser class	2		
Temperature range	-5°C to +50°C		
Weight (instrument with battery)	1,3 kg		
	* depending on room illumination		