
MALTA DYNAMICS

RIGID POST GALVANIZED ANCHOR SERIES

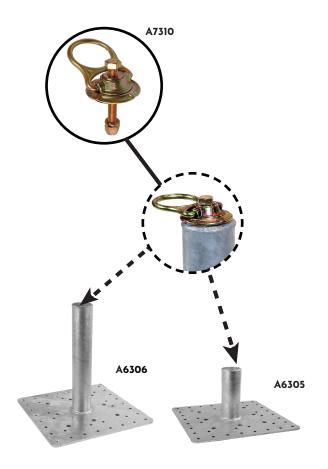

The Rigid Post Anchor is a fixed post roof top anchor intended for permanent applications. The Rigid Post Anchor has been thoroughly tested and is compatible for installation on steel and concrete substrates (fasteners sold separately). Standard anchors (A6300 & A6301) meet the requirements for anchors rated for window cleaning. The anchor post (available in both 12" and 18" heights) functions by extending through roofing materials and is compatible with standard pipe flashing providing waterproof anchorage for years to come. The Rigid Post Anchor is composed of durable galvanized steel, and is compatible for use with appropriately rated SRLs, vertical lifelines, and shock absorbing lanvards.

Threaded top accommodates a variety of anchor points.

Threaded Top Takes 1/2*-13 Hex Bolt

A6300

Key Features

- For use on Steel, Concrete and Wood Substrates (See Manual for Requirements)
- Durable Galvanized Finish
- Great for use with Retractable Lifelines, Vertical Lifelines, or Rope Grab Units
- Post Extends Past Roofing Substrate to make Attachment Point Accessible
- Round Post Works with Most Pipe Flashing Kits
- Meets OSHA 1910 and OSHA 1926 Subpart M
- Meets IWCA I-14.1 (A6300 and A6301)
- · Custom Sizes Available

Part #	Part Name	Weight
A6300	Roof Anchor 12" Standard	32.7 lbs.
A6305	Roof Anchor 12" Threaded Top	32 lbs.
A6301	Roof Anchor 18" Standard	35.1 lbs.
A6306	Roof Anchor 18" Threaded Top	35.8 lbs.
A7310	Swivel Anchor Point (5K)	1.1 lbs.





