
Sanitary Tri-Clamp Gaskets Spec Sheet



---- FKM (Viton) Tri Clamp Gasket

FKM gaskets also known by their trademark name Viton[®], are fluorocarbon rubber gaskets that have excelled resistance to high temperatures, ozone, mineral oil, synthetic fluid, aromatics, and organic solvents and chemicals. They are one of the most commonly used gaskets in extraction due to their solvent resistance and durability. Though not as long lasting as PTFE, they are softer which makes them far easier to seal.

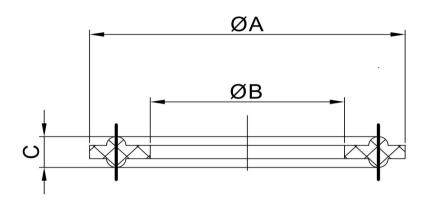

Material: Viton							
Temp. Range: -40°F~446°F							
SKU	SIZE	ØA		ØB		С	
		in	mm	in	mm	in	mm
EXA-Gasket-VITON-1.5IN	1 1/2"	1.988	50.5	1.378	35	0.197	5
EXA-Gasket-VITON-2IN	2''	2.520	64	1.890	48	0.197	5
EXA-Gasket-VITON-3IN	3"	3.583	91	2.835	72	0.197	5
EXA-Gasket-VITON-4IN	4''	4.685	119	3.858	98	0.197	5
EXA-Gasket-VITON-6IN	6''	6.575	167	5.827	148	0.197	5
EXA-Gasket-VITON-8IN	8"	8.543	217	7.874	200	0.197	5
EXA-Gasket-VITON-10IN	10"	10.551	268	9.764	248	0.197	5
EXA-Gasket-VITON-12IN	12"	12.559	319	11.732	298	0.197	5

Hardware Factory Store Inc.

1029 N Todd Ave. Azusa, CA 91702

TEL: 626.332.7744

E-MAIL: info@hfsusa.com

WEBSITE: https://hardwarefactorystore.com/

