



Units 1-3 Shannon Industrial Estate
Lodge Road
Sandbach
Cheshire
CW11 3HP

e. info@euroacc.co.uk
w. www.@euroacc.co.uk

Data Sheet

Expansion Dowel Sleeves & Caps

Dowel Bar Sleeves provide a very successful and efficient method of debonding Mild Steel Dowel Bars. When compared to debonding paint the sleeve is quick to fit and clean to handle - and the operation may be carried out at any time convenient to the contractor.



Dowel Bar Caps are a quick and easily applied cap designed to take up joint movement during expansion when used with sleeved dowel bars. Supplied complete with compressible filler end.

Fitting

The most common method is "by hand". Once the Dowel Bar is inserted into the sleeve, the trapped air in the sleeve escapes along the bar enabling the sleeve to be fitted in one quick action. For very large contracts a special Bench Fitting Tool is available..

Applications

Contraction joints and expansion joints in motorways - structures - airfields - industrial flooring etc. Note the illustration showing how it is used in conjunction with Dowel Bar Caps.

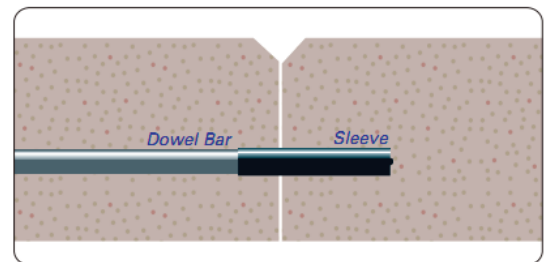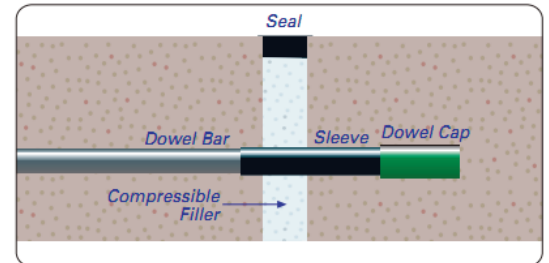

Product Code	Size (mm)	Pack Size	Pallet Size
EDS12	12 x 450	100	5000
EDS16	16 x 300	100	5000
EDSL16	16 x 450	100	5000
EDS20	20 x 300	100	5000
EDS25	25 x 300	100	5000
EDS32	32 x 375	50	2500

Product Code	Size (mm)	Pack Size	Pallet Size
EDC12	12 x 100	100	40000
EDC16	16 x 100	100	40000
EDC20	20 x 100	100	20000
EDC25	25 x 100	100	20000
EDC32	32 x 100	50	10000
EDC40	40 x 100	50	10000

