


Technical Specification/Product Datasheet

Clark-Drain Ltd.,
Station Road,
Yaxley,
Peterborough,
PE7 3EQ.
England.

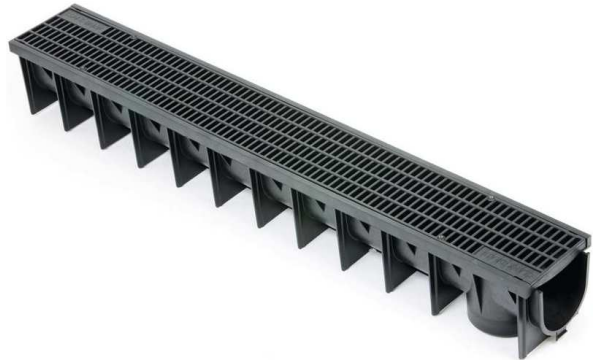

Specific Product Codes:	CD 422												
Product Group:	Linear Drainage												
Sub-Category:	A15 Light/Pedestrian Duty Plastic Channel												
Material Grade/s:	Polypropylene Grade AP9												
Basic Dimensions (mm):	<table> <tr> <td>Length =</td> <td>1000</td> </tr> <tr> <td>Internal Width =</td> <td>96</td> </tr> <tr> <td>External Width =</td> <td>142</td> </tr> <tr> <td>Internal Height =</td> <td>105</td> </tr> <tr> <td>External Height =</td> <td>135</td> </tr> <tr> <td>Slot Size =</td> <td>8 x 23</td> </tr> </table>	Length =	1000	Internal Width =	96	External Width =	142	Internal Height =	105	External Height =	135	Slot Size =	8 x 23
Length =	1000												
Internal Width =	96												
External Width =	142												
Internal Height =	105												
External Height =	135												
Slot Size =	8 x 23												
Waterway Area (cm ²):	600												
Max Through-Flow (l/s):	4.3												
Weight (kgs):	3.0												
Load Rating Classification:	A15 (1.5 tonnes)												
Features:	<ul style="list-style-type: none"> - All-plastic non-rusting design - Lightweight - Available with a range of accessories (end-caps, debris trap, and NEW CD 406 Quad Junction box) - Heat resistant (ideal for tarmac edging) - Mesh 'snap-lock' grating; easy to remove for cleaning and maintenance - 'SpringLock' channel-to-channel male/female connection allows several metres of channel to be laid at a time - Available in packs of 64 or 96 - Provision for locking screws in grating (purchased separately) - Suitable for garage thresholds, patios, gardens and play areas 												

Date Issued: 19/07/17