## OS DUCATI MONSTER 1100

## <><<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

REMOVE: Seat.

UNBOLT: Rear fender (4 allen bolts

under points shown)
FIG\*(A) and unplug wire
next to subframe.

REMOVE: Cover from back of fender

(3 allen bolts) FIG\*(B) and disconnect seat latch cable.

REMOVE: Turn signals and tail light

from rear fender.

REMOVE: Lock from fender FIG\*(C)

\*note\* you may have to tap nut with a screw driver if no access for wrench.

EXCHANGE: Seat latch bolts for longer

6x30m FIG\*(D).

MOUNT: Tail light to Tail Ligh Mount

and Backing Plate FIG\*(E).

CUT: Bullet connectors from

License Light and replace with Spade Connectors

s pplied FIG\*(F).


ADHERE: License Light o bott m of


Tail Light Moun FIG (G).

MOUNT: Lock to Belly Pan FIG\*(H) use spacer between Belly

Pan and cable bracket.






















The purchaser releases Competition Werkes inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1DMON3 PAGE: 1

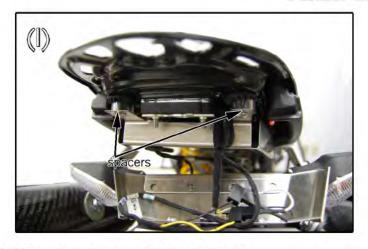



MOUNT: Belly Pan (4- 6x16 Allen bolts with

Spacers above) FIG\*(I). Connect seat latch cable. Route wires as shown.

MOUNT: Turn signals to Signal Brackets

FIG\*(J) use stock backing tabs.

ROUTE: Signal wires up through grommets

and out space shown FIG\*(I), plug in.

PLUG IN: Tail Light and License Light.

PLACE: Lip of License Pan over Tail Light

Mount and secure to seat latch olts using supplied 6m nuts. \*note\* bolts can be loosened to allow fir needed

adjustment.

License plate us ng 2- 6x10 Allen MOUNT:

Bolts in lower holes.

MOUNT: Signal Brackets to License Pan

in upp r holes using 6x12 Allen

B Its.

CHECK: Lighting.

REPLACE: Seat.

## PARTS LIST:

1- Belly Pan 1- License Pan 1- Lock Spacer

1- Tail Light Mount

1- Backing Plate

1- License Light

2- Signal Brackets 2- Med. Grommets

2- 6x30 Allen Bolts

6- Washers

4- Plastic Spacers 4- 6x16 Allen Bolts

6- 6m Nuts

2- 6x12 Allen Bolts

2- 6x10 Allen Bolts

2- Spade Connectors



The purchaser releases Competition Werkes inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

> 1DMON3 PAGE: 2