





06 SUZUKI GSXR 600/750 LTD Fender Eliminator Kit.

- Remove:** Rear seat or cowl, front seat (Allen bolts in side panels), tail section (4 - plastic rivets on bottom, 2 bolts on top, pull plungers out on sides and slide back, unplug tail light, disconnect rear seat latch cable). Set aside.
- Remove:** Rear fender *FIG(A) (4 - bolts on bottom, unplug license light). Should look like *FIG(C) at this point.
- Cut:** License light wire as shown in *FIG(D).
- Remove:** Center bolt from hugger fender. *FIG(B)
- Cut:** Wires on supplied License light to 2", and adhere light to Main pan.
- Connect:** Wire extension to License light using Butt connectors. Route wire extension through obround hole in Main pan.
- Run:** Wire extension through Black conduit. Insert Black conduit into obround hole 1/2". *FIG(E)
- Position:** Main pan under hugger fender and mount to swingarm using the stock bolt. *FIG's (B&E)
- Route:** Black conduit and Wire extension up into battery area.
- Connect:** Previously cut license light wire to Wire extension using Butt connectors *NOTE* CHECK LIGHTING BEFORE MAKING FINAL CONNECTIONS!
- Insert:** Cover plate and secure with 4 - 6x16 Allen bolts.
- Replace:** Tail section and seats using stock hardware. *NOTE* Remember to insert seat latch cable.

PARTS LIST

| | | |
|------------------------|-----------------------|--------------|
| 1 - Cover plate | 1 - 3' Wire extension | 4 - 6mm nuts |
| 1 - Main pan | 4 - Butt connectors | 4 - Washers |
| 1 - License light | 4 - 6x16 Allen bolts | |
| 1 - 1/4" Black conduit | 4 - 6x10 Allen bolts | |

1S756LTD

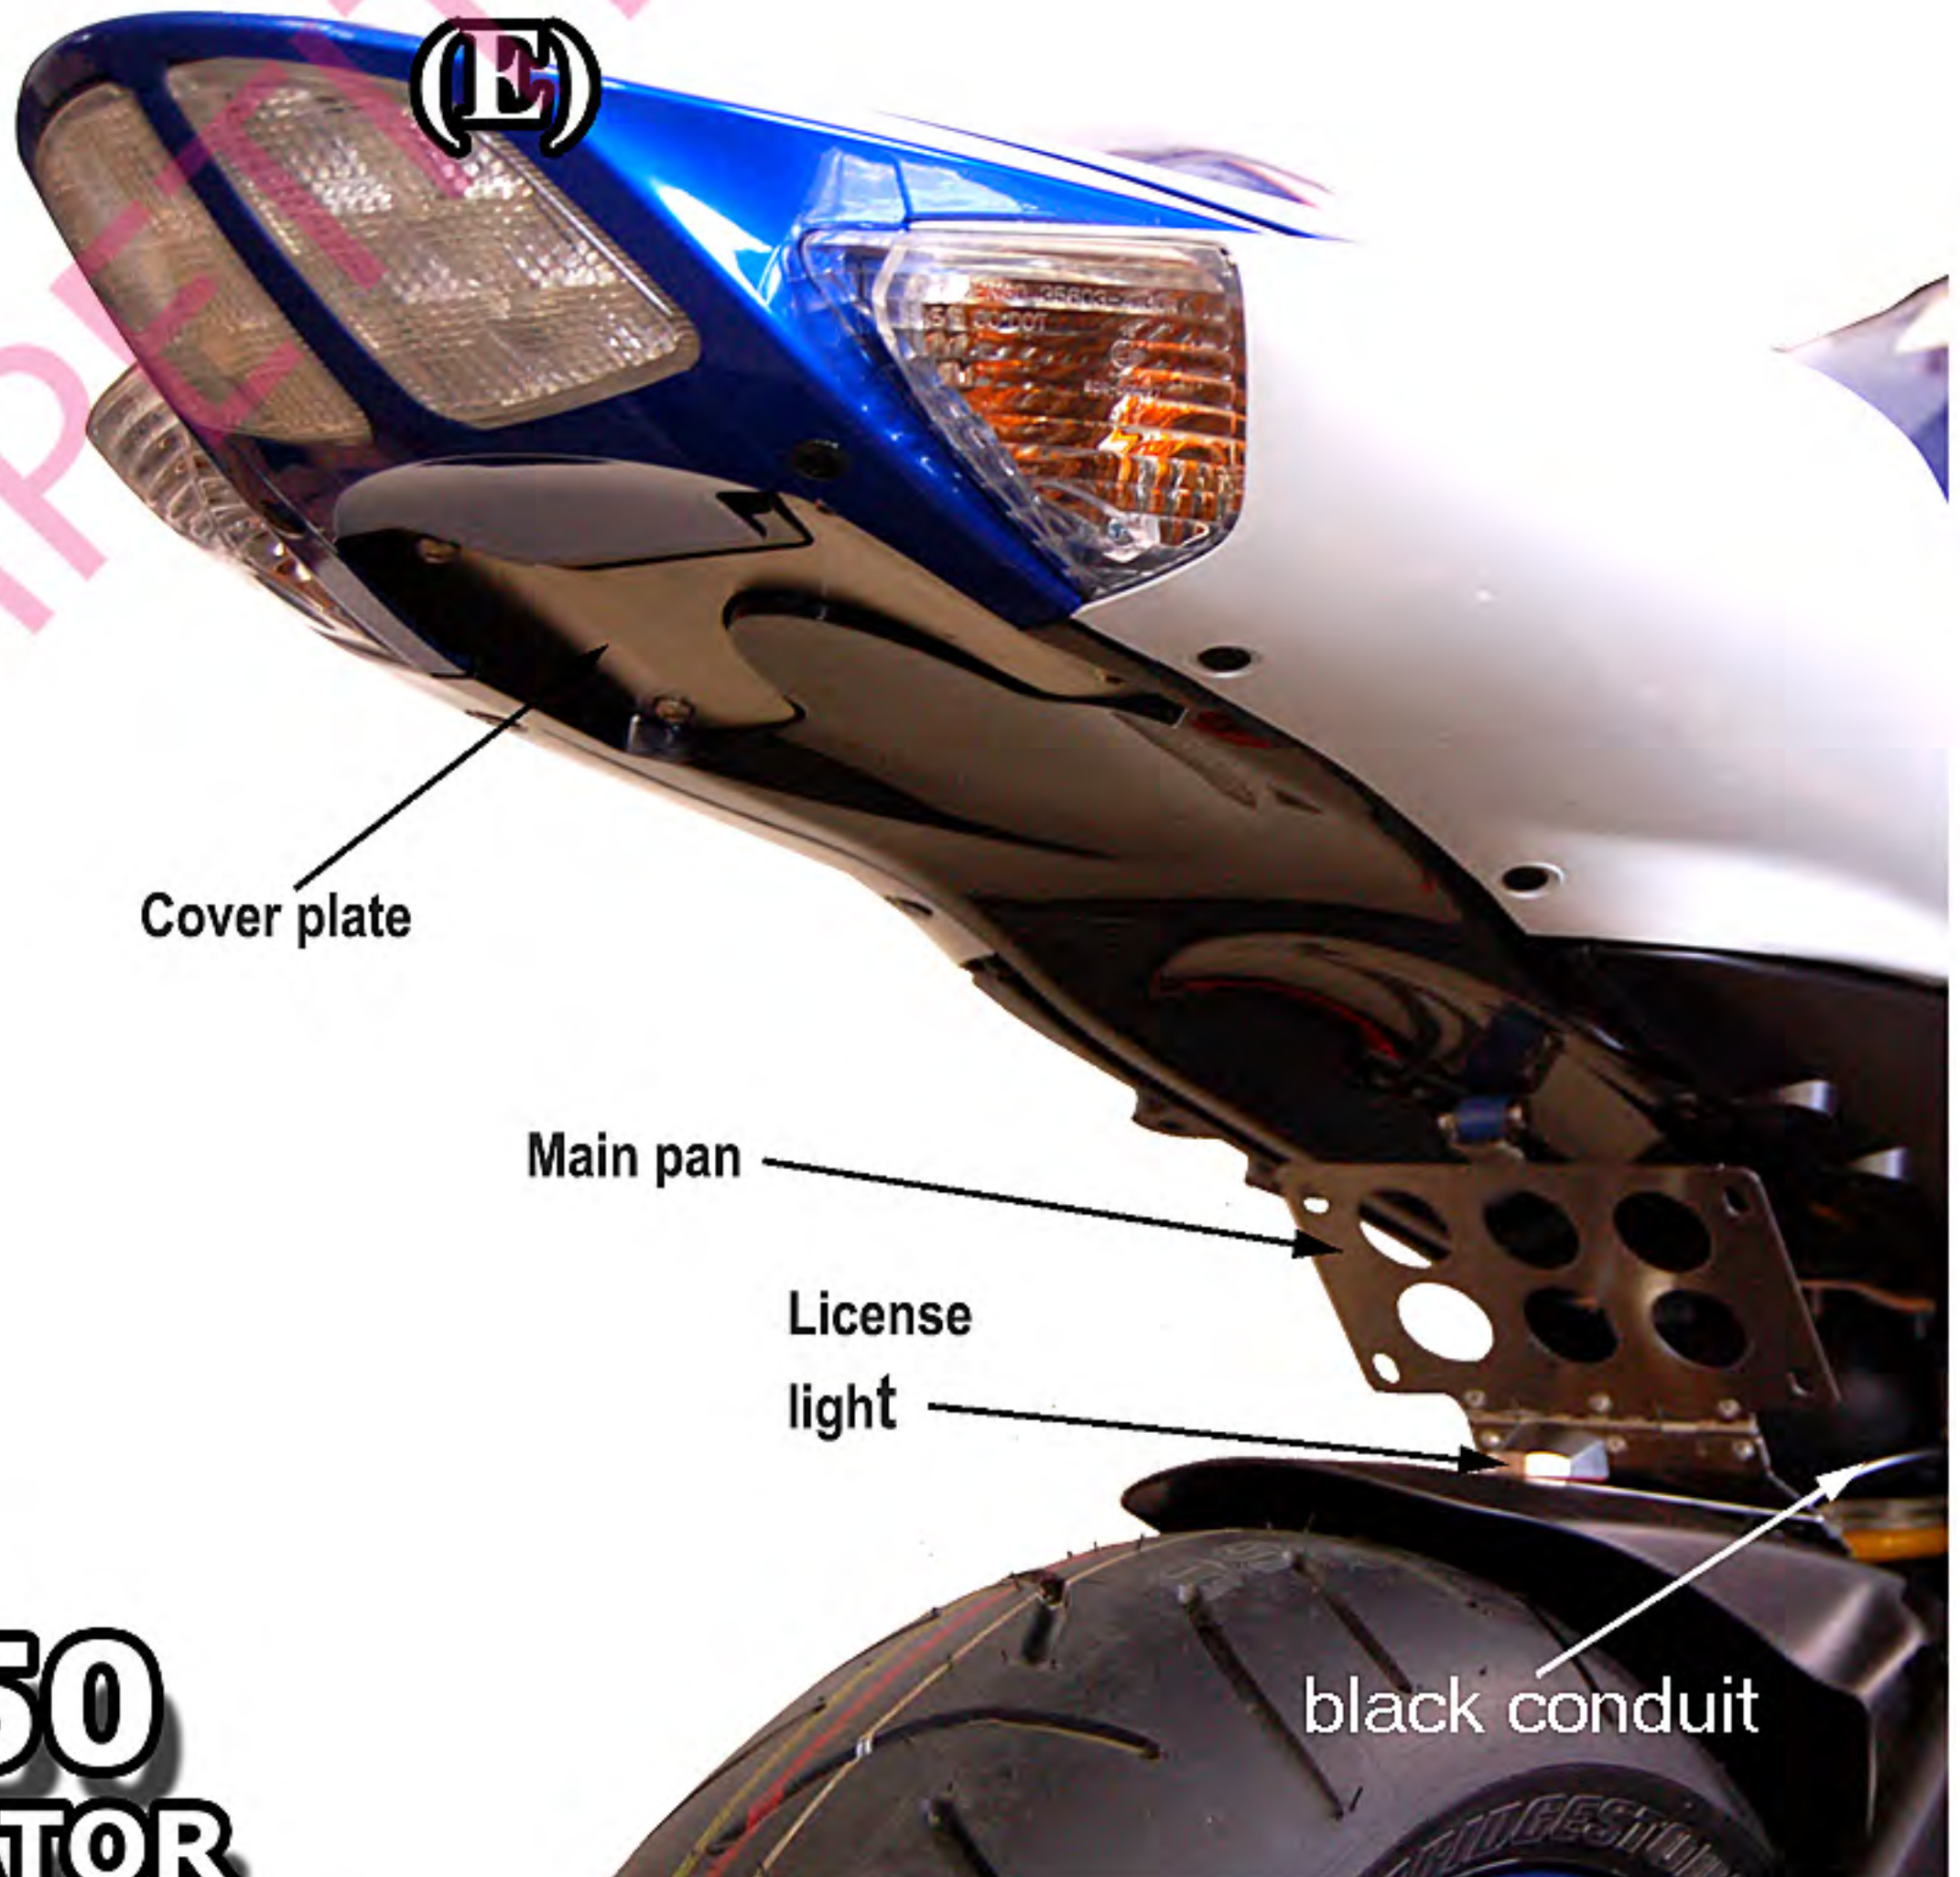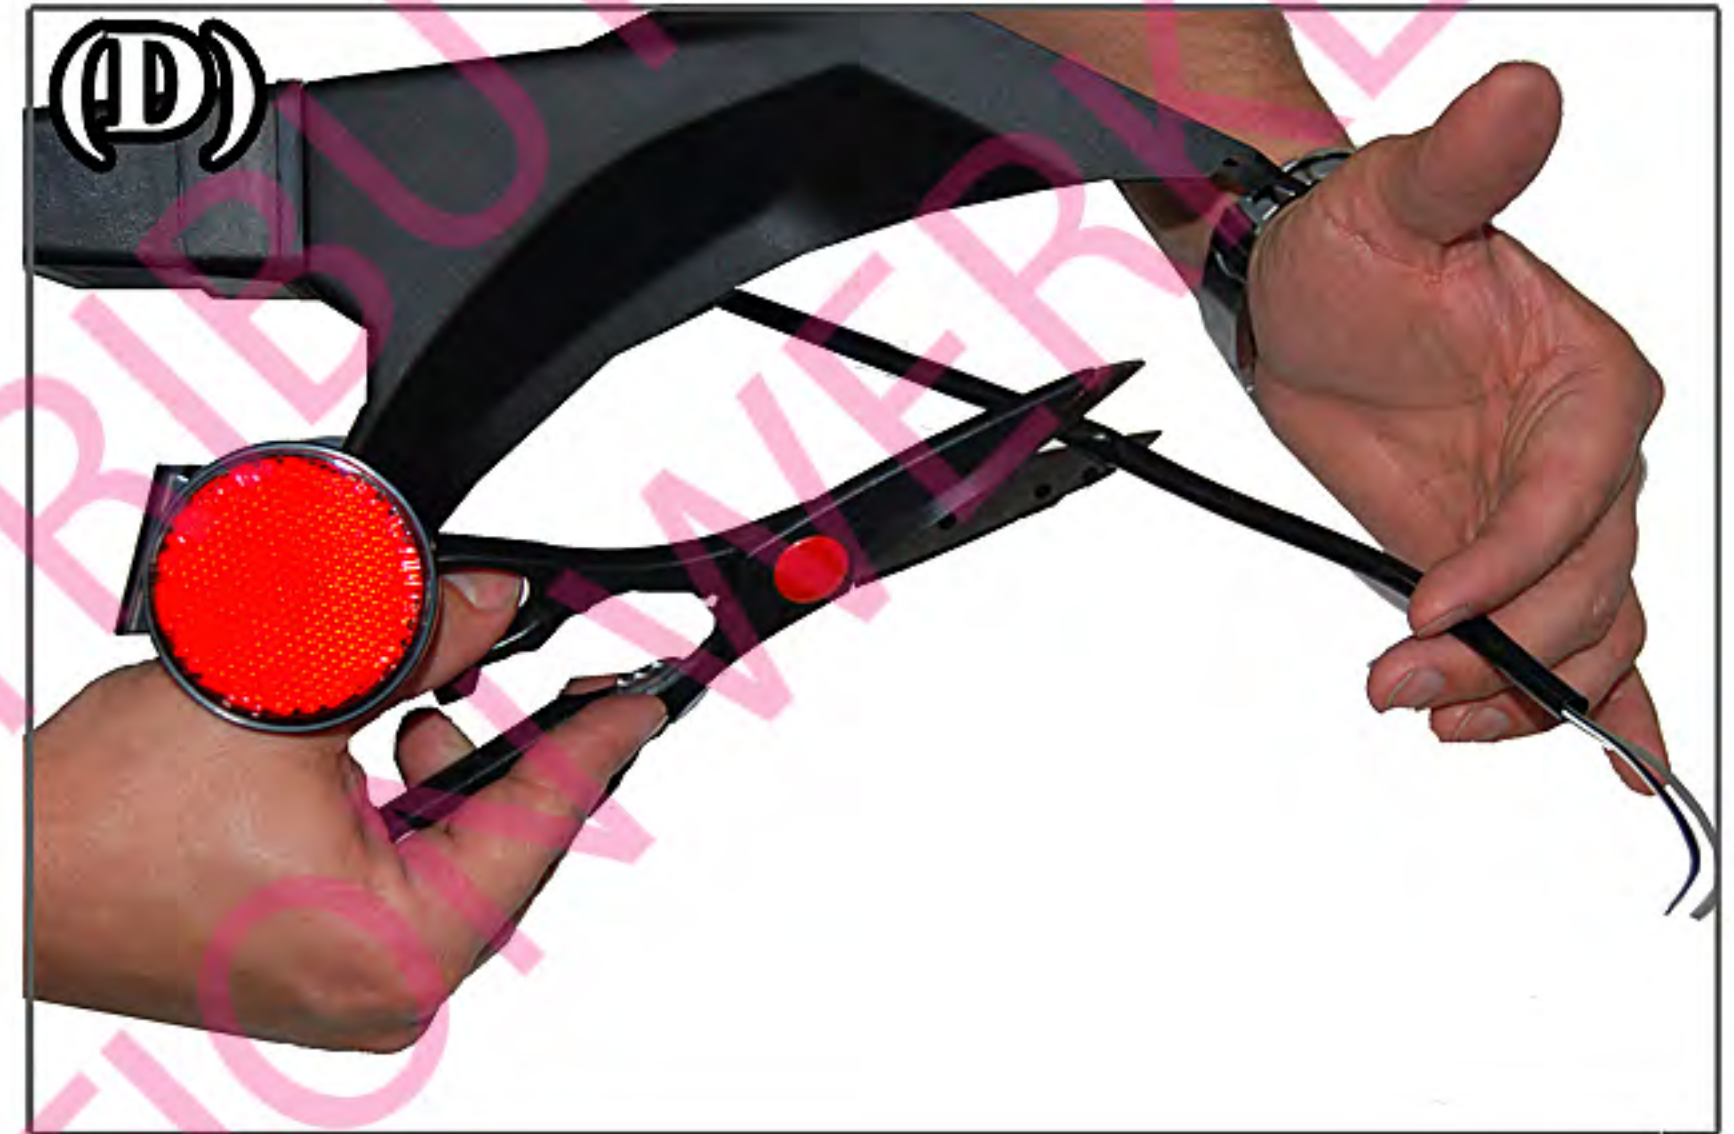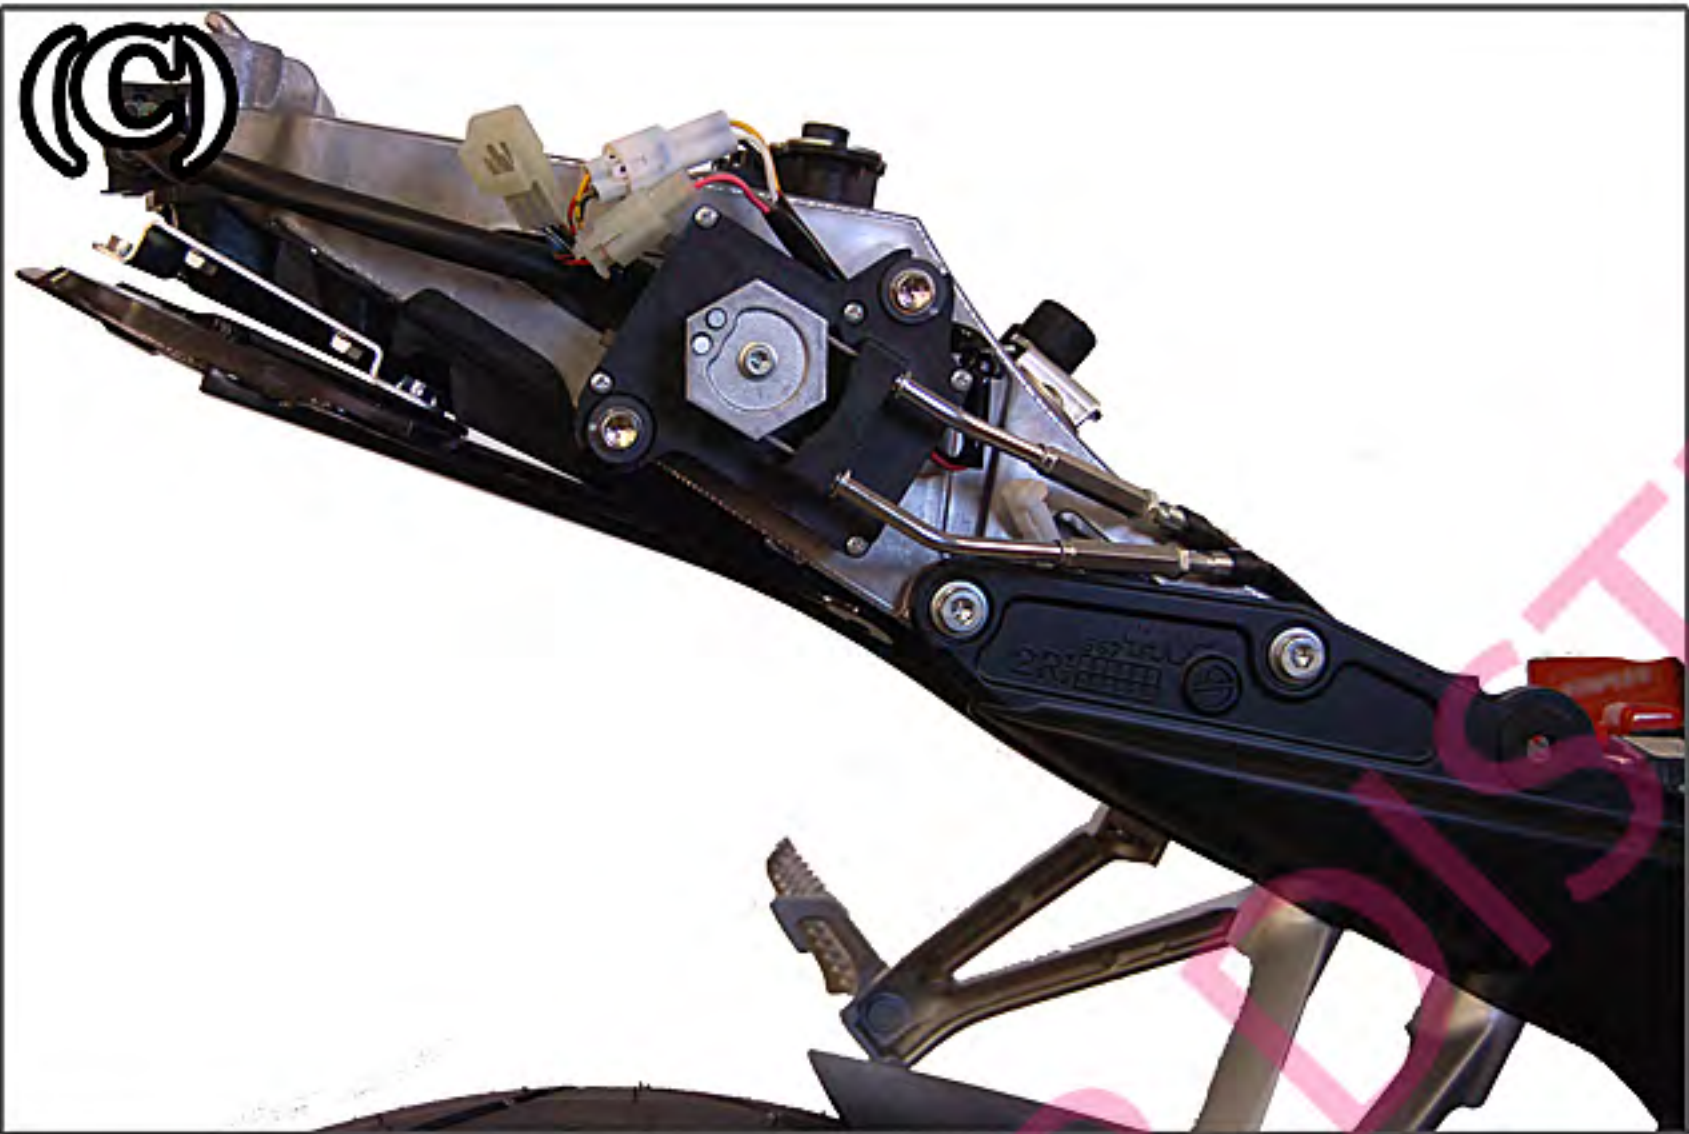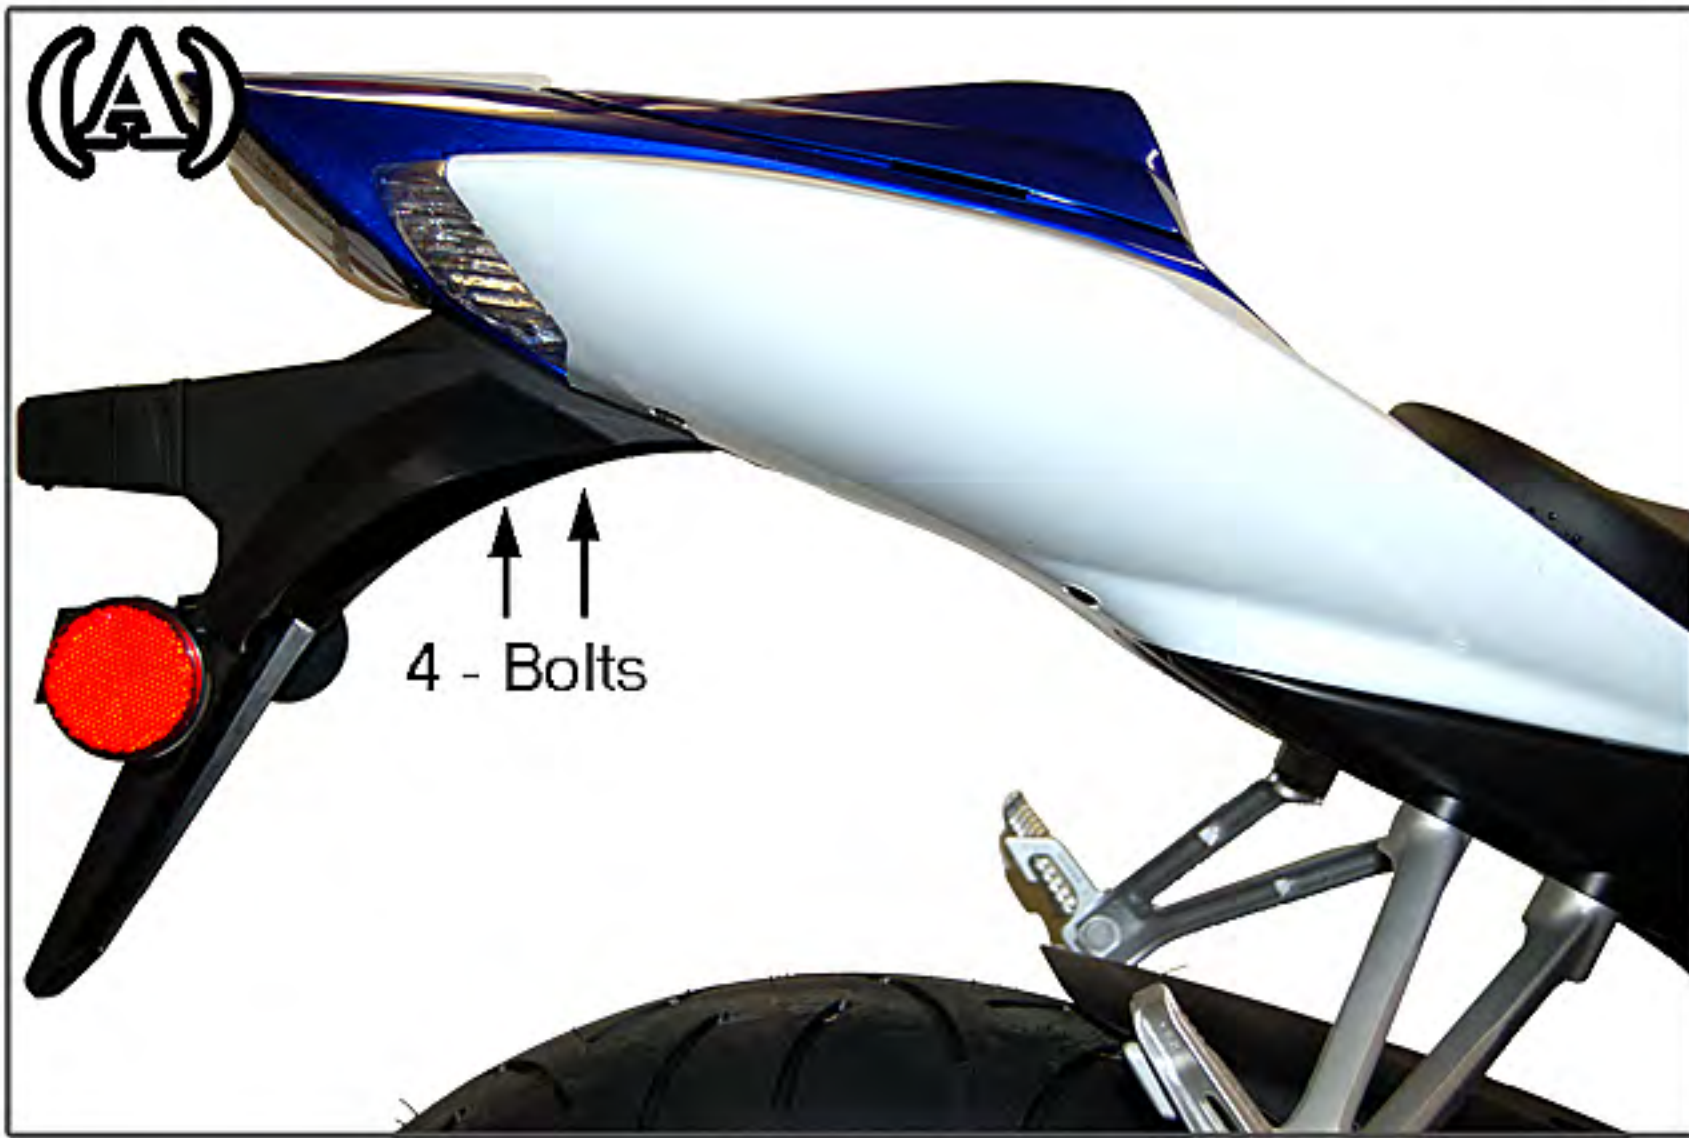

06 SUZUKI GSXR 600/750 LTD FENDER ELIMINATOR