

REV	DESCRIPTION	DATE	INT

SPECSHEET

PVB-2700

Powerlite Second Floor Competition Net System Deluxe 3-1/2" Aluminum Volleyball Upright System with Infinitely Adjustable Height

THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

FAX: 860.444.1779 (SALES) 860.440.0628 (ENG.)


JAYPRO SPORTS, LLC, 976 HARTFORD TURNPIKE, WATERFORD, CT 06385 USA



www.jaypro.com

PHONE: 800.243.0533 (TOLL FREE) 860.447.3001 (LOCAL)

DRAWING NAME/PART NUMBER: PVB-2700	DRAWN BY: MJE	ISSUE DATE: 3/19/2010
CHECKED BY:	SHEET: 1 OF 1	REV:

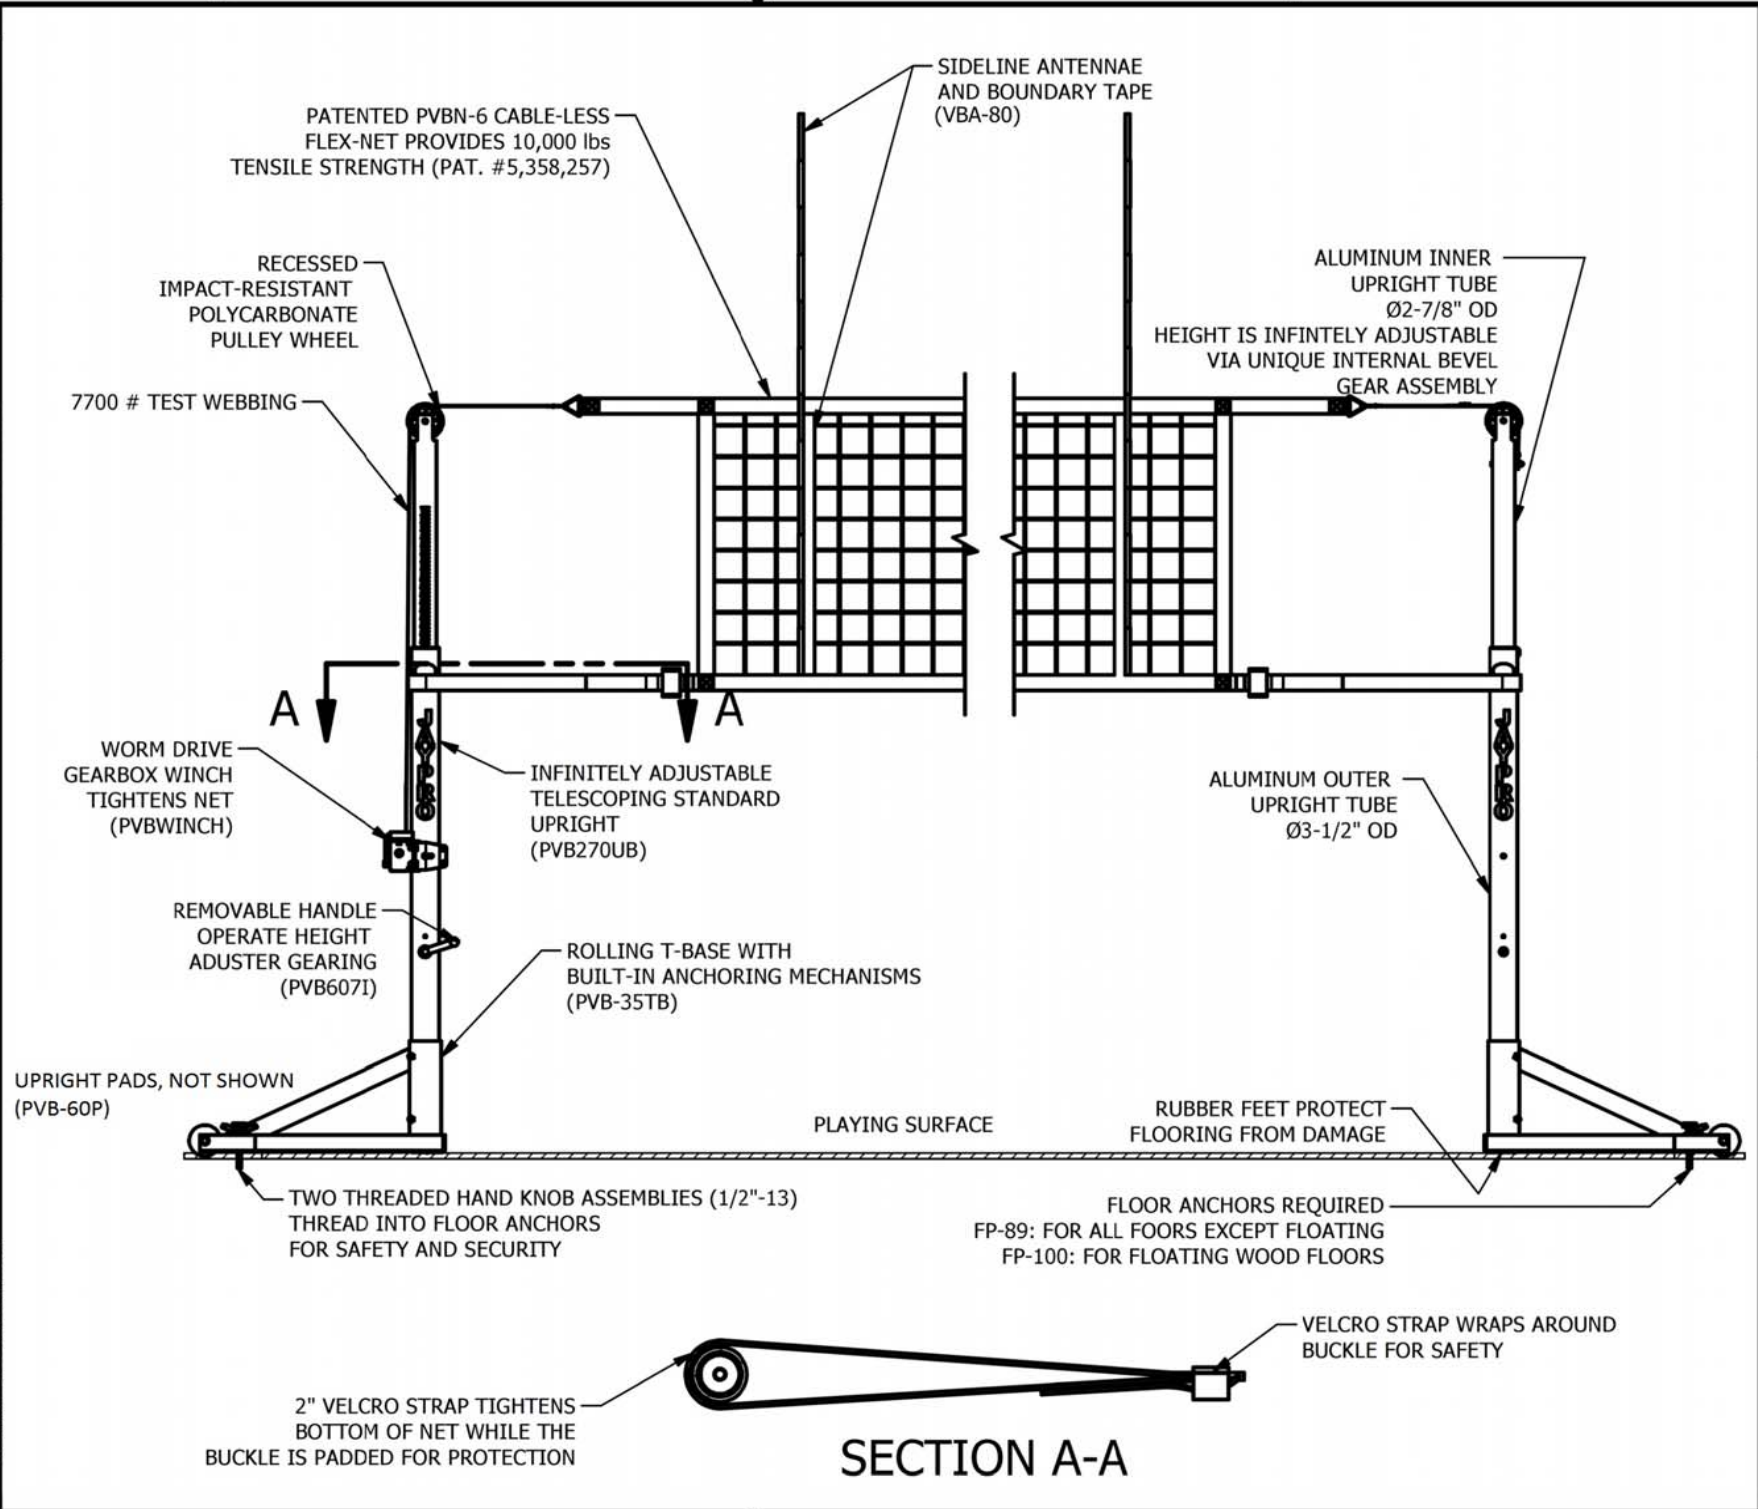

SECTION A-A

JAYPRO MODEL PVB-2700

“Powerlite Second Floor Competition Net System” **DELUXE 3-1/2” DIAMETER ALUMINUM HEIGHT ADJUSTABLE** **VOLLEYBALL SYSTEM**

System shall consist of two uprights, two rolling t-bases, and one winch and shall be supplied fully assembled.

Two piece telescoping uprights shall provide infinitely adjustable net height settings from 6'6" to 8'2" by means of an internal bevel gear design. No field assembly required upon receipt. Lower section of upright shall be constructed of 3-1/2" OD x 0.300" wall aluminum tube with a durable black finish. Upper section shall be constructed of 2-7/8" OD x 0.230" wall aluminum tube with 4" diameter pulley to accommodate the net tensioning straps. Anchor strap shall be adjustable and winch strap shall be long enough to readily adapt to varying sleeve installation widths.

T-bases shall be anchored to the floor by means of two 1/2"-13 externally threaded hand knob assemblies that thread into floor anchors (sold separately, FP-89 or FP-100). T-bases shall have two wheels to permit storage and installation without removing uprights from bases. T-bases shall have rubber foot to protect the finished floor during transportation, storage, and installation of standards.

Tensioning winch shall have an internal worm gear construction with an effective 10:1 turn ratio to eliminate snap-back and shall be completely enclosed with a welded steel cover. The winch shall be furnished with folding handle. Winch will have 1-1/2" wide high tensile strength (7700#) nylon strap with sewn snap buckle for complete cable-less design. Winch is located on outside of post for added player safety.

Standard pads: PVB-60P included w/ PVB-2700. Colors shall be available in any of fourteen (14) different colors (red, navy blue, yellow, light blue, grey, black, maroon, kelly green, forest green, royal blue, pink, tan, purple, orange). Color selection available per request.

Optional base pads: PVB-25P.

PVB-2700