

175FL - GOOSENECK OUTDOOR BACKSTOP


5' EXTENDED OUTDOOR BACKSTOP WITH FAN SHAPED BACKBOARD

Porter

WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

R-175FL

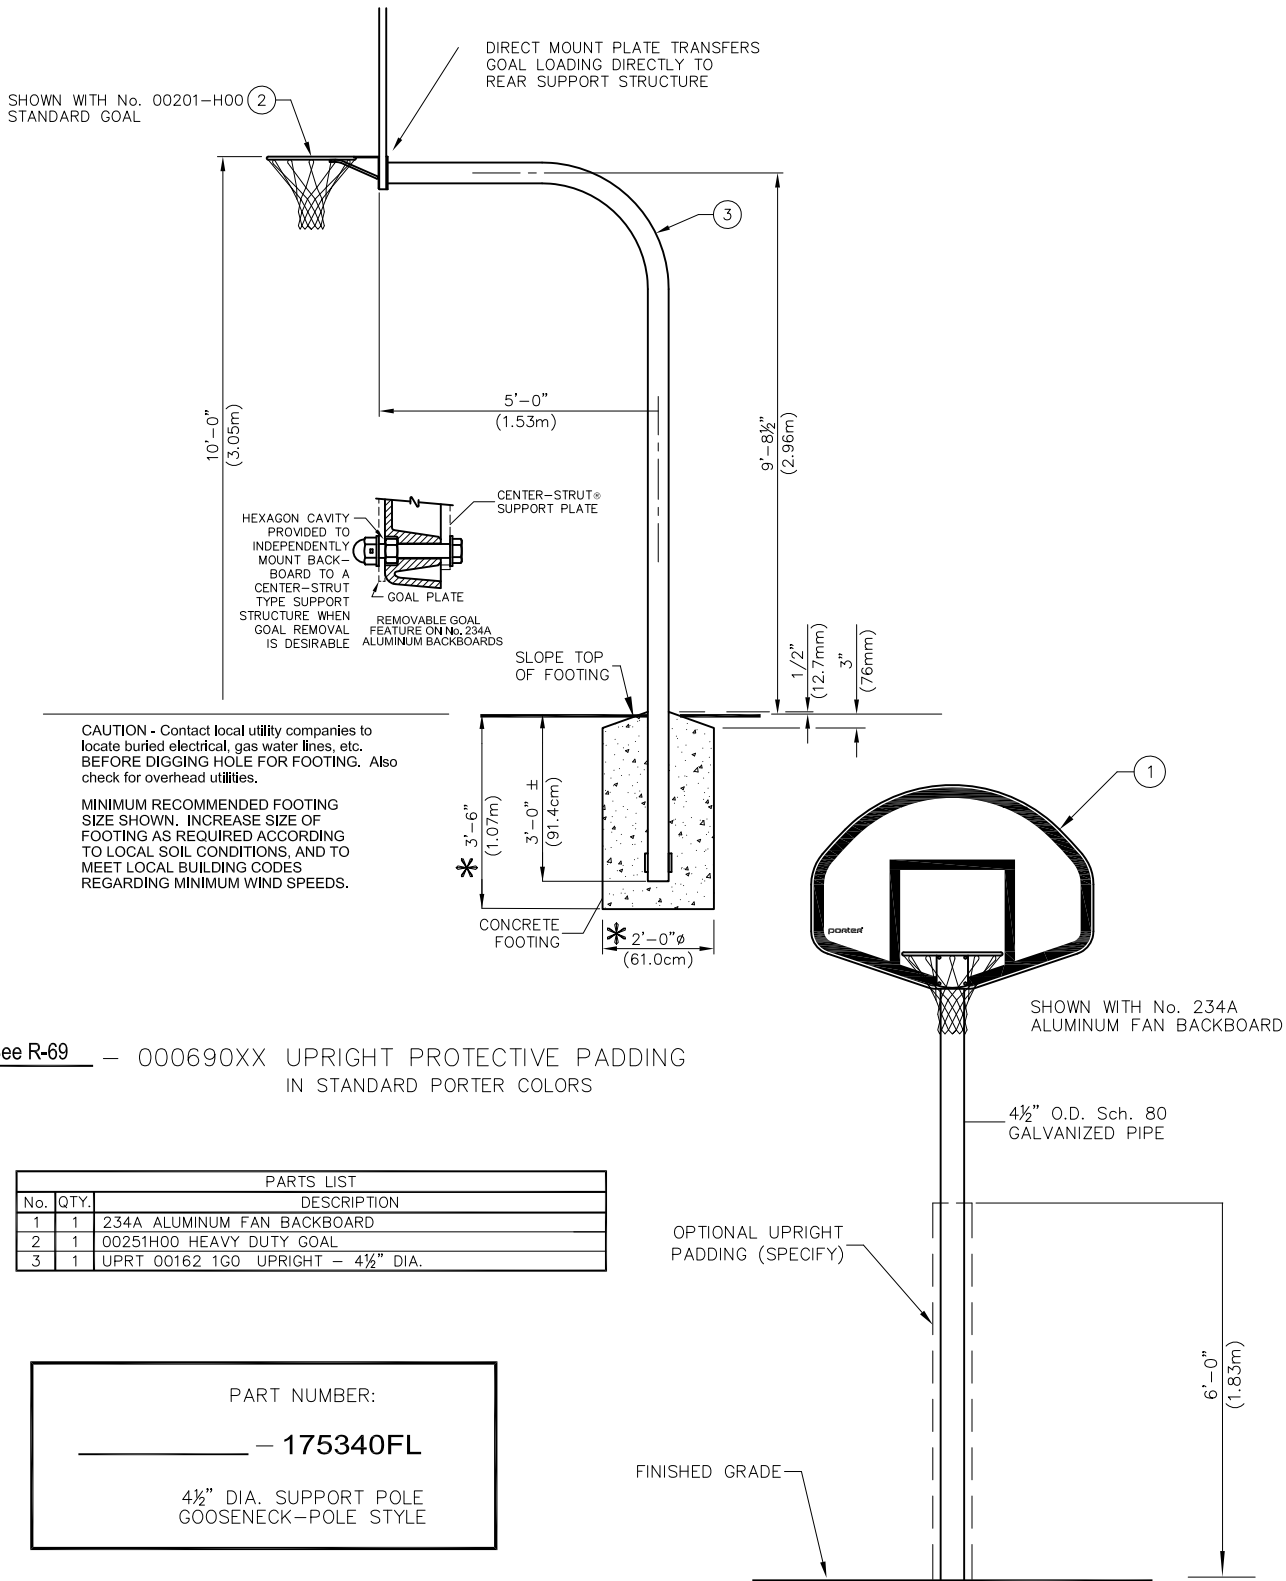

Porter®

1-800-637-3090 PORTER@PORTERATHLETIC.COM
© COPYRIGHT 2017 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

7/18/2017

175FL - GOOSENECK OUTDOOR BACKSTOP

5' EXTENDED OUTDOOR BACKSTOP WITH FAN SHAPED BACKBOARD

SPECIFICATIONS

PORTER No. 175340FL – 5' EXTENDED VERTICAL POST BACKSTOP WITH RECTANGULAR GLASS BACKBOARD AND GOAL

Face of backboard shall be 5'-0" (1.53m) extended from the centerline of the formed upright support. Upright support shall be 4-1/2" (11.4cm) O.D., schedule 80, galvanized steel pipe formed to an approximate 25" (63.5cm) radius. Vertical section shall extend 3'-0" (91.4cm) into a concrete footing and shall be secured by welded anchor lugs. Horizontal section shall be fabricated with a special, slotted mounting plate to level the backboard and goal. Bolts from the front mounted goal shall mount directly through the backboard and into the Center-Strut® mounting plate to eliminate any strain on the backboard should a player hang on the front mounted goal.

Comes with 234A aluminum fan shaped backboard and 00251-H00 heavy duty goal.

Backstop shall meet the Florida Building Code ASCE 7-05 Minimum Design Loads for Buildings and Other Structures requirements.

OPTIONAL ITEMS TO SPECIFY

See Page No. B-69 for specifications on Porter No. 000690XX Upright Padding (Each).

www.porterathletic.com/facility
porter

BASKETBALL SPECIFICATION SHEET

R-175FL