

## Kabin Pak HE System

The Kabin Pak System Boilers (KSHE) are supplied as a kit, consisting of a Kabin Pak Pumped Boiler (KPHE) (see above) and a System Kit.

As described above, the Kabin Pak Pumped Boiler (KPHE) is supplied with a pre-wired factory-fitted burner, thermostat and circulating pump. Only one IE320 mains socket (supplied) needs to be wired on site. The multi-optional low-level flue can be positioned to exhaust from the back, left or right hand side of the casing.


The System Kit consists of a pre-assembled expansion vessel, pressure gauge and filling loop. A pressure hose for connection to the system is also supplied. The System Kit can be connected in only a few minutes creating a sealed heating system.

Models up to 120HE are supplied with System Kit SK1 having a capacity of 12 litres suitable for a maximum total system volume of 145 litres. Refer to BS7074 and the Boiler Manual for further guidance on expansion vessel sizing.



**Heat IQ**  
Inovative heating

	KS70HE	KS90HE	KS120HE
Output (kW)	15-21	21-26	26-33
Flue Options	Left, right or rear low-level conventional flue, optional top outlet		
Conventional flue size (mm)	n/a	Integral item	
Sedbuk rating	A	Highest rating for boiler efficiency in the UK	
Height (mm)	900		
Depth (mm)	700		
Width (mm)	413		
Service access	Front		
Condensate trap	Factory fitted	Manufactured by Warmflow in Ireland this is one of the most popular oil boilers available in Europe Easy to Fit Easy to maintain and Easy on the pocket	
Hot water flow rate (L/min)	n/a		

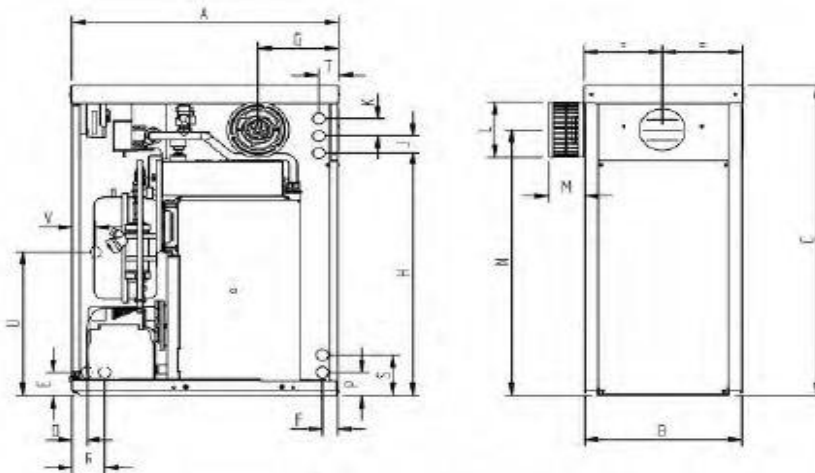

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V
KS~	703	413	900	40	67	40	210	705	50	50	161	93	773	67	90	117	52	415	85