

## AT9429

AT9429/ES/WW

14W A60 LED lamp. Non dimmable. Frosted lens

### Features

- Energy efficient LED lamp
- Long Life
- No mercury Content
- Suitable replacement for halogen and incandescent lamps



### ORDERING INFORMATION

<b>Order code</b>	12488
<b>Description</b>	A60 14W LED LAMP E27 WW NON-DIM FROSTED
<b>Driver Type</b>	Fixed output
<b>Item Code</b>	AT9429/ES/WW

### MECHANICAL

<b>Adjustability</b>	Fixed
<b>Diffuser Material</b>	Polycarbonate
<b>Product Finish</b>	Frosted
<b>Fitting Colour</b>	White
<b>IP Rating</b>	IP20

### ELECTRICAL

<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	15.1 W
<b>Power Factor</b>	0.5
<b>Switch Type</b>	Inline
<b>System Max Wattage</b>	14 W
<b>Working Temp Range</b>	-20 to 40 °C

### LAMP

<b>Beam Angle</b>	300 °
<b>Bulb Type</b>	A60
<b>CCT Configuration</b>	Single
<b>CRI</b>	>80
<b>Globe Base</b>	E27
<b>Globe Included</b>	Yes
<b>Lamp/LED Current</b>	41 mA
<b>Lamp/LED voltage</b>	270 V
<b>Led Package</b>	2835
<b>Maximum Bulb Wattage</b>	15 W
<b>Number of Lamps</b>	1

### LED LIFETIME

<b>LED Lifetime</b>	15000 hrs
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.	

## COLOUR TEMPERATURE

<b>CCT</b>	3000 K
<b>CCT Colour</b>	Warm White
<b>LED Wattage</b>	11.1 W
<b>System Lumens</b>	1521 lm
All photometric data has a tolerance of ±10%.	

## DRIVER

<b>Dimmable</b>	No
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	Yes
<b>Driver Type</b>	Fixed output

## COMPLIANCE

<b>Product Design Life</b>	10 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	

<b>Daily Use</b>	4 hrs
The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.	

<b>Standards</b>	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

## WARRANTY

<b>Domestic Use Warranty</b>	1 (Yr) RTB
<b>VIP Warranty</b>	2 RTB (Total 2 Years)
VIP warranty is available to registered users and is subjected to additional terms and conditions.	


<b>Warranty Operating Hours</b>	500 hrs
This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).	

## DIMENSIONS

<b>Product Diameter</b>	60 mm
<b>Product Height</b>	120 mm
<b>Product Weight</b>	44 g
<b>Product Width</b>	60 mm

## PHOTOMETRICS

### AT9429/ES/WW

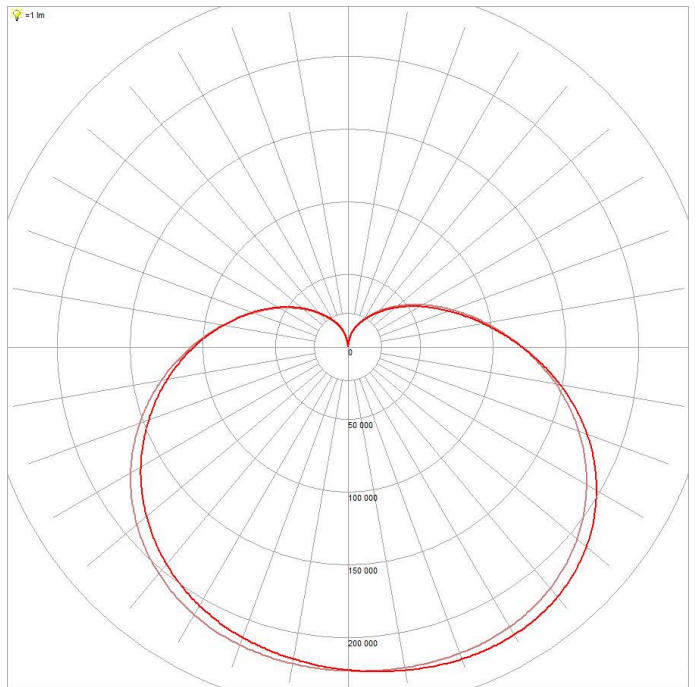

## AT9429

AT9429/ES/CW

14W A60 LED lamp. Non dimmable. Frosted lens

### Features

- Energy efficient LED lamp
- Long Life
- No mercury Content
- Suitable replacement for halogen and incandescent lamps



### ORDERING INFORMATION

<b>Order code</b>	12489
<b>Description</b>	A60 14W LED LAMP E27 CW NON-DIM FROSTED
<b>Driver Type</b>	Fixed output
<b>Item Code</b>	AT9429/ES/CW

### MECHANICAL

<b>Adjustability</b>	Fixed
<b>Diffuser Material</b>	Polycarbonate
<b>Product Finish</b>	Frosted
<b>Fitting Colour</b>	White
<b>IP Rating</b>	IP20

### ELECTRICAL

<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	15.1 W
<b>Power Factor</b>	0.5
<b>Switch Type</b>	Inline
<b>System Max Wattage</b>	14 W
<b>Working Temp Range</b>	-20 to 40 °C

### LAMP

<b>Beam Angle</b>	300 °
<b>Bulb Type</b>	A60
<b>CCT Configuration</b>	Single
<b>CRI</b>	>80
<b>Globe Base</b>	E27
<b>Globe Included</b>	Yes
<b>Lamp/LED Current</b>	41 mA
<b>Lamp/LED voltage</b>	270 V
<b>Led Package</b>	2835
<b>Maximum Bulb Wattage</b>	15 W
<b>Number of Lamps</b>	1

### LED LIFETIME

<b>LED Lifetime</b>	15000 hrs
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.	

## COLOUR TEMPERATURE

<b>CCT</b>	4000 K
<b>CCT Colour</b>	Cool White
<b>LED Wattage</b>	11.1 W
<b>System Lumens</b>	1600 lm
All photometric data has a tolerance of ±10%.	

## DRIVER

<b>Dimmable</b>	No
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	Yes
<b>Driver Type</b>	Fixed output

## COMPLIANCE

<b>Product Design Life</b>	10 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	

<b>Daily Use</b>	4 hrs
The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.	

<b>Standards</b>	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

## WARRANTY

<b>Domestic Use Warranty</b>	1 (Yr) RTB
<b>VIP Warranty</b>	2 RTB (Total 2 Years)
VIP warranty is available to registered users and is subjected to additional terms and conditions.	


<b>Warranty Operating Hours</b>	500 hrs
This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).	

## DIMENSIONS

<b>Product Diameter</b>	60 mm
<b>Product Height</b>	120 mm
<b>Product Weight</b>	44 g
<b>Product Width</b>	60 mm

## PHOTOMETRICS

### AT9429/ES/CW

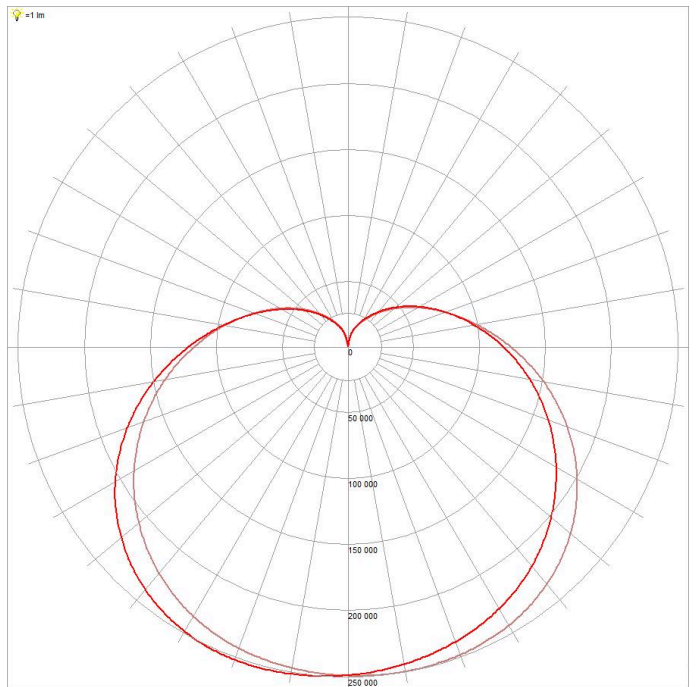

## AT9429

AT9429/BC/WW

14W A60 LED lamp. Non dimmable. Frosted lens

### Features

- Energy efficient LED lamp
- Long Life
- No mercury Content
- Suitable replacement for halogen and incandescent lamps



### ORDERING INFORMATION

<b>Order code</b>	12490
<b>Description</b>	A60 14W LED LAMP B22 WW NON-DIM FROSTED
<b>Driver Type</b>	Fixed output
<b>Item Code</b>	AT9429/BC/WW

### MECHANICAL

<b>Adjustability</b>	Fixed
<b>Diffuser Material</b>	Polycarbonate
<b>Product Finish</b>	Frosted
<b>Fitting Colour</b>	White
<b>IP Rating</b>	IP20

### ELECTRICAL

<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	15.1 W
<b>Power Factor</b>	0.5
<b>Switch Type</b>	Inline
<b>System Max Wattage</b>	14 W
<b>Working Temp Range</b>	-20 to 40 °C

### LAMP

<b>Beam Angle</b>	300 °
<b>Bulb Type</b>	A60
<b>CCT Configuration</b>	Single
<b>CRI</b>	>80
<b>Globe Base</b>	B22 / BC
<b>Globe Included</b>	Yes
<b>Lamp/LED Current</b>	41 mA
<b>Lamp/LED voltage</b>	270 V
<b>Led Package</b>	2835
<b>Maximum Bulb Wattage</b>	15 W
<b>Number of Lamps</b>	1

### LED LIFETIME

<b>LED Lifetime</b>	15000 hrs
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.	

## COLOUR TEMPERATURE

<b>CCT</b>	3000 K
<b>CCT Colour</b>	Warm White
<b>LED Wattage</b>	11.1 W
<b>System Lumens</b>	1521 lm
All photometric data has a tolerance of ±10%.	

## DRIVER

<b>Dimmable</b>	No
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	Yes
<b>Driver Type</b>	Fixed output

## COMPLIANCE

<b>Product Design Life</b>	10 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	

<b>Daily Use</b>	4 hrs
The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.	

<b>Standards</b>	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

## WARRANTY

<b>Domestic Use Warranty</b>	1 (Yr) RTB
<b>VIP Warranty</b>	2 RTB (Total 2 Years)
VIP warranty is available to registered users and is subjected to additional terms and conditions.	


<b>Warranty Operating Hours</b>	500 hrs
This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).	

## DIMENSIONS

<b>Product Diameter</b>	60 mm
<b>Product Height</b>	120 mm
<b>Product Weight</b>	44 g
<b>Product Width</b>	60 mm

## PHOTOMETRICS

### AT9429/BC/WW

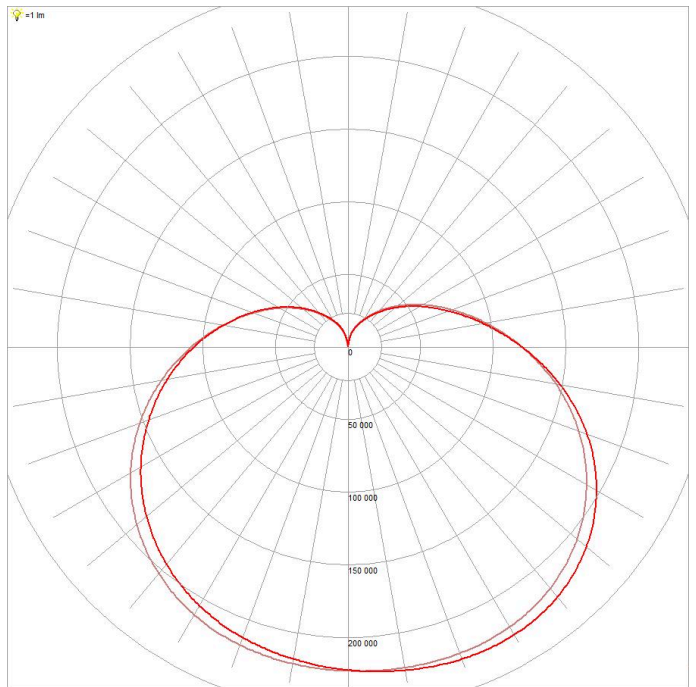

## AT9429

AT9429/BC/CW

14W A60 LED lamp. Non dimmable. Frosted lens

## Features

- Energy efficient LED lamp
- Long Life
- No mercury Content
- Suitable replacement for halogen and incandescent lamps



## ORDERING INFORMATION

<b>Order code</b>	12491
<b>Description</b>	A60 14W LED LAMP B22 CW NON-DIM FROSTED
<b>Driver Type</b>	Fixed output
<b>Item Code</b>	AT9429/BC/CW

## MECHANICAL

<b>Adjustability</b>	Fixed
<b>Diffuser Material</b>	Polycarbonate
<b>Product Finish</b>	Frosted
<b>Fitting Colour</b>	White
<b>IP Rating</b>	IP20

## ELECTRICAL

<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
<b>Maximum Wattage</b>	15.1 W
<b>Power Factor</b>	0.5
<b>Switch Type</b>	Inline
<b>System Max Wattage</b>	14 W
<b>Working Temp Range</b>	-20 to 40 °C

## LAMP

<b>Beam Angle</b>	300 °
<b>Bulb Type</b>	A60
<b>CCT Configuration</b>	Single
<b>CRI</b>	>80
<b>Globe Base</b>	B22 / BC
<b>Globe Included</b>	Yes
<b>Lamp/LED Current</b>	41 mA
<b>Lamp/LED voltage</b>	270 V
<b>Led Package</b>	2835
<b>Maximum Bulb Wattage</b>	15 W
<b>Number of Lamps</b>	1

## LED LIFETIME

<b>LED Lifetime</b>	15000 hrs
This is the Reported LED Lifetime in Hours based on TM-21. Atom does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.	

## COLOUR TEMPERATURE

<b>CCT</b>	4000 K
<b>CCT Colour</b>	Cool White
<b>LED Wattage</b>	11.1 W
<b>System Lumens</b>	1600 lm
All photometric data has a tolerance of ±10%.	

## DRIVER

<b>Dimmable</b>	No
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	Yes
<b>Driver Type</b>	Fixed output

## COMPLIANCE

<b>Product Design Life</b>	10 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	

<b>Daily Use</b>	4 hrs
The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.	

<b>Standards</b>	AS/NZS 62560 IEC/TR 62778 AS CISPR 15
------------------	---

## WARRANTY

<b>Domestic Use Warranty</b>	1 (Yr) RTB
<b>VIP Warranty</b>	2 RTB (Total 2 Years)
VIP warranty is available to registered users and is subjected to additional terms and conditions.	

<b>Warranty Operating Hours</b>	500 hrs
This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).	

## DIMENSIONS

<b>Product Diameter</b>	60 mm
<b>Product Height</b>	120 mm
<b>Product Weight</b>	44 g
<b>Product Width</b>	60 mm

## PHOTOMETRICS

### AT9429/BC/CW

